



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8153,  
2.00GHz

**SPECfp®\_rate2006 = Not Run**  
**SPECfp\_rate\_base2006 = 4660**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

**Test date:** Nov-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

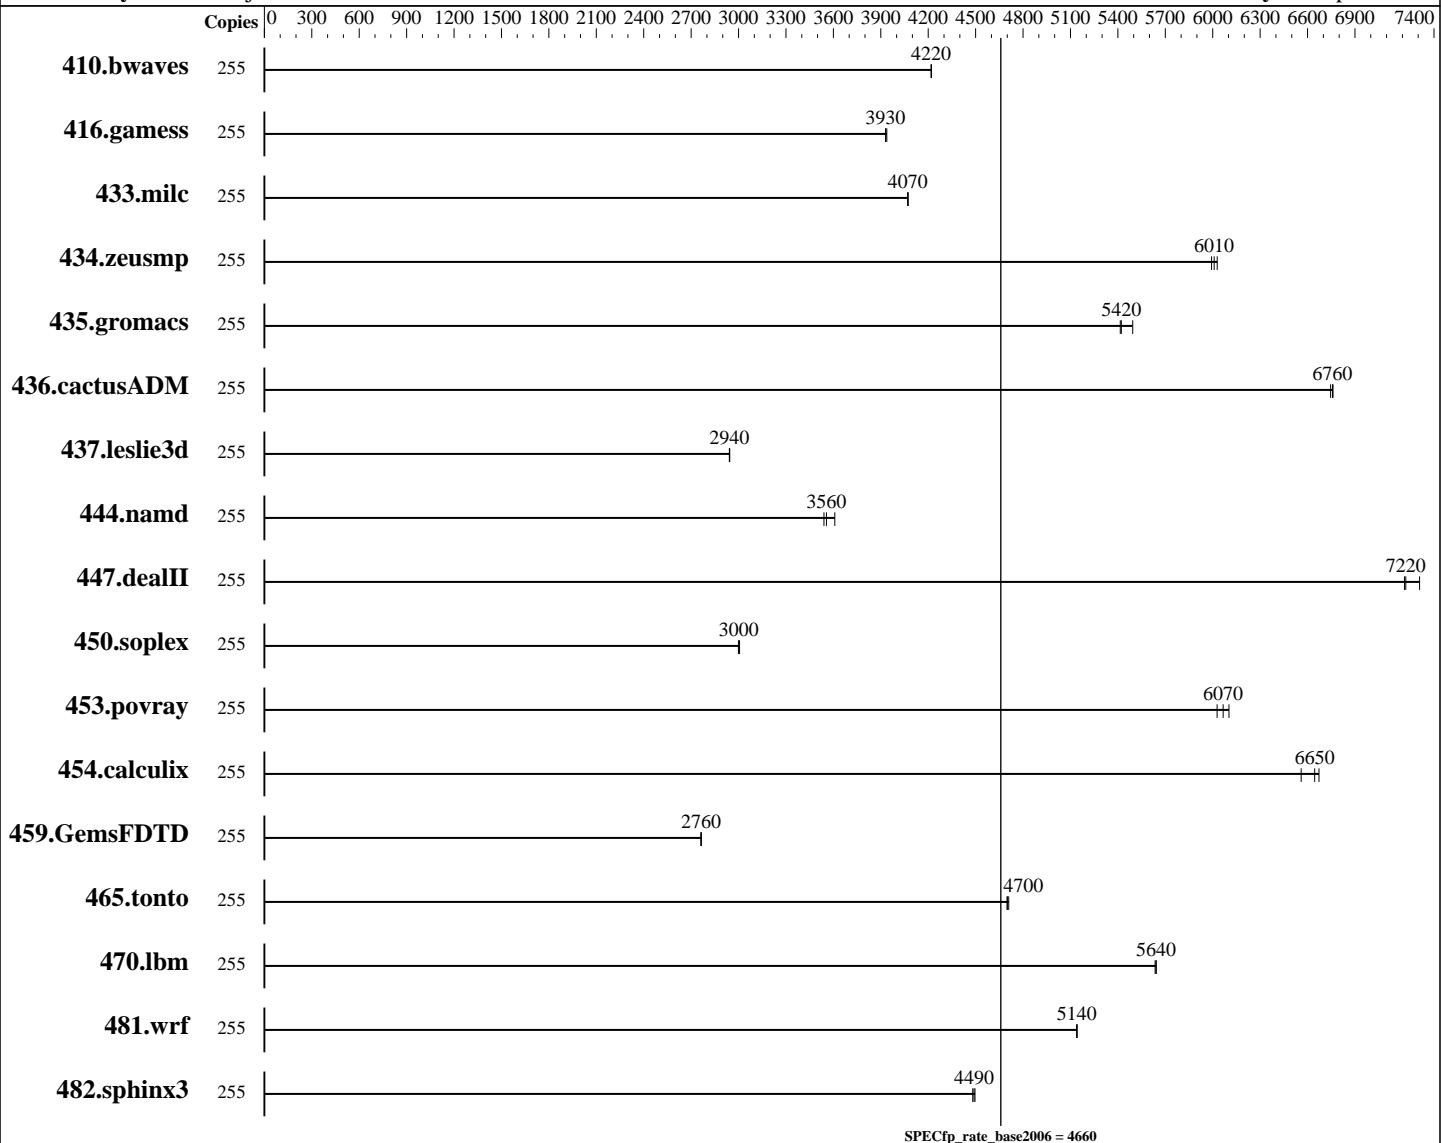

## Hardware

CPU Name: Intel Xeon Platinum 8153  
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 128 cores, 8 chips, 16 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4,6,8 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Auto Parallel: No  
File System: tmpfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8153,  
2.00GHz

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 4660**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

L3 Cache: 22 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1536 GB (96 x 16 GB 2Rx4 PC4-2666V-R)  
 Disk Subsystem: 768 GB tmpfs  
 Other Hardware: 1 x SAS HDD, 600 GB, 10.5K RPM, used for swap

Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	255	<b><u>821</u></b>	<b><u>4220</u></b>	821	4220	821	4220							
416.gamess	255	1268	3940	<b><u>1270</u></b>	<b><u>3930</u></b>	1270	3930							
433.milc	255	<b><u>575</u></b>	<b><u>4070</u></b>	575	4070	575	4070							
434.zeusmp	255	385	6030	<b><u>386</u></b>	<b><u>6010</u></b>	387	5990							
435.gromacs	255	<b><u>336</u></b>	<b><u>5420</u></b>	336	5420	331	5490							
436.cactusADM	255	451	6760	452	6750	<b><u>451</u></b>	<b><u>6760</u></b>							
437.leslie3d	255	815	2940	<b><u>814</u></b>	<b><u>2940</u></b>	814	2940							
444.namd	255	578	3540	567	3610	<b><u>575</u></b>	<b><u>3560</u></b>							
447.dealII	255	404	7210	399	7310	<b><u>404</u></b>	<b><u>7220</u></b>							
450.soplex	255	<b><u>708</u></b>	<b><u>3000</u></b>	709	3000	707	3010							
453.povray	255	<b><u>224</u></b>	<b><u>6070</u></b>	225	6030	222	6100							
454.calculix	255	315	6670	321	6560	<b><u>317</u></b>	<b><u>6650</u></b>							
459.GemsFDTD	255	979	2760	<b><u>979</u></b>	<b><u>2760</u></b>	979	2760							
465.tonto	255	<b><u>534</u></b>	<b><u>4700</u></b>	533	4710	534	4700							
470.lbm	255	<b><u>621</u></b>	<b><u>5640</u></b>	621	5640	622	5640							
481.wrf	255	<b><u>554</u></b>	<b><u>5140</u></b>	554	5140	554	5140							
482.sphinx3	255	1105	4500	<b><u>1107</u></b>	<b><u>4490</u></b>	1109	4480							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter : nohz_full=1-255 isolcpus=1-255
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Set tmpfs filesystem with:
mkdir /home/memory
mount -t tmpfs -o size=768g,rw tmpfs /home/memory
Process tuning settings:
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8153,  
2.00GHz

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 4660

CPU2006 license: 19

Test date: Nov-2017

Test sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Sep-2017

## Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
echo always > /sys/kernel/mm/transparent_hugepage/enabled
cpu idle state set with:
cpupower idle-set -d 2
cpupower idle-set -d 3
set affinity of rcu threads to the cpu0:
for i in `pgrep rcu` ; do taskset -pc 0 $i ; done
```

## Platform Notes

BIOS configuration:

Intel Virtualization Technology = Disabled  
HWPM Support = Disabled  
DCU Streamer Prefetcher = Disabled  
Stale AtoS = Enabled  
LLC dead line alloc = Disabled  
Sub NUMA Clustering = Enabled  
Fan Control = Full  
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-k55j Wed Nov 8 14:52:58 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
        8 "physical id"s (chips)
        256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 4: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 5: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 6: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 7: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 22528 KB
```

```
From /proc/meminfo
MemTotal:      1583837096 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8153,  
2.00GHz

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 4660

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-k55j 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 8 06:03
```

```
SPEC is set to: /home/memory/speccpu
Filesystem      Type   Size  Used Avail Use% Mounted on
tmpfs          tmpfs  768G  9.7G  759G   2% /home/memory
```

Additional information from dmidecode:

```
Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.
```

BIOS FUJITSU V1.0.0.0 R1.21.0 for D3858-A1x

09/15/2017

Memory:

```
45x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666 MHz
51x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/memory/speccpu/icc2018lib/ia32:/home/memory/speccpu/icc2018lib/intel64"

LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/memory/speccpu/sh10.2"

Binaries compiled on a system with 2x Intel Xeon Platinum 8180 CPU + 384GB RAM  
memory using SUSE Linux Enterprise Server 12 SP2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8153,  
2.00GHz

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 4660**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

## General Notes (Continued)

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        450.soplex: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
        465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8153,  
2.00GHz

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 4660**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 27 12:06:13 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 December 2017.