



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10  
(2.30 GHz, Intel Xeon Gold 6140M)

SPECfp<sup>®</sup>\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 2630

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

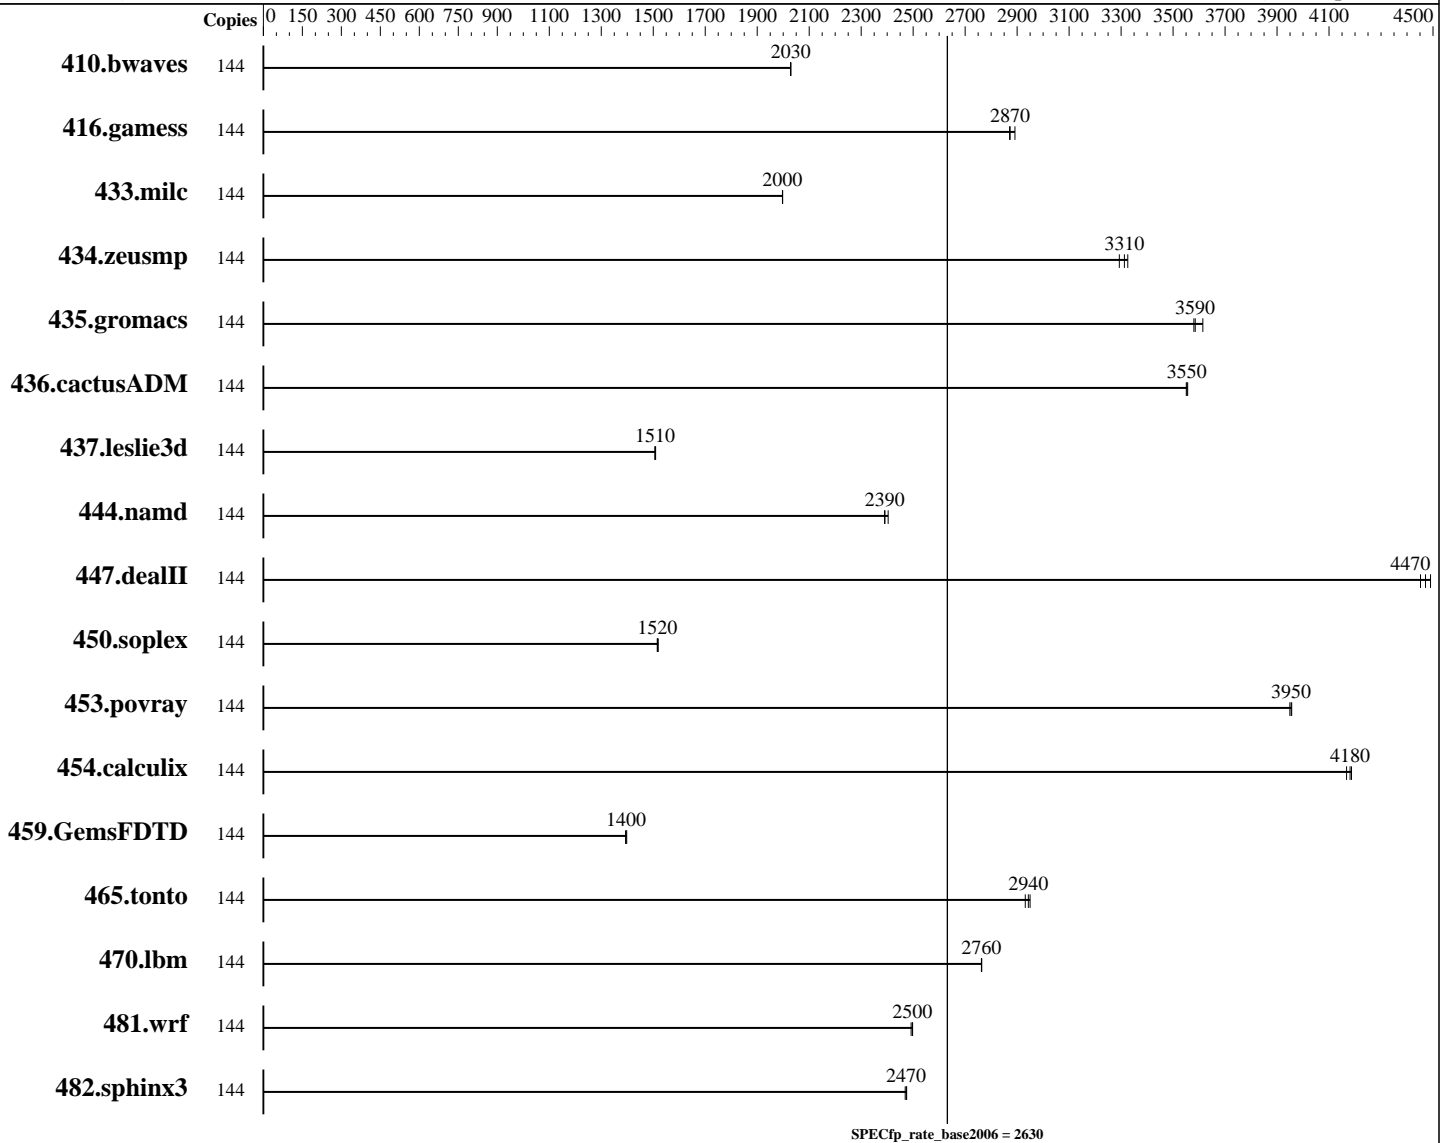

## Hardware

CPU Name: Intel Xeon Gold 6140M  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2, 4 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.73-5-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(2.30 GHz, Intel Xeon Gold 6140M)

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 2630

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

L3 Cache: 24.75 MB I+D on chip per chip  
Other Cache: None  
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: Not Applicable  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	144	964	2030	965	2030	<b>964</b>	<b>2030</b>							
416.gamess	144	982	2870	<b>981</b>	<b>2870</b>	975	2890							
433.milc	144	662	2000	662	2000	<b>662</b>	<b>2000</b>							
434.zeusmp	144	<b>396</b>	<b>3310</b>	398	3290	394	3330							
435.gromacs	144	284	3610	287	3580	<b>287</b>	<b>3590</b>							
436.cactusADM	144	484	3560	<b>484</b>	<b>3550</b>	485	3550							
437.leslie3d	144	<b>898</b>	<b>1510</b>	897	1510	899	1510							
444.namd	144	480	2400	483	2390	<b>483</b>	<b>2390</b>							
447.dealII	144	367	4490	370	4450	<b>368</b>	<b>4470</b>							
450.soplex	144	792	1520	<b>792</b>	<b>1520</b>	790	1520							
453.povray	144	194	3960	<b>194</b>	<b>3950</b>	194	3950							
454.calculix	144	284	4190	<b>284</b>	<b>4180</b>	285	4170							
459.GemsFDTD	144	1093	1400	1096	1390	<b>1095</b>	<b>1400</b>							
465.tonto	144	480	2950	483	2930	<b>481</b>	<b>2940</b>							
470.lbm	144	716	2760	716	2760	<b>716</b>	<b>2760</b>							
481.wrf	144	644	2500	<b>644</b>	<b>2500</b>	645	2490							
482.sphinx3	144	<b>1135</b>	<b>2470</b>	1137	2470	1134	2480							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
irqbalance disabled with "service irqbalance stop"  
tuned profile set with "tuned-adm profile throughput-performance"  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10  
(2.30 GHz, Intel Xeon Gold 6140M)

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 2630

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Operating System Notes (Continued)

VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"  
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

## Platform Notes

### BIOS Configuration:

Thermal Configuration set to Maximum Cooling  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Stale A to S set to Enabled  
Memory Patrol Scrubbing set to Disabled  
Workload Profile set to General Throughput Compute  
Minimum Processor Idle Power Core C-State set to C1E State  
Sysinfo program /home/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-irgu Fri Sep 29 06:47:39 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6140M CPU @ 2.30GHz
 4 "physical id"s (chips)
 144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 18
  siblings  : 36
  physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 25344 KB
```

### From /proc/meminfo

```
MemTotal:      792273828 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

### /usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 12 SP3
```

### From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or
release.
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10  
(2.30 GHz, Intel Xeon Gold 6140M)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 2630**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

```
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-irgu 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017
(b7ce4e4) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 29 01:24

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   331G   72G  259G  22% /home
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 08/18/2017
Memory:
48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10  
(2.30 GHz, Intel Xeon Gold 6140M)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 2630**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**  
(2.30 GHz, Intel Xeon Gold 6140M)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 2630**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 16 12:09:41 2018 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 January 2018.