




# SPEC® CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2560 M4, Intel Xeon Platinum 8176M,  
2.10GHz

**SPECfp®\_rate2006 = Not Run**  
**SPECfp\_rate\_base2006 = 1660**

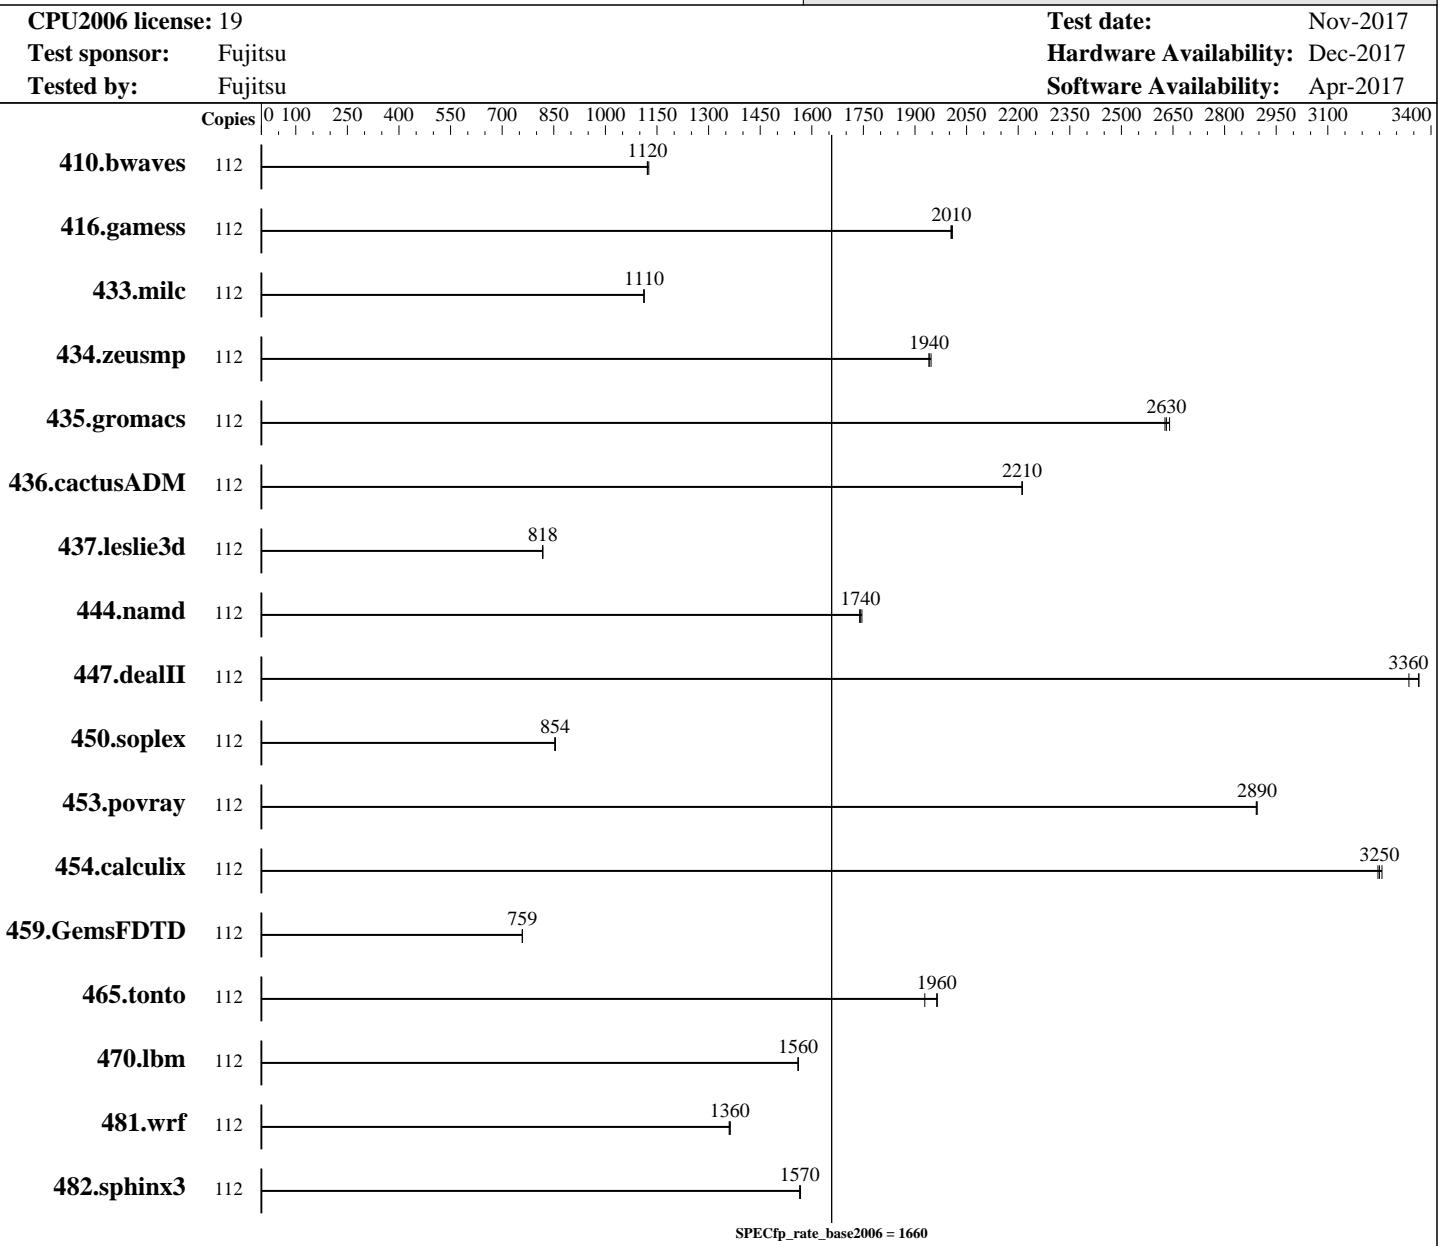

### Hardware

CPU Name: Intel Xeon Platinum 8176M  
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: No  
File System: tmpfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2560 M4, Intel Xeon Platinum 8176M, 2.10GHz

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1660**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (12 x 16 GB 2Rx4 PC4-2666V-R)  
 Disk Subsystem: 192 GB tmpfs  
 Other Hardware: 1 x SATA M.2 SSD, 128 GB, used for swap

Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	1352	1130	<u>1356</u>	<u>1120</u>	1357	1120									
416.gamess	112	1094	2000	1092	2010	<u>1093</u>	<u>2010</u>									
433.milc	112	925	1110	<u>924</u>	<u>1110</u>	924	1110									
434.zeusmp	112	524	1950	525	1940	<u>525</u>	<u>1940</u>									
435.gromacs	112	304	2630	303	2640	<u>304</u>	<u>2630</u>									
436.cactusADM	112	<u>605</u>	<u>2210</u>	605	2210	605	2210									
437.leslie3d	112	1287	818	<u>1287</u>	<u>818</u>	1288	817									
444.namd	112	<u>516</u>	<u>1740</u>	515	1750	517	1740									
447.dealII	112	384	3340	381	3370	<u>381</u>	<u>3360</u>									
450.soplex	112	1095	853	<u>1093</u>	<u>854</u>	1093	855									
453.povray	112	206	2890	<u>206</u>	<u>2890</u>	206	2890									
454.calculix	112	284	3260	<u>284</u>	<u>3250</u>	285	3250									
459.GemsFDTD	112	1566	759	1567	759	<u>1566</u>	<u>759</u>									
465.tonto	112	561	1970	571	1930	<u>561</u>	<u>1960</u>									
470.lbm	112	986	1560	<u>986</u>	<u>1560</u>	986	1560									
481.wrf	112	920	1360	918	1360	<u>919</u>	<u>1360</u>									
482.sphinx3	112	<u>1394</u>	<u>1570</u>	1395	1560	1393	1570									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Set Kernel Boot Parameter: nohz\_full=1-111  
 Set CPU frequency governor to maximum performance with:  
 cpupower -c all frequency-set -g performance  
 Set tmpfs filesystem with:  
 mkdir /home/memory  
 mount -t tmpfs -o size=192g,rw tmpfs /home/memory  
 Process tuning settings:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M4, Intel Xeon Platinum 8176M,  
2.10GHz

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1660

CPU2006 license: 19

Test date: Nov-2017

Test sponsor: Fujitsu

Hardware Availability: Dec-2017

Tested by: Fujitsu

Software Availability: Apr-2017

## Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
echo never > /sys/kernel/mm/transparent_hugepage/enabled
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

## Platform Notes

```
BIOS configuration:
DCU Streamer Prefetcher = Disabled
Intel Virtualization Technology = Disabled
Power Technology = Custom
HWPM Support = Disabled
UPI Link Frequency Select = 10.4GT/s
Sub NUMA Clustering = Enabled
Stale AtoS = Enabled
LLC dead line alloc = Disabled
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-CX2560M4 Fri Nov 10 22:52:55 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8176M CPU @ 2.10GHz
        2 "physical id"s (chips)
        112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 28
        siblings : 56
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
        25 26 27 28 29 30
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
        25 26 27 28 29 30
        cache size : 39424 KB
```

```
From /proc/meminfo
MemTotal:           196468548 kB
HugePages_Total:      0
Hugepagesize:        2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M4, Intel Xeon Platinum 8176M,  
2.10GHz

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1660

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2017

Hardware Availability: Dec-2017

Software Availability: Apr-2017

## Platform Notes (Continued)

```
SuSE-release:  
  SUSE Linux Enterprise Server 12 (x86_64)  
  VERSION = 12  
  PATCHLEVEL = 2  
  # This file is deprecated and will be removed in a future service pack or  
  release.  
  # Please check /etc/os-release for details about this release.  
os-release:  
  NAME="SLES"  
  VERSION="12-SP2"  
  VERSION_ID="12.2"  
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"  
  ID="sles"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:12:sp2"  
  
uname -a:  
  Linux linux-CX2560M4 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016  
  (9464f67) x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Nov 10 21:39  
  
SPEC is set to: /home/memory/speccpu  
  Filesystem      Type  Size  Used Avail Use% Mounted on  
  tmpfs          tmpfs  192G   9.7G  183G   6% /home/memory  
Additional information from dmidecode:  
  
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.  
  
BIOS FUJITSU V1.0.0.0 R1.9.6 for D3854-A1x          10/06/2017  
Memory:  
  12x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666 MHz  
  4x Not Specified Not Specified  
  
(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64:/home/memory/speccpu/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY CX2560 M4, Intel Xeon Platinum 8176M,  
2.10GHz

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1660**

**CPU2006 license:** 19

**Test date:** Nov-2017

**Test sponsor:** Fujitsu

**Hardware Availability:** Dec-2017

**Tested by:** Fujitsu

**Software Availability:** Apr-2017

## General Notes (Continued)

numactl --interleave=all runspec <etc>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

Fortran benchmarks:

    ifort -m64

Benchmarks using both Fortran and C:

    icc -m64 ifort -m64

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

    -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
    -qopt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M4, Intel Xeon Platinum 8176M,  
2.10GHz

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1660**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Apr-2017

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Feb 22 11:37:12 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 February 2018.