



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2560 M2, Intel Xeon E5-2699A v4, 2.40GHz

SPECrate2017\_int\_base = 164

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2016

Hardware Availability: Oct-2016

Software Availability: Nov-2016

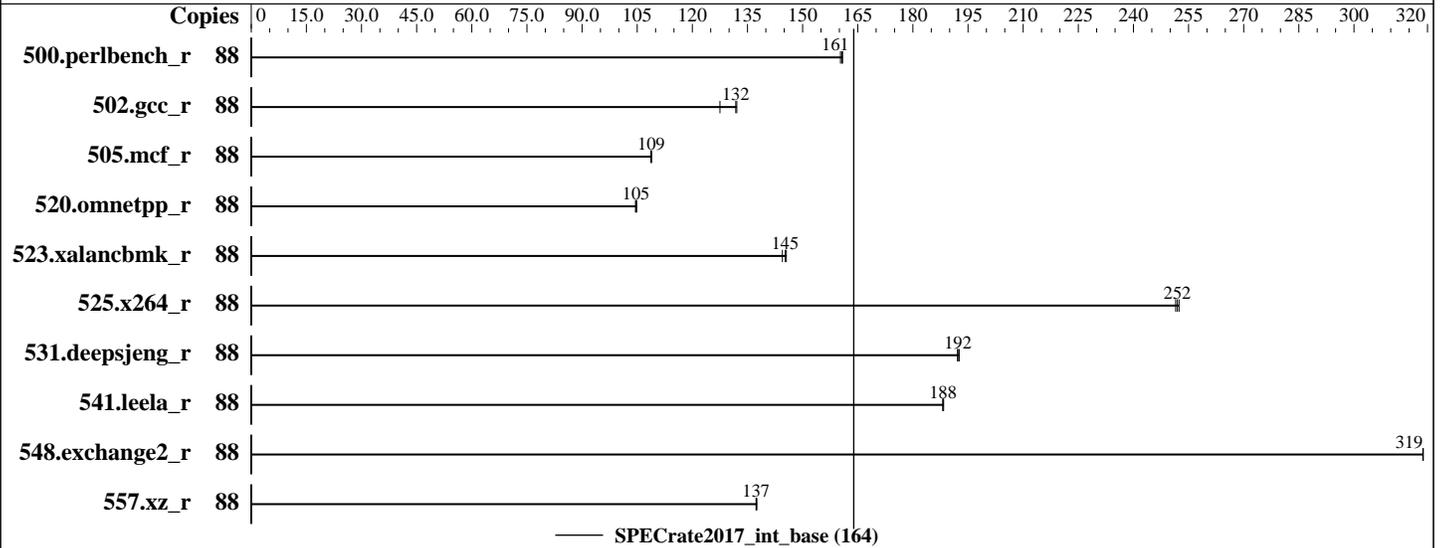

### Hardware

CPU Name: Intel Xeon E5-2699A v4  
 Max MHz.: 3600  
 Nominal: 2400  
 Enabled: 44 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 55 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
 Storage: 1 x 960GB, SAS3, SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 RC2 4.4.19-60-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Fujitsu R1.7.0  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other: Microquill SmartHeap V10.2



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2560 M2, Intel Xeon E5-2699A v4, 2.40GHz

SPECrate2017\_int\_base = 164

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Dec-2016  
Hardware Availability: Oct-2016  
Software Availability: Nov-2016

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	88	<b>872</b>	<b>161</b>	874	160	871	161									
502.gcc_r	88	977	128	943	132	<b>945</b>	<b>132</b>									
505.mcf_r	88	1308	109	1305	109	<b>1307</b>	<b>109</b>									
520.omnetpp_r	88	<b>1103</b>	<b>105</b>	1105	105	1101	105									
523.xalancbmk_r	88	643	145	638	146	<b>640</b>	<b>145</b>									
525.x264_r	88	610	252	<b>612</b>	<b>252</b>	613	251									
531.deepsjeng_r	88	525	192	524	193	<b>525</b>	<b>192</b>									
541.leela_r	88	<b>774</b>	<b>188</b>	775	188	774	188									
548.exchange2_r	88	<b>723</b>	<b>319</b>	723	319	723	319									
557.xz_r	88	692	137	691	138	<b>692</b>	<b>137</b>									

SPECrate2017\_int\_base = 164

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/spec/cpu2017/lib/ia32:/home/spec/cpu2017/lib/intel64:/home/spec/cpu2017/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

## Platform Notes

BIOS configuration:

Energy Performance = Performance

Utilization Profile = Unbalanced

QPI snoop mode: Cluster on Die

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2560 M2, Intel Xeon E5-2699A v4, 2.40GHz

SPECrate2017\_int\_base = 164

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2016  
**Hardware Availability:** Oct-2016  
**Software Availability:** Nov-2016

### Platform Notes (Continued)

COD Enable = Enabled, Early Snoop = Disabled, Home Snoop Dir OSB = Disabled  
CPU C1E Support = Disabled  
Sysinfo program /home/spec/cpu2017/Docs/sysinfo  
Rev: r5007 of 2016-11-15 fc8dc82f217779bedfed4d694d580ba9  
running on linux-tw9h Sun Dec 11 17:26:03 2016

This section contains SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<http://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2699A v4 @ 2.40GHz
 2 "physical id"s (chips)
 88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores      : 22
siblings       : 44
physical 0:    cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
                28
physical 1:    cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
                28
cache size     : 28160 KB
```

The view from numactl --hardware follows. WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 44 45 46 47 48 49 50 51 52 53 54
node 0 size: 64200 MB
node 0 free: 63861 MB
node 1 cpus: 11 12 13 14 15 16 17 18 19 20 21 55 56 57 58 59 60 61 62 63 64 65
node 1 size: 64508 MB
node 1 free: 64225 MB
node 2 cpus: 22 23 24 25 26 27 28 29 30 31 32 66 67 68 69 70 71 72 73 74 75 76
node 2 size: 64508 MB
node 2 free: 64224 MB
node 3 cpus: 33 34 35 36 37 38 39 40 41 42 43 77 78 79 80 81 82 83 84 85 86 87
node 3 size: 64384 MB
node 3 free: 64102 MB
node distances:
node  0  1  2  3
 0:  10  11  21  21
 1:  11  10  21  21
 2:  21  21  10  11
 3:  21  21  11  10
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2560 M2, Intel Xeon E5-2699A v4, 2.40GHz

SPECrate2017\_int\_base = 164

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2016  
**Hardware Availability:** Oct-2016  
**Software Availability:** Nov-2016

### Platform Notes (Continued)

```

From /proc/meminfo
MemTotal:          263784808 kB
HugePages_Total:   0
Hugepagesize:      2048 kB

/usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or
    # release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
    Linux linux-tw9h 4.4.19-60-default #1 SMP Fri Aug 26 12:54:34 UTC 2016
    (a3a3ea6) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 10 17:42

SPEC is set to: /home/spec/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   852G   30G  823G   4% /home

Additional information from dmidecode follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is
"intended to allow hardware to be accurately determined", but the intent may not
be met, as there are frequent changes to hardware, firmware, and the "DMTF
SMBIOS" standard.
BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.7.0 for D3289-B1x
04/21/2016
Memory:
    8x NO DIMM NO DIMM
    16x Samsung M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2560 M2, Intel Xeon E5-2699A v4,  
2.40GHz

SPECrate2017\_int\_base = 164

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2016  
**Hardware Availability:** Oct-2016  
**Software Availability:** Nov-2016

## Platform Notes (Continued)

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base)  
557.xz\_r(base)

-----  
icc (ICC) 17.0.0 20160721  
Copyright (C) 1985-2016 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

-----  
icpc (ICC) 17.0.0 20160721  
Copyright (C) 1985-2016 Intel Corporation. All rights reserved.

=====  
FC 548.exchange2\_r(base)

-----  
ifort (IFORT) 17.0.0 20160721  
Copyright (C) 1985-2016 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2560 M2, Intel Xeon E5-2699A v4, 2.40GHz

SPECrate2017\_int\_base = 164

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2016

Hardware Availability: Oct-2016

Software Availability: Nov-2016

## Base Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-p32 -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-p32
-qopt-prefetch -qopt-mem-layout-trans=3 -L/sh10.2 -lsmartheap64
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic17.0-official-linux64-revD.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic17.0-official-linux64-revD.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v0.904.0 on 2016-12-11 03:26:03-0500.

Report generated on 2018-10-31 12:41:17 by CPU2017 PDF formatter v6067.

Originally published on 2017-06-19.