



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS WS C621E SAGE Server System  
(3.00 GHz, Intel Xeon Gold 6154)

**SPECSspeed2017\_int\_base = 9.20**

**SPECSspeed2017\_int\_peak = 9.41**

CPU2017 License: 9016


Test Date: Jan-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2017

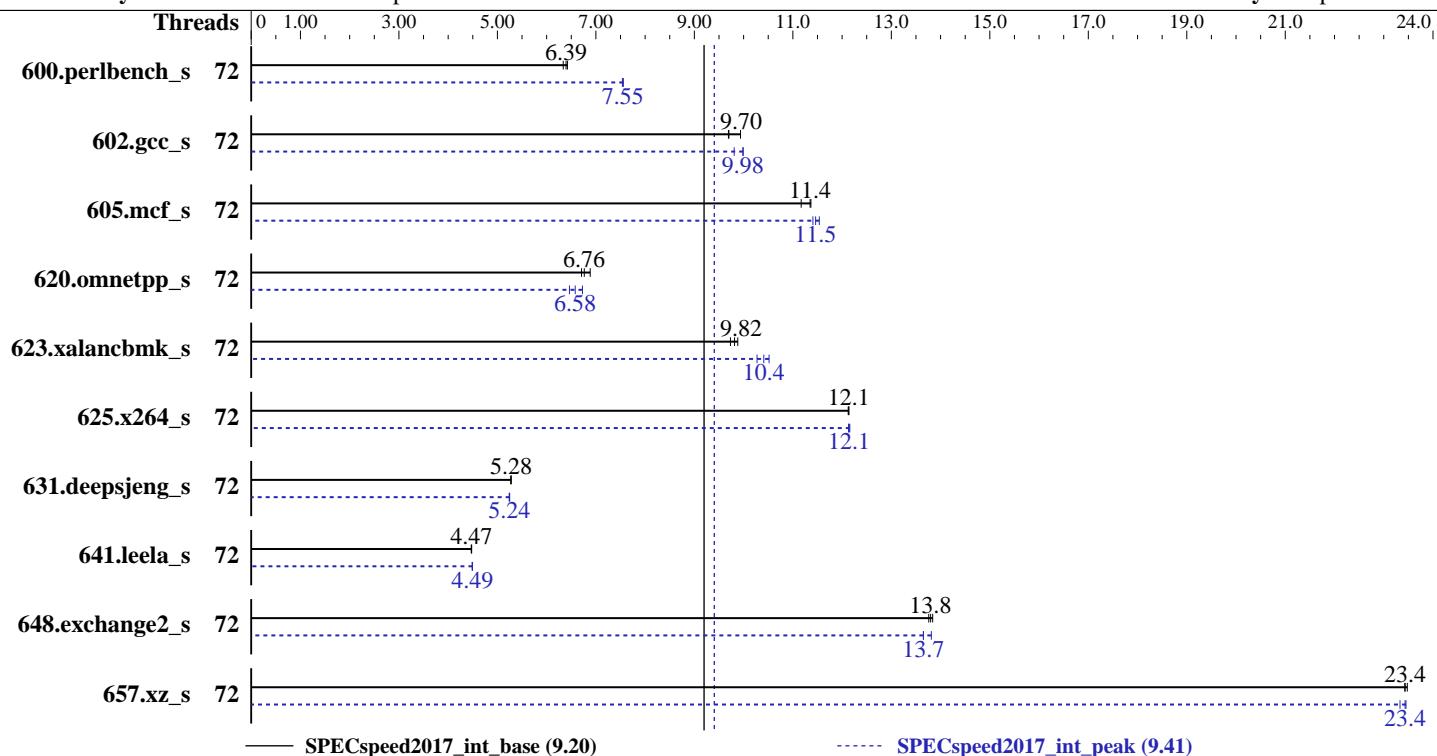

Hardware		Software	
CPU Name:	Intel Xeon Gold 6154	OS:	SUSE Linux Enterprise Server 12 (x86_64) SP2
Max MHz.:	3700		Kernel 4.4.21-69-default
Nominal:	3000	Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Enabled:	36 cores, 2 chips		Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Orderable:	1, 2 chip(s)	Parallel:	Yes
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 0401 released Oct-2017
L2:	1 MB I+D on chip per core	File System:	btrfs
L3:	24.75 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)	Peak Pointers:	32/64-bit
Storage:	1 x 240 GB SATA SSD	Other:	jemalloc: jemalloc memory allocator library V5.0.1
Other:	None		



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS WS C621E SAGE Server System  
(3.00 GHz, Intel Xeon Gold 6154)

**SPECspeed2017\_int\_base = 9.20**

**SPECspeed2017\_int\_peak = 9.41**

CPU2017 License: 9016

Test Date: Jan-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2017

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	72	276	6.42	<b>278</b>	<b>6.39</b>	280	6.34	72	<b>235</b>	<b>7.55</b>	235	7.56	235	7.54		
602.gcc_s	72	401	9.94	411	9.69	<b>410</b>	<b>9.70</b>	72	406	9.81	399	9.99	<b>399</b>	<b>9.98</b>		
605.mcf_s	72	423	11.2	415	11.4	<b>416</b>	<b>11.4</b>	72	<b>412</b>	<b>11.5</b>	409	11.5	414	11.4		
620.omnetpp_s	72	<b>241</b>	<b>6.76</b>	237	6.88	243	6.71	72	<b>248</b>	<b>6.58</b>	252	6.46	242	6.73		
623.xalancbmk_s	72	<b>144</b>	<b>9.82</b>	143	9.88	146	9.73	72	135	10.5	<b>136</b>	<b>10.4</b>	138	10.3		
625.x264_s	72	<b>145</b>	<b>12.1</b>	145	12.1	145	12.1	72	145	12.2	145	12.1	<b>145</b>	<b>12.1</b>		
631.deepsjeng_s	72	272	5.28	272	5.28	<b>272</b>	<b>5.28</b>	72	273	5.24	<b>273</b>	<b>5.24</b>	273	5.25		
641.leela_s	72	382	4.47	381	4.48	<b>381</b>	<b>4.47</b>	72	380	4.49	380	4.49	<b>380</b>	<b>4.49</b>		
648.exchange2_s	72	<b>213</b>	<b>13.8</b>	212	13.8	214	13.8	72	215	13.7	213	13.8	<b>215</b>	<b>13.7</b>		
657.xz_s	72	<b>264</b>	<b>23.4</b>	263	23.5	264	23.4	72	<b>264</b>	<b>23.4</b>	265	23.3	264	23.5		
<b>SPECspeed2017_int_base = 9.20</b>																
<b>SPECspeed2017_int_peak = 9.41</b>																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

jemalloc: configured and built at default for  
32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,  
and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS WS C621E SAGE Server System  
(3.00 GHz, Intel Xeon Gold 6154)

**SPECspeed2017\_int\_base = 9.20**

**SPECspeed2017\_int\_peak = 9.41**

**CPU2017 License:** 9016

**Test Date:** Jan-2018

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Sep-2017

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Sep-2017

## General Notes (Continued)

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

BIOS Configuration:

SNC = Disabled

IMC interleaving = AUTO

Patrol Scrub = Disabled

VT-d = Disabled

HyperThreading = Disabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-pmm5 Fri Jan 19 11:32:13 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz

2 "physical id"s (chips)

36 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 18

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS WS C621E SAGE Server System  
(3.00 GHz, Intel Xeon Gold 6154)

SPECspeed2017\_int\_base = 9.20

SPECspeed2017\_int\_peak = 9.41

CPU2017 License: 9016

Test Date: Jan-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

CPU(s): 36  
On-line CPU(s) list: 0-35  
Thread(s) per core: 1  
Core(s) per socket: 18  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz  
Stepping: 4  
CPU MHz: 3089.964  
BogoMIPS: 6179.92  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 25344K  
NUMA node0 CPU(s): 0-17  
NUMA node1 CPU(s): 18-35  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch ida arat epb pln pts dtherm hwp\_epp intel\_pt tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavewc xgetbv1 cqmq\_llc cqmq\_occup\_llc

/proc/cpuinfo cache data  
cache size : 25344 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17  
node 0 size: 192045 MB  
node 0 free: 191328 MB  
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35  
node 1 size: 193504 MB  
node 1 free: 192837 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS WS C621E SAGE Server System  
(3.00 GHz, Intel Xeon Gold 6154)

SPECspeed2017\_int\_base = 9.20

SPECspeed2017\_int\_peak = 9.41

CPU2017 License: 9016

Test Date: Jan-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      394803104 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.

os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-pmm5 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 19 11:31

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	203G	140G	63G	70%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0401 10/18/2017

Memory:

```
12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
peak) 657.xz_s(base)
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS WS C621E SAGE Server System  
(3.00 GHz, Intel Xeon Gold 6154)

**SPECspeed2017\_int\_base = 9.20**

**SPECspeed2017\_int\_peak = 9.41**

CPU2017 License: 9016

Test Date: Jan-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

=====  
icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CC 600.perlbench\_s(peak) 602.gcc\_s(peak) 605.mcf\_s(peak) 657.xz\_s(peak)  
=====

=====  
icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)  
=====

=====  
icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CXXC 620.omnetpp\_s(peak) 623.xalancbmk\_s(peak) 631.deepsjeng\_s(peak)  
641.leela\_s(peak)  
=====

=====  
icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
FC 648.exchange2\_s(base, peak)  
=====

=====  
ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS WS C621E SAGE Server System  
(3.00 GHz, Intel Xeon Gold 6154)

**SPECspeed2017\_int\_base = 9.20**

**SPECspeed2017\_int\_peak = 9.41**

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

623.xalancbmk\_s: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32

Fortran benchmarks:

```
ifort -m64
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS WS C621E SAGE Server System  
(3.00 GHz, Intel Xeon Gold 6154)

**SPECspeed2017\_int\_base = 9.20**

**SPECspeed2017\_int\_peak = 9.41**

CPU2017 License: 9016

Test Date: Jan-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2017

## Peak Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3  
-no-prec-div -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3  
-no-prec-div -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

625.x264\_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

620.omnetpp\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS WS C621E SAGE Server System  
(3.00 GHz, Intel Xeon Gold 6154)

SPECspeed2017\_int\_base = 9.20

SPECspeed2017\_int\_peak = 9.41

CPU2017 License: 9016

Test Date: Jan-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

623.xalancbmk\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-32/lib -ljemalloc

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-01-18 22:32:13-0500.

Report generated on 2018-10-31 16:17:34 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-27.