



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

Huawei XH628 V5 (Intel Xeon Platinum 8160)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei


SPECrate2017\_int\_base = 220

SPECrate2017\_int\_peak = 235

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Mar-2018

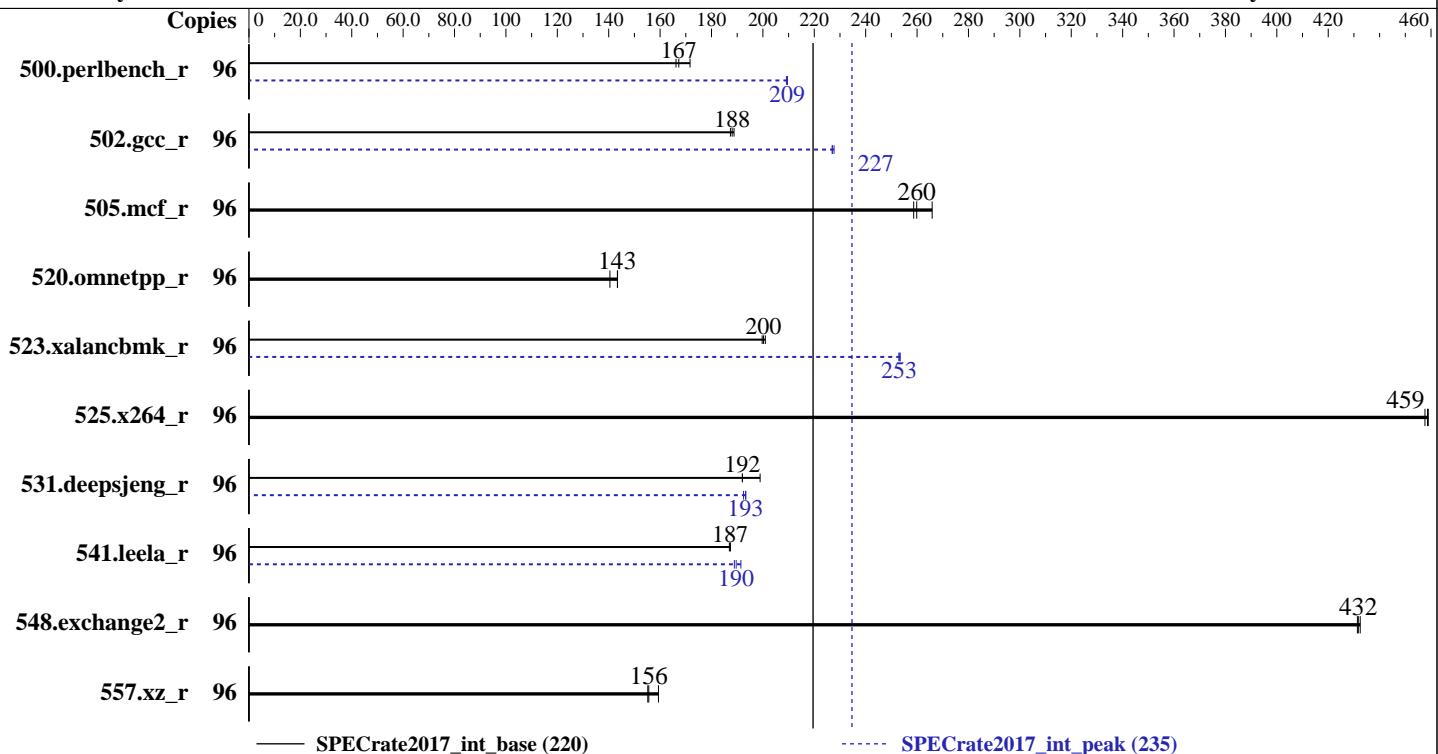

— SPECrate2017\_int\_base (220)

— SPECrate2017\_int\_peak (235)

## Hardware

CPU Name: Intel Xeon Platinum 8160  
Max MHz.: 3700  
Nominal: 2100  
Enabled: 48 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 33 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
Storage: 1 x 1800 GB SAS, 10000 RPM  
Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
Compiler: 3.10.0-693.11.6.el7.x86\_64  
C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Version 0.86 Released Aug-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 220

SPECrate2017\_int\_peak = 235

CPU2017 License: 3175

Test Date: Aug-2018

Test Sponsor: Huawei

Hardware Availability: Aug-2018

Tested by: Huawei

Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	890	172	920	166	<b>914</b>	<b>167</b>	96	<b>730</b>	<b>209</b>	731	209	729	210
502.gcc_r	96	<b>723</b>	<b>188</b>	720	189	726	187	96	599	227	597	228	<b>599</b>	<b>227</b>
505.mcf_r	96	583	266	600	259	<b>597</b>	<b>260</b>	96	583	266	600	259	<b>597</b>	<b>260</b>
520.omnetpp_r	96	<b>879</b>	<b>143</b>	878	143	897	140	96	<b>879</b>	<b>143</b>	878	143	897	140
523.xalancbmk_r	96	<b>506</b>	<b>200</b>	504	201	508	200	96	400	253	<b>401</b>	<b>253</b>	401	253
525.x264_r	96	367	458	366	459	<b>367</b>	<b>459</b>	96	367	458	366	459	<b>367</b>	<b>459</b>
531.deepsjeng_r	96	553	199	<b>573</b>	<b>192</b>	573	192	96	569	193	<b>569</b>	<b>193</b>	572	192
541.leela_r	96	848	187	<b>849</b>	<b>187</b>	850	187	96	842	189	<b>838</b>	<b>190</b>	830	191
548.exchange2_r	96	583	431	<b>583</b>	<b>432</b>	582	432	96	583	431	<b>583</b>	<b>432</b>	582	432
557.xz_r	96	651	159	<b>666</b>	<b>156</b>	668	155	96	651	159	<b>666</b>	<b>156</b>	668	155

SPECrate2017\_int\_base = 220

SPECrate2017\_int\_peak = 235

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 220

Huawei XH628 V5 (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 235

CPU2017 License: 3175

Test Date: Aug-2018

Test Sponsor: Huawei

Hardware Availability: Aug-2018

Tested by: Huawei

Software Availability: Mar-2018

## General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving Set to 1-way Interleave

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost.localdomain Tue Aug 28 09:54:36 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
  2 "physical id"s (chips)
  96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 24
  siblings : 48
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
Stepping:               4
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 220

Huawei XH628 V5 (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 235

CPU2017 License: 3175

Test Date: Aug-2018

Test Sponsor: Huawei

Hardware Availability: Aug-2018

Tested by: Huawei

Software Availability: Mar-2018

## Platform Notes (Continued)

CPU MHz: 2100.000  
BogoMIPS: 4200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 33792K  
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,48-50,54-56,60-62,66-68  
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,51-53,57-59,63-65,69-71  
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,72-74,78-80,84-86,90-92  
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,75-77,81-83,87-89,93-95  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pnipclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_13 cdp\_13 invpcid\_single intel\_pt spec\_ctrl ibpb\_support tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavexc xgetbv1 cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts

/proc/cpuinfo cache data  
cache size : 33792 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 48 49 50 54 55 56 60 61 62 66 67 68  
node 0 size: 96437 MB  
node 0 free: 93824 MB  
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 51 52 53 57 58 59 63 64 65 69 70 71  
node 1 size: 98304 MB  
node 1 free: 95181 MB  
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 72 73 74 78 79 80 84 85 86 90 91 92  
node 2 size: 98304 MB  
node 2 free: 95999 MB  
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 75 76 77 81 82 83 87 88 89 93 94 95  
node 3 size: 98304 MB  
node 3 free: 95955 MB  
node distances:  
node 0 1 2 3  
0: 10 11 21 21  
1: 11 10 21 21  
2: 21 21 10 11  
3: 21 21 11 10

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

Huawei XH628 V5 (Intel Xeon Platinum 8160)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

SPECrate2017\_int\_base = 220

SPECrate2017\_int\_peak = 235

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Mar-2018

## Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      394174376 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST
2017 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 28 09:47

SPEC is set to: /spec2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   553G  8.7G  544G   2%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.86 08/06/2018

Memory:

```
4x NO DIMM NO DIMM
12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
  557.xz_r(base)
=====
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

Huawei XH628 V5 (Intel Xeon Platinum 8160)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

SPECrate2017\_int\_base = 220

SPECrate2017\_int\_peak = 235

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 500.perlbench\_r(peak) 502.gcc\_r(peak) 505.mcf\_r(peak) 525.x264\_r(peak)  
557.xz\_r(peak)

=====

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

=====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CXXC 520.omnetpp\_r(peak) 523.xalancbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)

=====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 548.exchange2\_r(base)

=====

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 548.exchange2\_r(peak)

=====

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

Huawei XH628 V5 (Intel Xeon Platinum 8160)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

SPECrate2017\_int\_base = 220

SPECrate2017\_int\_peak = 235

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Mar-2018

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/jetson-tx2/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/jetson-tx2/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -fstandard-realloc-lhs  
-L/usr/local/jetson-tx2/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

Huawei XH628 V5 (Intel Xeon Platinum 8160)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

SPECrate2017\_int\_base = 220

SPECrate2017\_int\_peak = 235

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Mar-2018

## Peak Compiler Invocation (Continued)

502.gcc\_r: icc -m32 -std=c11 -L/home/prasad/j/specdev/IC18u2\_Internal/lin\_18\_0\_20180210/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m64

523.xalancbmk\_r: icpc -m32 -L/home/prasad/j/specdev/IC18u2\_Internal/lin\_18\_0\_20180210/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc

502.gcc\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: basepeak = yes

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

Huawei XH628 V5 (Intel Xeon Platinum 8160)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

SPECrate2017\_int\_base = 220

SPECrate2017\_int\_peak = 235

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Mar-2018

## Peak Optimization Flags (Continued)

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc

541.leela\_r: Same as 531.deepsjeng\_r

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>  
<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>  
<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-08-28 05:54:35-0400.

Report generated on 2019-01-22 16:43:00 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-22.