



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 225 RE1 (Intel Xeon Gold 5118, 2.30 GHz)

SPECrate2017_int_base = 118
SPECrate2017_int_peak = 124

CPU2017 License: 9081


Test Date: Jan-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

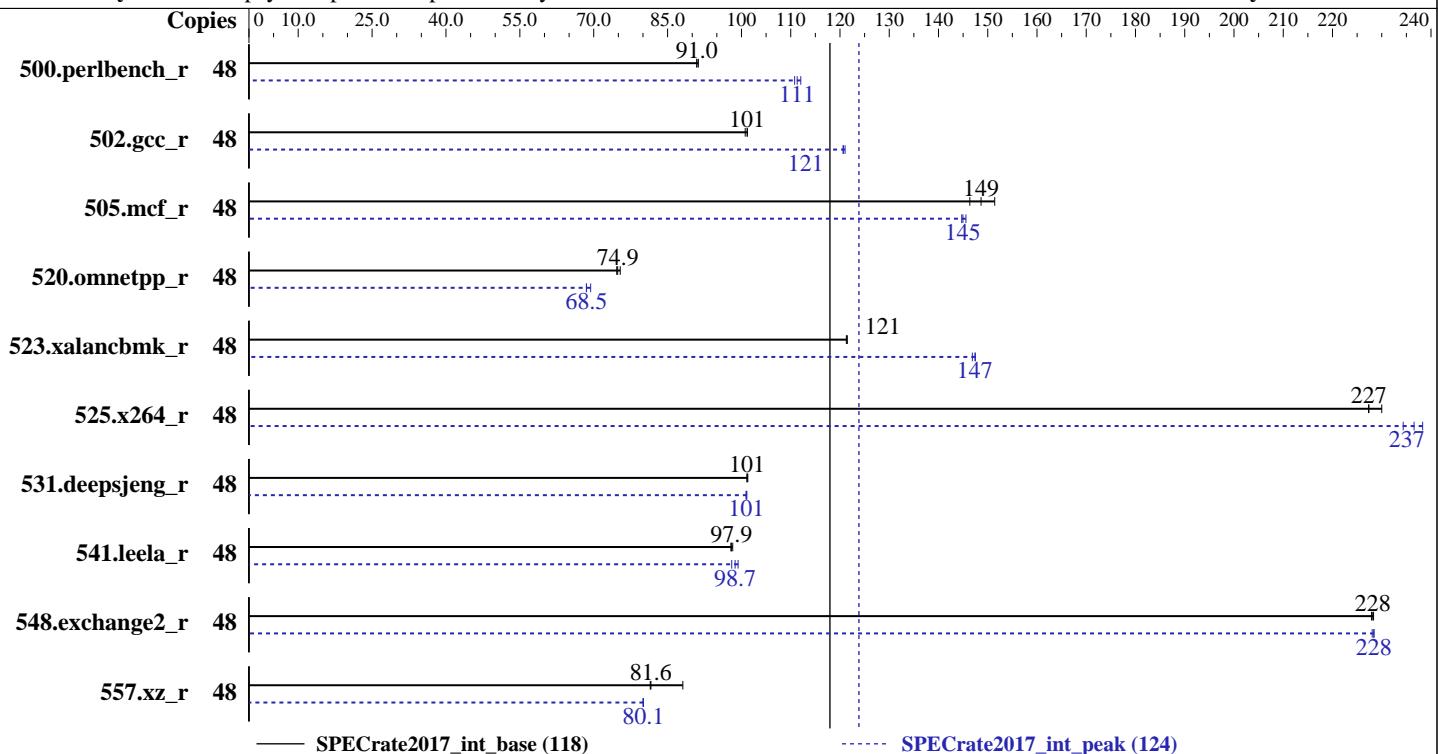

Hardware

CPU Name: Intel Xeon Gold 5118
Max MHz.: 3200
Nominal: 2300
Enabled: 24 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 16.5 MB I+D on chip per chip
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
Storage: 1 x 960 GB SSD SATA III
Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)
Compiler: 3.10.0-693.21.1.el7.x86_64
C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Version BIOS 2.2 released Nov-2018
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 225 RE1 (Intel Xeon Gold 5118, 2.30 GHz)

SPECrate2017_int_base = 118
SPECrate2017_int_peak = 124

CPU2017 License: 9081

Test Date: Jan-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|------------|-------------|------------|-------------|------------|-------------|--------|------------|-------------|------------|------------|------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 48 | 840 | 91.0 | 837 | 91.3 | 840 | 90.9 | 48 | 682 | 112 | 690 | 111 | 687 | 111 |
| 502.gcc_r | 48 | 672 | 101 | 675 | 101 | 672 | 101 | 48 | 562 | 121 | 563 | 121 | 563 | 121 |
| 505.mcf_r | 48 | 512 | 151 | 522 | 149 | 530 | 146 | 48 | 533 | 146 | 536 | 145 | 535 | 145 |
| 520.omnetpp_r | 48 | 835 | 75.4 | 843 | 74.7 | 841 | 74.9 | 48 | 908 | 69.4 | 919 | 68.5 | 919 | 68.5 |
| 523.xalancbmk_r | 48 | 418 | 121 | 417 | 121 | 417 | 121 | 48 | 344 | 147 | 345 | 147 | 344 | 147 |
| 525.x264_r | 48 | 370 | 227 | 370 | 227 | 365 | 230 | 48 | 359 | 234 | 355 | 237 | 353 | 238 |
| 531.deepsjeng_r | 48 | 543 | 101 | 544 | 101 | 544 | 101 | 48 | 545 | 101 | 544 | 101 | 545 | 101 |
| 541.leela_r | 48 | 812 | 97.9 | 809 | 98.2 | 812 | 97.9 | 48 | 805 | 98.7 | 800 | 99.3 | 811 | 98.0 |
| 548.exchange2_r | 48 | 552 | 228 | 551 | 228 | 551 | 228 | 48 | 551 | 228 | 551 | 228 | 551 | 228 |
| 557.xz_r | 48 | 588 | 88.1 | 635 | 81.6 | 636 | 81.5 | 48 | 647 | 80.1 | 647 | 80.1 | 648 | 80.0 |

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 124

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/cpu2017.1.0/lib/ia32:/cpu2017.1.0/lib/intel64:/cpu2017.1.0/je5.0.1-32:/cpu2017.1.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32 GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 225 RE1 (Intel Xeon Gold 5118, 2.30 GHz)

SPECrate2017_int_base = 118
SPECrate2017_int_peak = 124

CPU2017 License: 9081

Test Date: Jan-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

jemalloc:

configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
sources available via jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology = Custom

Turbo Mode = Enable

Enhanced Halt State (C1E) = Disable

CPU C6 report = Disabled

Package C State = No limit

Software Controlled T-States = Disable

Hyper-Threading (All) = Enable

Enforce POR = Disable

Memory Frequency = 2400

Patrol Scrub = Disabled

IMC Interleaving = Auto

SNC = Disabled

Sysinfo program /cpu2017.1.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on SUT Thu Jan 31 19:34:43 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 225 RE1 (Intel Xeon Gold 5118, 2.30 GHz)

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 124

CPU2017 License: 9081

Test Date: Jan-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

Platform Notes (Continued)

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 48
On-line CPU(s) list: 0-47
Thread(s) per core: 2
Core(s) per socket: 12
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz
Stepping: 4
CPU MHz: 2301.000
CPU max MHz: 2301.0000
CPU min MHz: 1000.0000
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0-11,24-35
NUMA node1 CPU(s): 12-23,36-47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts

/proc/cpuinfo cache data
cache size : 16896 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 24 25 26 27 28 29 30 31 32 33 34 35
node 0 size: 195242 MB
node 0 free: 190308 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 196608 MB

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 225 RE1 (Intel Xeon Gold 5118, 2.30 GHz)

SPECrate2017_int_base = 118
SPECrate2017_int_peak = 124

CPU2017 License: 9081

Test Date: Jan-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

Platform Notes (Continued)

```
node 1 free: 191798 MB
node distances:
node   0   1
 0: 10 21
 1: 21 10

From /proc/meminfo
MemTotal:      394651256 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:
Linux SUT 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64 x86_64
x86_64 GNU/Linux

run-level 3 Jan 30 14:20

SPEC is set to: /cpu2017.1.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1        ext4  825G  80G  704G  11%  /


Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.2 11/01/2018
Memory:
12x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 225 RE1 (Intel Xeon Gold 5118, 2.30 GHz)

SPECrate2017_int_base = 118
SPECrate2017_int_peak = 124

CPU2017 License: 9081

Test Date: Jan-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
    525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
=====
```

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
    541.leela_r(base)
=====
```

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
    541.leela_r(peak)
=====
```

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
=====
```

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 225 RE1 (Intel Xeon Gold 5118, 2.30 GHz)

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 124

CPU2017 License: 9081

Test Date: Jan-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -fno-standard-realloc-lhs -falign array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 225 RE1 (Intel Xeon Gold 5118, 2.30 GHz)

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 124

CPU2017 License: 9081

Test Date: Jan-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

Base Other Flags (Continued)

Fortran benchmarks:

-m64

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 225 RE1 (Intel Xeon Gold 5118, 2.30 GHz)

SPECrate2017_int_base = 118
SPECrate2017_int_peak = 124

CPU2017 License: 9081

Test Date: Jan-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk_r: -m32

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 225 RE1 (Intel Xeon Gold 5118, 2.30 GHz)

SPECrate2017_int_base = 118
SPECrate2017_int_peak = 124

CPU2017 License: 9081

Test Date: Jan-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

Peak Other Flags (Continued)

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Epsylon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Epsylon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2019-01-31 13:34:43-0500.

Report generated on 2019-02-19 13:55:12 by CPU2017 PDF formatter v6067.

Originally published on 2019-02-19.