



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_int\_base = 29.9

## PowerEdge R240 (Intel Xeon E-2134)

SPECrate2017\_int\_peak = 30.9

CPU2017 License: 55


Test Date: Jan-2019

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

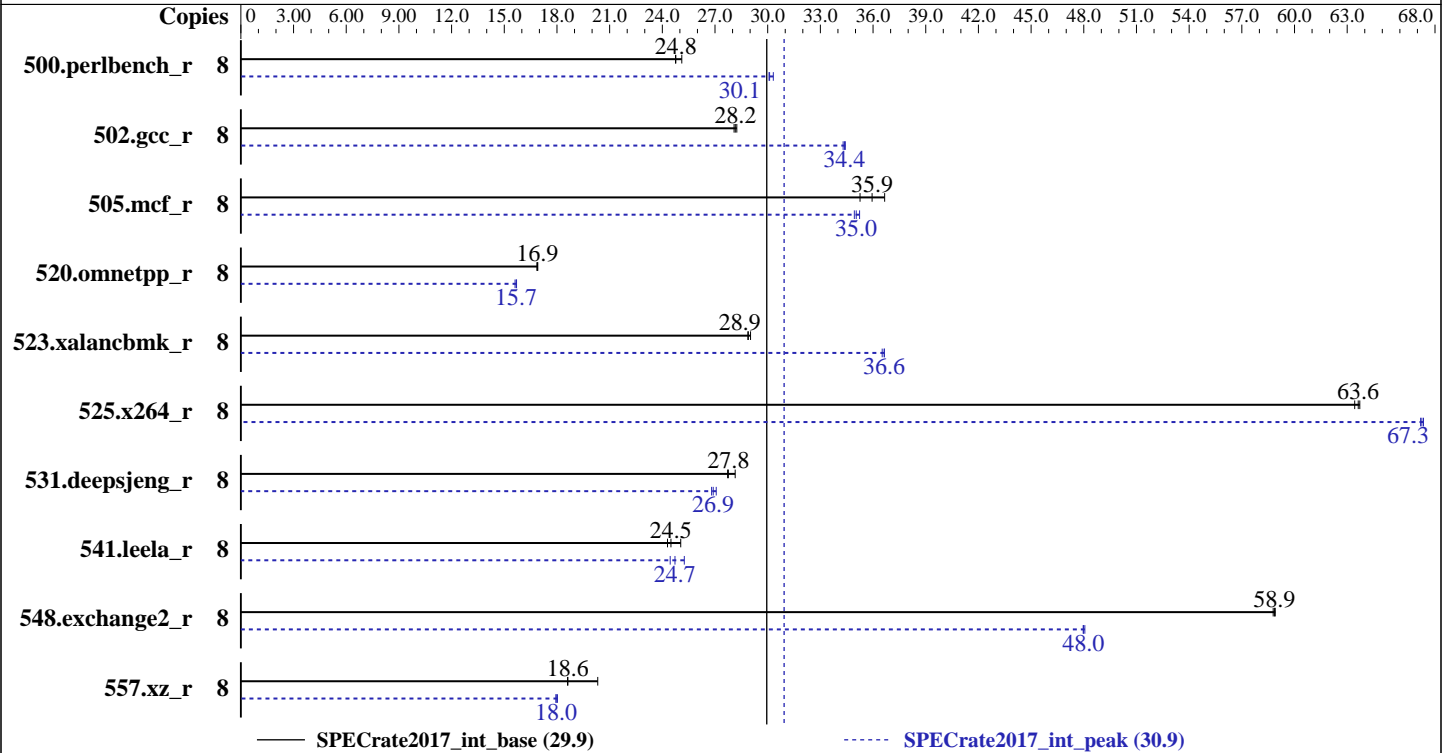

### Hardware

CPU Name: Intel Xeon E-2134  
 Max MHz.: 4500  
 Nominal: 3500  
 Enabled: 4 cores, 1 chip, 2 threads/core  
 Orderable: 1 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 8 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3  
 4.4.126-94.22-default  
 Compiler: C/C++: Version 18.0.2.20180210 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.2.20180210 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.0.1 released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator v5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 29.9

PowerEdge R240 (Intel Xeon E-2134)

SPECrate2017\_int\_peak = 30.9

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2019  
Hardware Availability: Dec-2018  
Software Availability: Apr-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	8	<b>514</b>	<b>24.8</b>	515	24.8	507	25.1	8	<b>423</b>	<b>30.1</b>	420	30.3	423	30.1
502.gcc_r	8	401	28.2	403	28.1	<b>402</b>	<b>28.2</b>	8	329	34.4	<b>330</b>	<b>34.4</b>	330	34.3
505.mcf_r	8	353	36.7	<b>360</b>	<b>35.9</b>	367	35.3	8	<b>369</b>	<b>35.0</b>	367	35.2	370	34.9
520.omnetpp_r	8	<b>621</b>	<b>16.9</b>	623	16.9	621	16.9	8	672	15.6	<b>669</b>	<b>15.7</b>	669	15.7
523.xalancbmk_r	8	293	28.9	291	29.0	<b>292</b>	<b>28.9</b>	8	231	36.5	<b>231</b>	<b>36.6</b>	231	36.6
525.x264_r	8	221	63.4	<b>220</b>	<b>63.6</b>	220	63.7	8	<b>208</b>	<b>67.3</b>	209	67.2	208	67.3
531.deepsjeng_r	8	326	28.1	<b>330</b>	<b>27.8</b>	331	27.7	8	342	26.8	339	27.1	<b>341</b>	<b>26.9</b>
541.leela_r	8	529	25.0	<b>541</b>	<b>24.5</b>	545	24.3	8	<b>536</b>	<b>24.7</b>	542	24.4	525	25.3
548.exchange2_r	8	<b>356</b>	<b>58.9</b>	357	58.8	356	58.9	8	436	48.1	437	48.0	<b>437</b>	<b>48.0</b>
557.xz_r	8	425	20.3	<b>464</b>	<b>18.6</b>	464	18.6	8	482	17.9	479	18.0	<b>481</b>	<b>18.0</b>

SPECrate2017\_int\_base = 29.9

SPECrate2017\_int\_peak = 30.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

SPECrate2017\_int\_base = 29.9

**PowerEdge R240 (Intel Xeon E-2134)**

SPECrate2017\_int\_peak = 30.9

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Jan-2019

**Hardware Availability:** Dec-2018

**Software Availability:** Apr-2018

## General Notes (Continued)

numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor enabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-gw0u Mon Jan 21 08:52:35 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) E-2134 CPU @ 3.50GHz  
1 "physical id"s (chips)  
8 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 4  
siblings : 8  
physical 0: cores 0 1 2 3

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 8  
On-line CPU(s) list: 0-7  
Thread(s) per core: 2  
Core(s) per socket: 4  
Socket(s): 1

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 29.9

PowerEdge R240 (Intel Xeon E-2134)

SPECrate2017\_int\_peak = 30.9

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2019  
Hardware Availability: Dec-2018  
Software Availability: Apr-2018

## Platform Notes (Continued)

NUMA node(s): 1  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 158  
Model name: Intel(R) Xeon(R) E-2134 CPU @ 3.50GHz  
Stepping: 10  
CPU MHz: 899.834  
CPU max MHz: 4500.0000  
CPU min MHz: 800.0000  
BogoMIPS: 7007.96  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 256K  
L3 cache: 8192K  
NUMA node0 CPU(s): 0-7

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch ida arat epb invpcid\_single pln pts dtherm hwp hwp\_act\_window hwp\_epp intel\_pt rsb\_ctxsw spec\_ctrl stibp retpoline kaiser tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmil hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1

/proc/cpuinfo cache data  
cache size : 8192 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)  
node 0 cpus: 0 1 2 3 4 5 6 7  
node 0 size: 64277 MB  
node 0 free: 63826 MB  
node distances:  
node 0  
0: 10

From /proc/meminfo  
MemTotal: 65820248 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
SUSE Linux Enterprise Server 12 SP3

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 29.9

PowerEdge R240 (Intel Xeon E-2134)

SPECrate2017\_int\_peak = 30.9

CPU2017 License: 55

Test Date: Jan-2019

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 3

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION\_ID="12.3"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-gw0u 4.4.126-94.22-default #1 SMP Wed Apr 11 07:45:03 UTC 2018 (9649989)

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

run-level 3 Jan 21 08:51 last=5

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	301G	16G	285G	6%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.1 10/19/2018

Memory:

3x 00AD00000A02 HMA82GU7CJR8N-VK 16 GB 2 rank 2666

1x 00AD00000A07 HMA82GU7CJR8N-VK 16 GB 2 rank 2666

(End of data from sysinfo program)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 29.9

PowerEdge R240 (Intel Xeon E-2134)

SPECrate2017\_int\_peak = 30.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2019

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base)  
557.xz\_r(base)  
-----

icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 500.perlbench\_r(peak) 502.gcc\_r(peak) 505.mcf\_r(peak) 525.x264\_r(peak)  
557.xz\_r(peak)  
-----

icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(peak) 523.xalancbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(peak)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 29.9

PowerEdge R240 (Intel Xeon E-2134)

SPECrate2017\_int\_peak = 30.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2019

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 29.9

PowerEdge R240 (Intel Xeon E-2134)

SPECrate2017\_int\_peak = 30.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2019

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
502.gcc_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 29.9

PowerEdge R240 (Intel Xeon E-2134)

SPECrate2017\_int\_peak = 30.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2019

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Peak Optimization Flags (Continued)

525.x264\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-alias -L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2  
-O3 -no-prec-div -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-01-21 09:52:35-0500.

Report generated on 2019-02-19 13:56:58 by CPU2017 PDF formatter v6067.

Originally published on 2019-02-19.