



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

**SPECrate2017\_fp\_base = 135**  
**SPECrate2017\_fp\_peak = 136**

CPU2017 License: 9081


Test Date: Feb-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

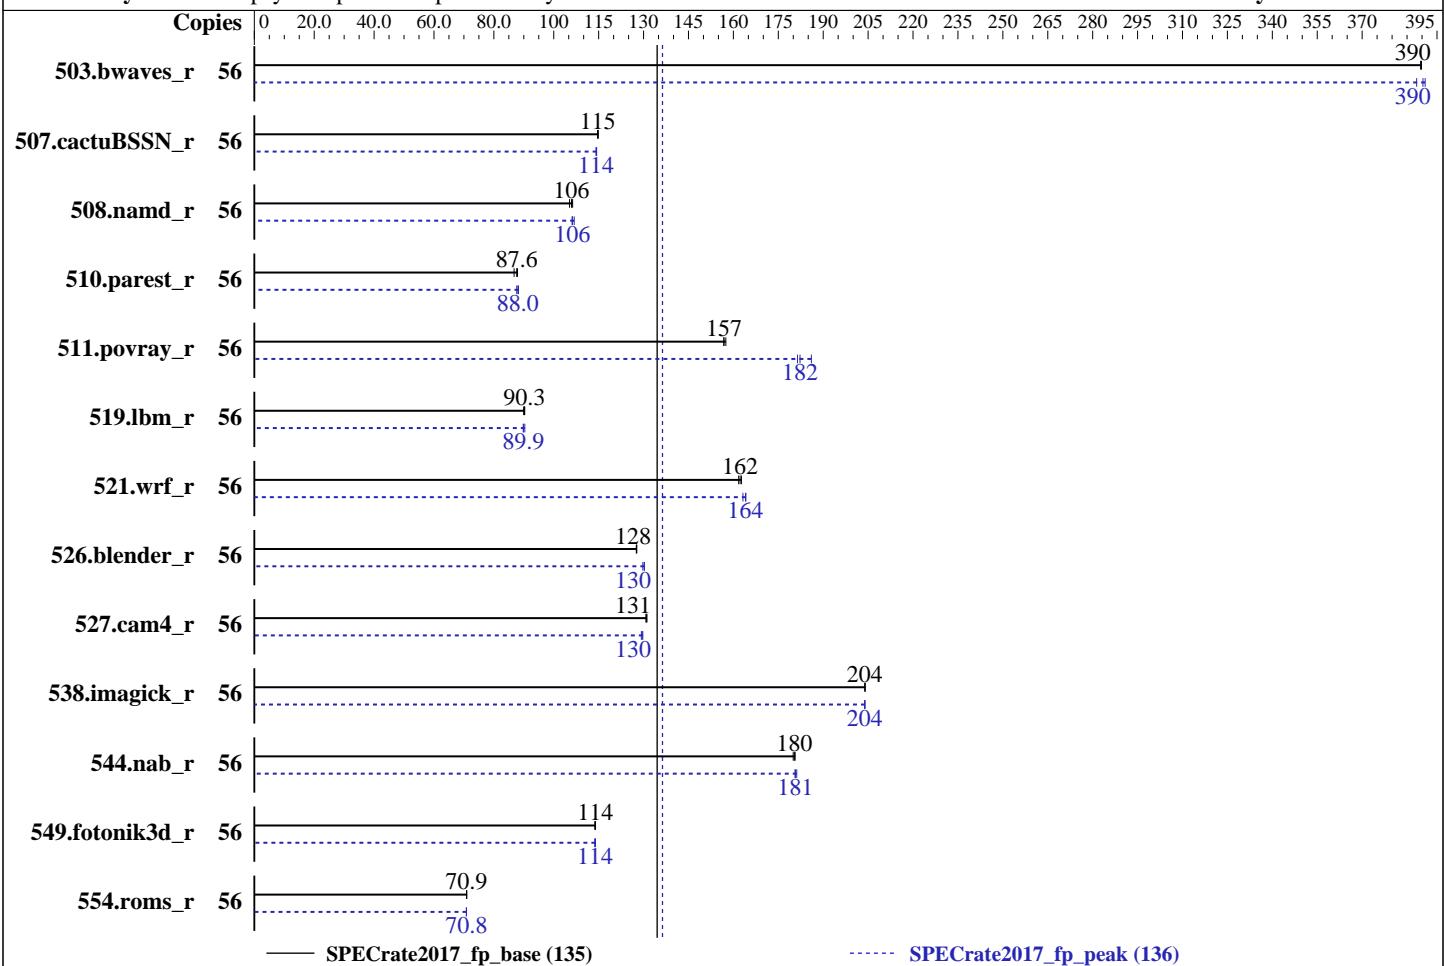

— SPECrate2017\_fp\_base (135)

- - - - - SPECrate2017\_fp\_peak (136)

## Hardware

CPU Name: Intel Xeon Gold 5120  
Max MHz.: 3200  
Nominal: 2200  
Enabled: 28 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 19.25 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (24 x 16 GB 1Rx4 PC4-2666V-R, running at 2400)  
Storage: 1 x 960 GB SSD SATA III  
Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Version BIOS R0016 released Feb-2019  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

**SPECrate2017\_fp\_base = 135**  
**SPECrate2017\_fp\_peak = 136**

CPU2017 License: 9081

Test Date: Feb-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	56	1441	390	1442	390	<b>1441</b>	<b>390</b>	56	1447	388	1436	391	<b>1439</b>	<b>390</b>
507.cactusSSN_r	56	<b>618</b>	<b>115</b>	618	115	617	115	56	620	114	<b>621</b>	<b>114</b>	621	114
508.namd_r	56	500	106	505	105	<b>502</b>	<b>106</b>	56	<b>501</b>	<b>106</b>	498	107	501	106
510.parest_r	56	1689	86.8	<b>1672</b>	<b>87.6</b>	1667	87.9	56	<b>1664</b>	<b>88.0</b>	1660	88.2	1672	87.6
511.povray_r	56	830	157	<b>834</b>	<b>157</b>	834	157	56	703	186	<b>717</b>	<b>182</b>	721	181
519.lbm_r	56	656	89.9	<b>654</b>	<b>90.3</b>	654	90.3	56	<b>657</b>	<b>89.9</b>	653	90.3	657	89.8
521.wrf_r	56	775	162	771	163	<b>773</b>	<b>162</b>	56	<b>765</b>	<b>164</b>	769	163	764	164
526.blender_r	56	668	128	669	128	<b>668</b>	<b>128</b>	56	657	130	<b>655</b>	<b>130</b>	655	130
527.cam4_r	56	<b>747</b>	<b>131</b>	749	131	747	131	56	758	129	755	130	<b>756</b>	<b>130</b>
538.imagick_r	56	683	204	683	204	<b>683</b>	<b>204</b>	56	683	204	<b>683</b>	<b>204</b>	683	204
544.nab_r	56	524	180	<b>522</b>	<b>180</b>	522	181	56	520	181	<b>522</b>	<b>181</b>	522	181
549.fotonik3d_r	56	1919	114	1915	114	<b>1916</b>	<b>114</b>	56	1916	114	1919	114	<b>1916</b>	<b>114</b>
554.roms_r	56	1254	71.0	<b>1256</b>	<b>70.9</b>	1256	70.9	56	1256	70.9	1256	70.8	<b>1256</b>	<b>70.8</b>

**SPECrate2017\_fp\_base = 135**

**SPECrate2017\_fp\_peak = 136**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2017.1.0/lib/intel64:/cpu2017.1.0/je5.0.1-32:/cpu2017.1.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32 GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

**SPECrate2017\_fp\_base = 135**  
**SPECrate2017\_fp\_peak = 136**

**CPU2017 License:** 9081

**Test Date:** Feb-2019

**Test Sponsor:** Epsylon Sp. z o.o. Sp. Komandytowa

**Hardware Availability:** Sep-2017

**Tested by:** Epsylon Sp. z o.o. Sp. Komandytowa

**Software Availability:** Mar-2018

## General Notes (Continued)

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

## Platform Notes

BIOS Settings:

Intel(R) Hyper-Threading Tech = Enabled

CPU Power and Performance Policy = Performance

Intel(R) Turbo Boost Technology = Enabled

C1E = Disabled

Processor C6 = Disabled

IMC Interleaving = Auto

Sub\_NUMA Cluster = Disabled

Set FAN Profile = Performance

Patrol Scrub = Disabled

Sysinfo program /cpu2017.1.0/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on SUT Fri Feb 22 02:26:23 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz

2 "physical id"s (chips)

56 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

siblings : 28

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 56

On-line CPU(s) list: 0-55

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017\_fp\_base = 135  
SPECrate2017\_fp\_peak = 136

CPU2017 License: 9081

Test Date: Feb-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Platform Notes (Continued)

Thread(s) per core: 2  
Core(s) per socket: 14  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz  
Stepping: 4  
CPU MHz: 1135.406  
CPU max MHz: 3200.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4400.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 19712K  
NUMA node0 CPU(s): 0-13,28-41  
NUMA node1 CPU(s): 14-27,42-55  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 fma cxl6 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_l3 cdp\_l3 invpcid\_single intel\_pt spec\_ctrl ibpb\_support tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq\_llc cqmq\_occup\_llc cqmq\_mbm\_total cqmq\_mbm\_local dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req

/proc/cpuinfo cache data  
cache size : 19712 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 28 29 30 31 32 33 34 35 36 37 38 39 40 41  
node 0 size: 195270 MB  
node 0 free: 190374 MB  
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 42 43 44 45 46 47 48 49 50 51 52 53 54 55  
node 1 size: 196608 MB  
node 1 free: 191752 MB  
node distances:  
node 0 1

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

**SPECrate2017\_fp\_base = 135**  
**SPECrate2017\_fp\_peak = 136**

**CPU2017 License:** 9081

**Test Date:** Feb-2019

**Test Sponsor:** Epsylon Sp. z o.o. Sp. Komandytowa

**Hardware Availability:** Sep-2017

**Tested by:** Epsylon Sp. z o.o. Sp. Komandytowa

**Software Availability:** Mar-2018

## Platform Notes (Continued)

```
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal:      394680272 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux SUT 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64 x86_64
x86_64 GNU/Linux
```

```
run-level 3 Feb 21 15:41
```

```
SPEC is set to: /cpu2017.1.0
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext4	825G	93G	691G	12%	/

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.00.01.0016.020120190930 02/01/2019

Memory:

24x Samsung M393A2K40CB2-CTD 16 GB 1 rank 2666, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017\_fp\_base = 135

SPECrate2017\_fp\_peak = 136

CPU2017 License: 9081

Test Date: Feb-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

=====  
icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 519.lbm\_r(peak) 544.nab\_r(peak)

=====  
icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)

=====  
icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 508.namd\_r(peak) 510.parest\_r(peak)

=====  
icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(base) 526.blender\_r(base)

=====  
icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(peak) 526.blender\_r(peak)

=====  
icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(base)

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017\_fp\_base = 135

SPECrate2017\_fp\_peak = 136

CPU2017 License: 9081

Test Date: Feb-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

-----

=====

FC 507.cactubSSN\_r(peak)

-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

-----

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms\_r(peak)

-----

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

-----

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(peak) 527.cam4\_r(peak)

-----

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017\_fp\_base = 135

SPECrate2017\_fp\_peak = 136

CPU2017 License: 9081

Test Date: Feb-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017\_fp\_base = 135

SPECrate2017\_fp\_peak = 136

CPU2017 License: 9081

Test Date: Feb-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

**SPECrate2017\_fp\_base = 135**  
**SPECrate2017\_fp\_peak = 136**

CPU2017 License: 9081

Test Date: Feb-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

538.imagick\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab\_r: Same as 519.lbm\_r

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

**SPECrate2017\_fp\_base = 135**  
**SPECrate2017\_fp\_peak = 136**

**CPU2017 License:** 9081

**Test Sponsor:** Epsylon Sp. z o.o. Sp. Komandytowa

**Tested by:** Epsylon Sp. z o.o. Sp. Komandytowa

**Test Date:** Feb-2019

**Hardware Availability:** Sep-2017

**Software Availability:** Mar-2018

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nstandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nstandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nstandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nstandard-realloc-lhs -align array32byte
```

## Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa  
eterio 220 RA1 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017\_fp\_base = 135

SPECrate2017\_fp\_peak = 136

CPU2017 License: 9081

Test Date: Feb-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Epsylon-Platform-Flags-RevA-Feb-2018-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Epsylon-Platform-Flags-RevA-Feb-2018-For-Intel-Platform.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2019-02-21 20:26:22-0500.

Report generated on 2019-03-19 14:58:49 by CPU2017 PDF formatter v6067.

Originally published on 2019-03-19.