



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55


Test Date: Jun-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

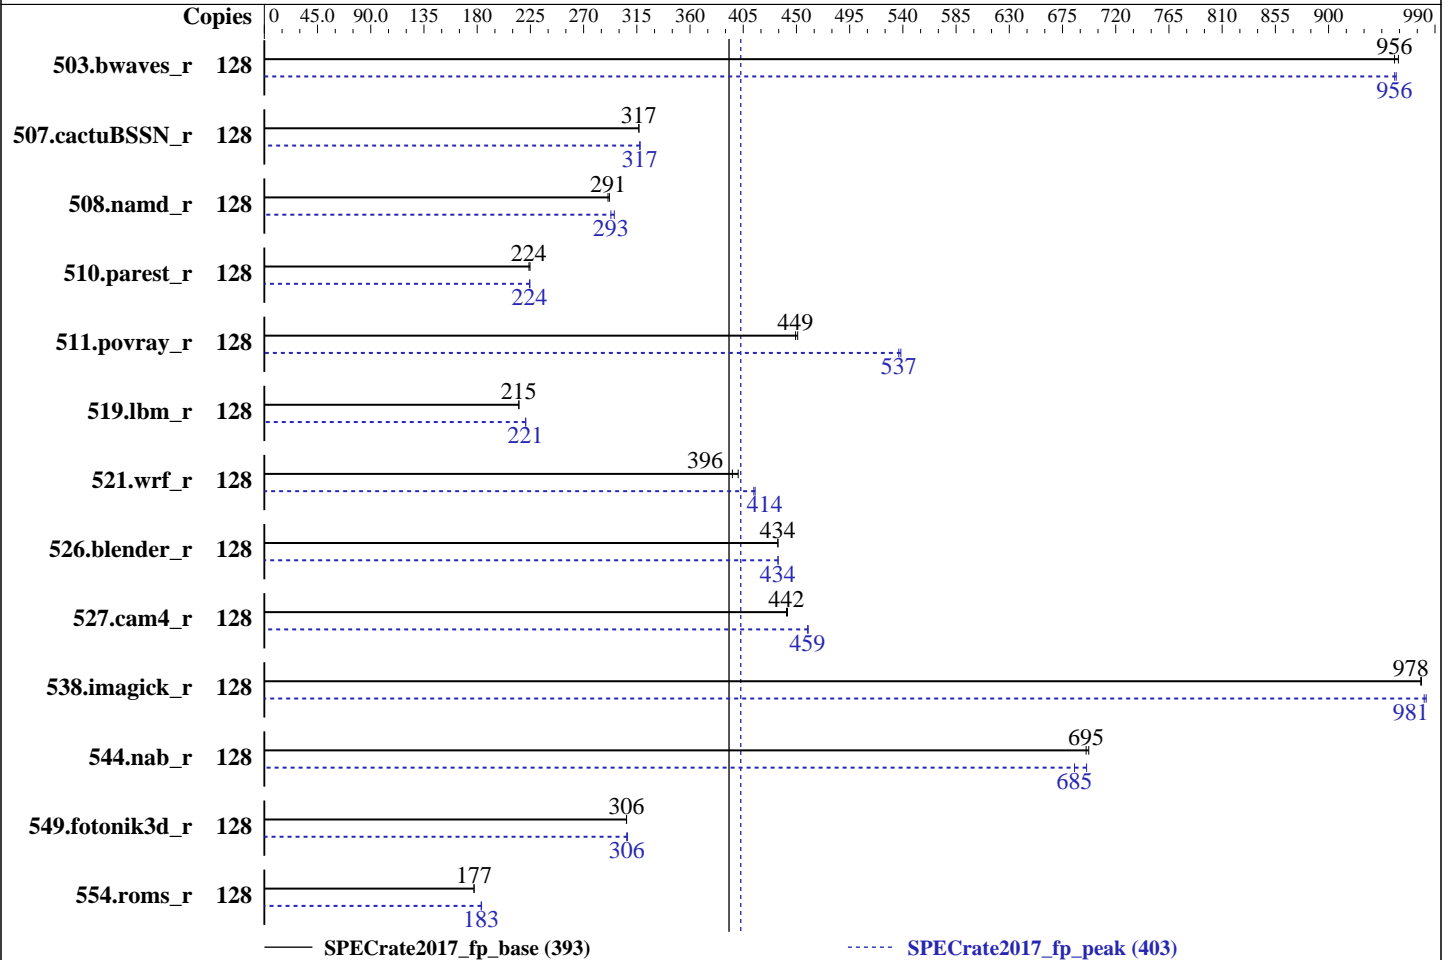

### Hardware

CPU Name: Intel Xeon Gold 6242  
 Max MHz.: 3900  
 Nominal: 2800  
 Enabled: 64 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Ubuntu 18.04.2 LTS  
 kernel 4.15.0-45-generic  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
 Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran  
 Compiler Build 20181018 for Linux  
 Parallel: No  
 Firmware: Version 2.1.8 released Apr-2019  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<b>1343</b>	<b>956</b>	1338	959			128	1341	957	<b>1343</b>	<b>956</b>		
507.cactuBSSN_r	128	<b>512</b>	<b>317</b>	511	317			128	510	318	<b>510</b>	<b>317</b>		
508.namd_r	128	417	292	<b>418</b>	<b>291</b>			128	411	296	<b>415</b>	<b>293</b>		
510.parest_r	128	<b>1496</b>	<b>224</b>	1490	225			128	1491	225	<b>1493</b>	<b>224</b>		
511.povray_r	128	<b>665</b>	<b>449</b>	663	451			128	<b>557</b>	<b>537</b>	555	538		
519.lbm_r	128	627	215	<b>627</b>	<b>215</b>			128	610	221	<b>611</b>	<b>221</b>		
521.wrf_r	128	716	401	<b>724</b>	<b>396</b>			128	<b>693</b>	<b>414</b>	691	415		
526.blender_r	128	<b>449</b>	<b>434</b>	449	434			128	449	435	<b>449</b>	<b>434</b>		
527.cam4_r	128	506	442	<b>507</b>	<b>442</b>			128	487	460	<b>487</b>	<b>459</b>		
538.imagick_r	128	325	979	<b>326</b>	<b>978</b>			128	<b>325</b>	<b>981</b>	324	983		
544.nab_r	128	<b>310</b>	<b>695</b>	309	697			128	<b>314</b>	<b>685</b>	310	695		
549.fotonik3d_r	128	<b>1629</b>	<b>306</b>	1628	306			128	<b>1628</b>	<b>306</b>	1624	307		
554.roms_r	128	1147	177	<b>1147</b>	<b>177</b>			128	<b>1109</b>	<b>183</b>	1107	184		

SPECrate2017\_fp\_base = 393

SPECrate2017\_fp\_peak = 403

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## General Notes (Continued)

```

Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

```

## Platform Notes

```

BIOS settings:
ADDDC setting disabled
Sub NUMA Cluster enabled
Virtualization Technology disabled
DCU Streamer Prefetcher disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
C1E disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor enabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on intel-sut Tue Jun 25 21:45:47 2019

```

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6242 CPU @ 2.80GHz
 4 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

```

```

From lscpu:
Architecture: x86_64

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55

Test Date: Jun-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

```

CPU op-mode(s):      32-bit, 64-bit
Byte Order:          Little Endian
CPU(s):              128
On-line CPU(s) list: 0-127
Thread(s) per core:  2
Core(s) per socket: 16
Socket(s):           4
NUMA node(s):        8
Vendor ID:           GenuineIntel
CPU family:           6
Model:               85
Model name:          Intel(R) Xeon(R) Gold 6242 CPU @ 2.80GHz
Stepping:            6
CPU MHz:             3194.112
BogoMIPS:            5600.00
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:            1024K
L3 cache:            22528K
NUMA node0 CPU(s):  0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120
NUMA node1 CPU(s):  1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121
NUMA node2 CPU(s):  2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122
NUMA node3 CPU(s):  3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123
NUMA node4 CPU(s):  4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124
NUMA node5 CPU(s):  5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125
NUMA node6 CPU(s):  6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126
NUMA node7 CPU(s):  7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelt rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd mba ibrs
ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx
smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku
ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Platform Notes (Continued)

```

node 0 size: 95168 MB
node 0 free: 94793 MB
node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121
node 1 size: 96764 MB
node 1 free: 96409 MB
node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122
node 2 size: 96764 MB
node 2 free: 96410 MB
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123
node 3 size: 96764 MB
node 3 free: 94508 MB
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124
node 4 size: 96764 MB
node 4 free: 96415 MB
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125
node 5 size: 96764 MB
node 5 free: 96393 MB
node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126
node 6 size: 96764 MB
node 6 free: 94526 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127
node 7 size: 96742 MB
node 7 free: 96332 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  21  21  21  11  21  21  21
  1:  21  10  21  21  21  11  21  21
  2:  21  21  10  21  21  21  11  21
  3:  21  21  21  10  21  21  21  11
  4:  11  21  21  21  10  21  21  21
  5:  21  11  21  21  21  10  21  21
  6:  21  21  11  21  21  21  10  21
  7:  21  21  21  11  21  21  21  10

```

```

From /proc/meminfo
MemTotal:      791040364 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

```

```

From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="18.04.2 LTS (Bionic Beaver)"

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Platform Notes (Continued)

```
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 18.04.2 LTS"
VERSION_ID="18.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

```
run-level 5 Jun 25 15:59
```

```
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 439G 28G 389G 7% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 2.1.8 04/30/2019
Memory:
12x 002C069D002C 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933
12x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
24x Not Specified Not Specified
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)  
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Compiler Version Notes (Continued)

CC 519.lbm\_r(peak)

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 507.cactuBSSN\_r(base, peak)  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Compiler Version Notes (Continued)

```
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 554.roms_r(peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 521.wrf_r(base) 527.cam4_r(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 521.wrf_r(peak) 527.cam4_r(peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
-----
```

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
```

```
507.cactuBSSN_r: -DSPEC_LP64
```

```
508.namd_r: -DSPEC_LP64
```

```
510.parest_r: -DSPEC_LP64
```

```
511.povray_r: -DSPEC_LP64
```

```
519.lbm_r: -DSPEC_LP64
```

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

```
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
538.imagick_r: -DSPEC_LP64
```

```
544.nab_r: -DSPEC_LP64
```

```
549.fotonik3d_r: -DSPEC_LP64
```

```
554.roms_r: -DSPEC_LP64
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55

Test Date: Jun-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 393

PowerEdge R940 (Intel Xeon Gold 6242, 2.80GHz)

SPECrate2017\_fp\_peak = 403

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-06-25 17:45:46-0400.  
Report generated on 2019-07-23 15:02:45 by CPU2017 PDF formatter v6067.  
Originally published on 2019-07-23.