



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 233

PowerEdge FC640 (Intel Xeon Gold 6262V, 1.90GHz)

SPECrate2017_int_peak = 243

CPU2017 License: 55


Test Date: Jun-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Jun-2019

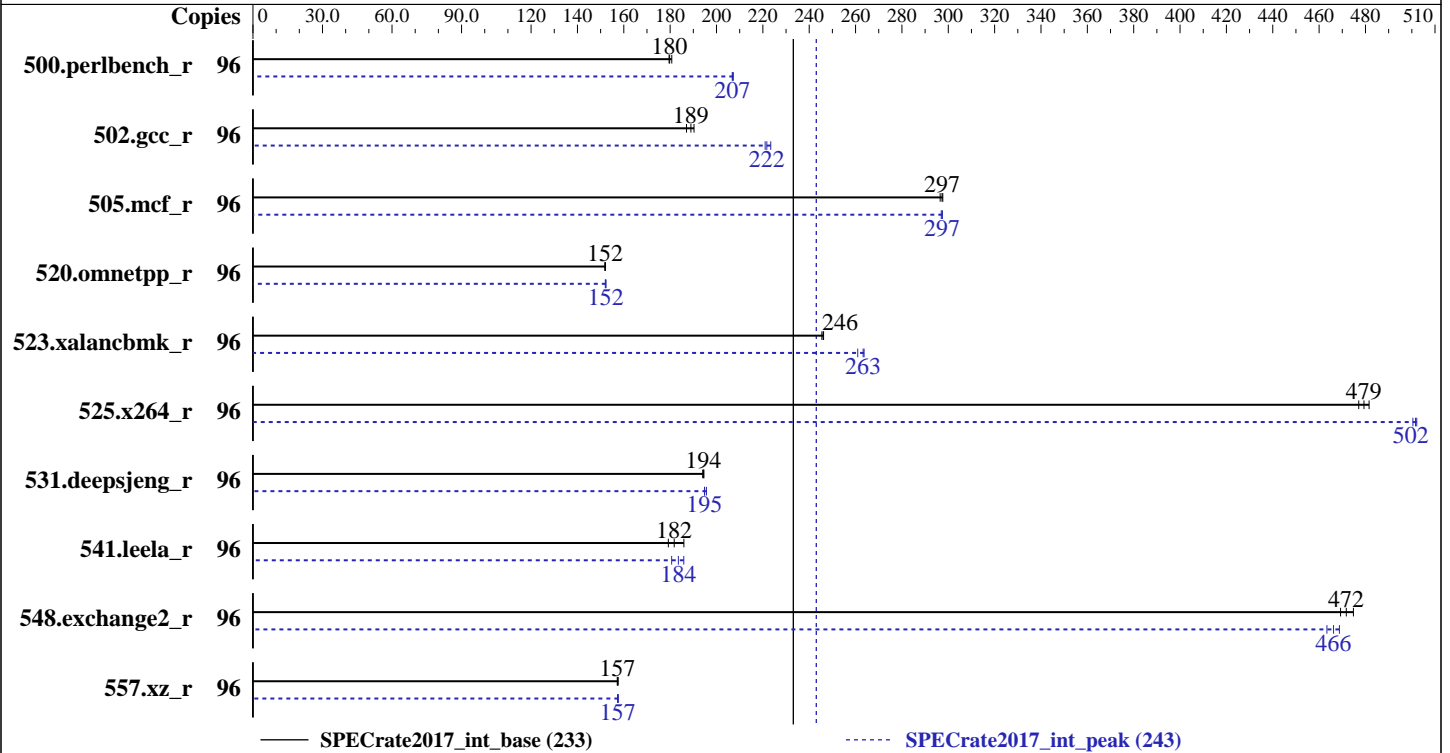

Hardware

CPU Name: Intel Xeon Gold 6262V
 Max MHz.: 3600
 Nominal: 1900
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 33 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Ubuntu 18.04.2 LTS
 kernel 4.15.0-54-generic
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++
 Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran
 Compiler Build 20190416 for Linux
 Parallel: No
 Firmware: Version 2.2.11 released Jun-2019
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 233

PowerEdge FC640 (Intel Xeon Gold 6262V, 1.90GHz)

SPECrate2017_int_peak = 243

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2019
Hardware Availability: Apr-2019
Software Availability: Jun-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	846	181	851	180	850	180	96	739	207	739	207	737	207
502.gcc_r	96	719	189	714	190	727	187	96	615	221	608	223	613	222
505.mcf_r	96	521	298	522	297	523	297	96	522	297	522	297	522	297
520.omnetpp_r	96	829	152	828	152	829	152	96	827	152	828	152	827	152
523.xalancbmk_r	96	412	246	412	246	413	245	96	384	264	388	261	385	263
525.x264_r	96	352	477	351	479	349	482	96	336	500	335	502	335	502
531.deepsjeng_r	96	566	195	566	194	567	194	96	565	195	562	196	565	195
541.leela_r	96	855	186	887	179	875	182	96	880	181	866	184	855	186
548.exchange2_r	96	536	469	530	475	533	472	96	539	466	543	463	537	469
557.xz_r	96	660	157	658	158	659	157	96	659	157	658	158	659	157

SPECrate2017_int_base = 233

SPECrate2017_int_peak = 243

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 233

PowerEdge FC640 (Intel Xeon Gold 6262V, 1.90GHz)

SPECrate2017_int_peak = 243

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Jun-2019

General Notes (Continued)

numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:
ADDDC setting disabled
Sub NUMA Cluster enabled
Virtualization Technology disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
ClE disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor enabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on intel-sut Fri Jul 12 15:27:44 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6262V CPU @ 1.90GHz
2 "physical id"s (chips)
96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 96
On-line CPU(s) list: 0-95

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 233

PowerEdge FC640 (Intel Xeon Gold 6262V, 1.90GHz)

SPECrate2017_int_peak = 243

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2019
Hardware Availability: Apr-2019
Software Availability: Jun-2019

Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6262V CPU @ 1.90GHz
Stepping: 7
CPU MHz: 2216.944
BogoMIPS: 3800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s):
0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92
NUMA node1 CPU(s):
1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93
NUMA node2 CPU(s):
2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94
NUMA node3 CPU(s):
3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 33792 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92
node 0 size: 95144 MB
node 0 free: 94699 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93
node 1 size: 96763 MB

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 233

PowerEdge FC640 (Intel Xeon Gold 6262V, 1.90GHz)

SPECrate2017_int_peak = 243

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Jun-2019

Platform Notes (Continued)

```

node 1 free: 96253 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94
node 2 size: 96742 MB
node 2 free: 96446 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95
node 3 size: 96762 MB
node 3 free: 96482 MB
node distances:
node  0  1  2  3
  0:  10  21  11  21
  1:  21  10  21  11
  2:  11  21  10  21
  3:  21  11  21  10

```

```

From /proc/meminfo
MemTotal:          394661964 kB
HugePages_Total:    0
Hugepagesize:      2048 kB

```

```

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

```

```

From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="18.04.2 LTS (Bionic Beaver)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 18.04.2 LTS"
  VERSION_ID="18.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"

```

```

uname -a:
Linux intel-sut 4.15.0-54-generic #58-Ubuntu SMP Mon Jun 24 10:55:24 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling

```

run-level 5 Jul 8 18:25

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 233

PowerEdge FC640 (Intel Xeon Gold 6262V, 1.90GHz)

SPECrate2017_int_peak = 243

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Jun-2019

Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	439G	35G	382G	9%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.2.11 06/14/2019

Memory:

3x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2400
 9x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2400
 4x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 502.gcc_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
CXXC 523.xalanbmk_r(peak)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 233

PowerEdge FC640 (Intel Xeon Gold 6262V, 1.90GHz)

SPECrate2017_int_peak = 243

CPU2017 License: 55

Test Date: Jun-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Jun-2019

Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 233

PowerEdge FC640 (Intel Xeon Gold 6262V, 1.90GHz)

SPECrate2017_int_peak = 243

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Jun-2019

Base Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64

-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64

-lqkmalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte

-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64

-lqkmalloc

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64 -std=c11

502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

icpc -m64

523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 233

PowerEdge FC640 (Intel Xeon Gold 6262V, 1.90GHz)

SPECrate2017_int_peak = 243

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Jun-2019

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: Same as 505.mcf_r
```

C++ benchmarks:

```
520.omnetpp_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 233

PowerEdge FC640 (Intel Xeon Gold 6262V, 1.90GHz)

SPECrate2017_int_peak = 243

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Jun-2019

Peak Optimization Flags (Continued)

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmallocc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-07-12 11:27:43-0400.

Report generated on 2019-08-06 17:56:29 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-06.