



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Gold 6230, 2.10GHz)

SPECrate2017\_int\_base = 226

SPECrate2017\_int\_peak = 235

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

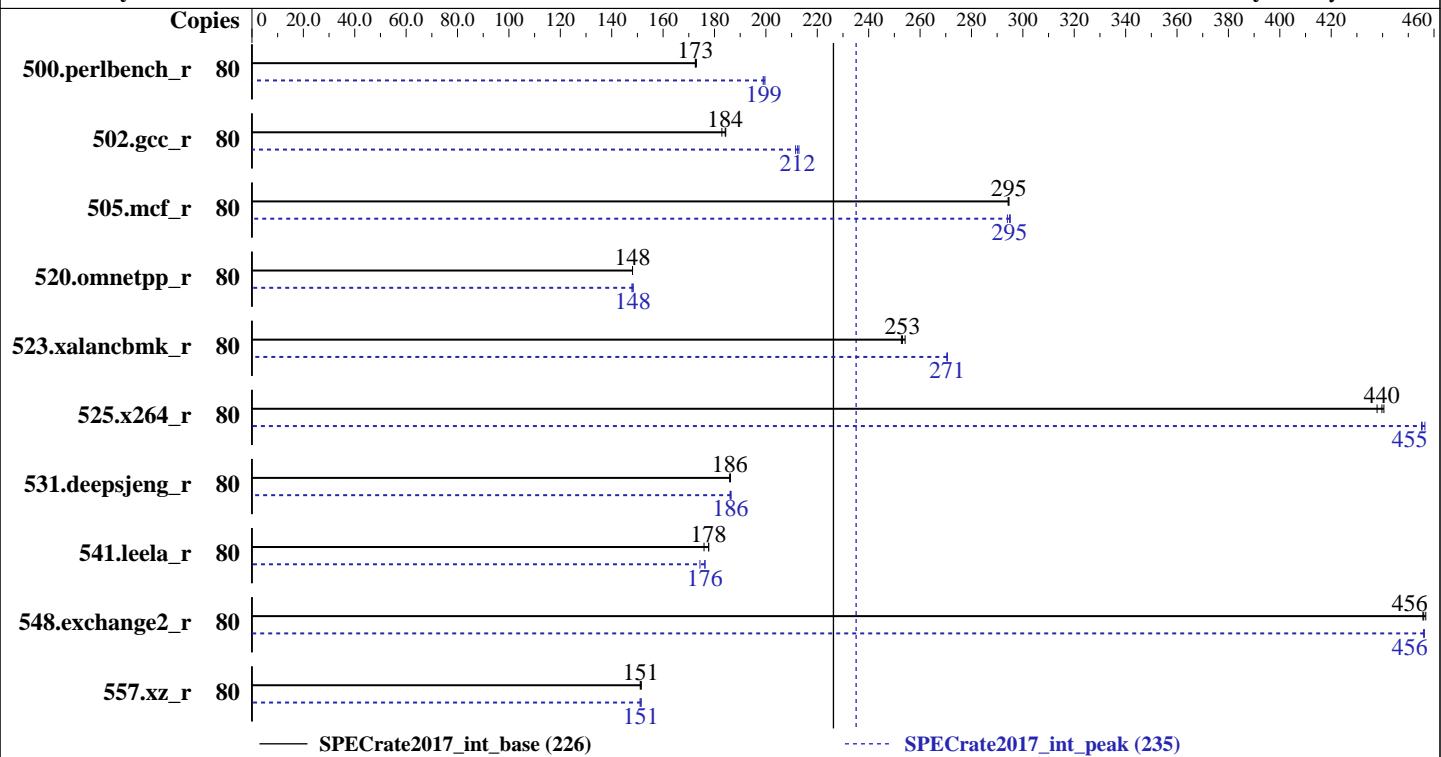

— SPECrate2017\_int\_base (226)

— SPECrate2017\_int\_peak (235)

## Hardware

CPU Name: Intel Xeon Gold 6230  
Max MHz.: 3900  
Nominal: 2100  
Enabled: 40 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 27.5 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 480 GB SATA SSD  
Other: None

## Software

OS: Ubuntu 18.04.2 LTS  
Compiler: kernel 4.15.0-46-generic  
Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
Compiler Build 20190416 for Linux;  
Compiler: Fortran: Version 19.0.4.227 of Intel Fortran  
Compiler Build 20190416 for Linux  
Parallel: No  
Firmware: Version 2.2.9 released May-2019  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

**SPECrate2017\_int\_base = 226**

**SPECrate2017\_int\_peak = 235**

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	738	173	736	173	<b>738</b>	<b>173</b>	80	<b>639</b>	<b>199</b>	640	199	638	200
502.gcc_r	80	<b>615</b>	<b>184</b>	614	184	619	183	80	<b>532</b>	<b>213</b>	535	212	<b>533</b>	<b>212</b>
505.mcf_r	80	<b>439</b>	<b>295</b>	439	295	439	294	80	<b>438</b>	<b>295</b>	438	295	440	294
520.omnetpp_r	80	709	148	709	148	<b>709</b>	<b>148</b>	80	<b>707</b>	148	710	148	<b>708</b>	<b>148</b>
523.xalancbmk_r	80	334	253	<b>334</b>	<b>253</b>	332	254	80	<b>312</b>	<b>271</b>	312	271	312	270
525.x264_r	80	<b>319</b>	<b>440</b>	320	438	318	441	80	<b>307</b>	<b>456</b>	308	455	<b>308</b>	<b>455</b>
531.deepsjeng_r	80	493	186	492	186	<b>493</b>	<b>186</b>	80	493	186	<b>492</b>	<b>186</b>	492	186
541.leela_r	80	745	178	753	176	<b>746</b>	<b>178</b>	80	760	174	<b>752</b>	<b>176</b>	751	176
548.exchange2_r	80	460	456	459	457	<b>460</b>	<b>456</b>	80	<b>459</b>	<b>456</b>	459	456	460	456
557.xz_r	80	572	151	<b>571</b>	<b>151</b>	570	152	80	<b>572</b>	151	<b>571</b>	<b>151</b>	571	151

**SPECrate2017\_int\_base = 226**

**SPECrate2017\_int\_peak = 235**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017\_int\_base = 226

SPECCrate2017\_int\_peak = 235

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

ADDDC setting disabled

Virtualization Technology disabled

DCU Streamer Prefetcher disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on intel-sut Mon Jul 1 01:09:23 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz

2 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 80

On-line CPU(s) list: 0-79

Thread(s) per core: 2

Core(s) per socket: 20

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

**SPECrate2017\_int\_base = 226**

**SPECrate2017\_int\_peak = 235**

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

```

Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz
Stepping: 6
CPU MHz: 2100.000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76
node 0 size: 95146 MB
node 0 free: 94670 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77
node 1 size: 96743 MB
node 1 free: 96470 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78
node 2 size: 96764 MB
node 2 free: 96318 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79
node 3 size: 96762 MB

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Gold 6230, 2.10GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_int\_base = 226

SPECrate2017\_int\_peak = 235

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Platform Notes (Continued)

```
node 3 free: 96529 MB
node distances:
node  0   1   2   3
 0: 10  21  11  21
 1: 21  10  21  11
 2: 11  21  10  21
 3: 21  11  21  10

From /proc/meminfo
  MemTotal:      394666960 kB
  HugePages_Total:       0
  Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="18.04.2 LTS (Bionic Beaver)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 18.04.2 LTS"
  VERSION_ID="18.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"

uname -a:
Linux intel-sut 4.15.0-46-generic #49-Ubuntu SMP Wed Feb 6 09:33:07 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

run-level 3 Jul 1 00:52

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  439G  31G  386G   8%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 226

SPECrate2017\_int\_peak = 235

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.2.9 05/08/2019

Memory:

11x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933  
1x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933  
12x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 502.gcc\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

CC 500.perlbench\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

CXXC 523.xalancbmk\_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 226

PowerEdge MX740c (Intel Xeon Gold 6230, 2.10GHz)

SPECrate2017\_int\_peak = 235

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Compiler Version Notes (Continued)

peak) 541.leela\_r(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Gold 6230, 2.10GHz)

**SPECrate2017\_int\_base = 226**

**SPECrate2017\_int\_peak = 235**

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

502.gcc\_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

```
icpc -m64
```

523.xalancbmk\_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 226

SPECrate2017\_int\_peak = 235

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Peak Portability Flags (Continued)

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Gold 6230, 2.10GHz)

SPECCrate2017\_int\_base = 226

SPECCrate2017\_int\_peak = 235

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Optimization Flags (Continued)

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-06-30 21:09:22-0400.

Report generated on 2019-08-21 12:02:45 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-20.