



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(1.90 GHz, Intel Xeon Bronze 3204)

**SPECrate®2017\_int\_base = 42.1**

**SPECrate®2017\_int\_peak = 42.9**

CPU2017 License: 9016


**Test Date:** Aug-2019

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Apr-2019

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** May-2019

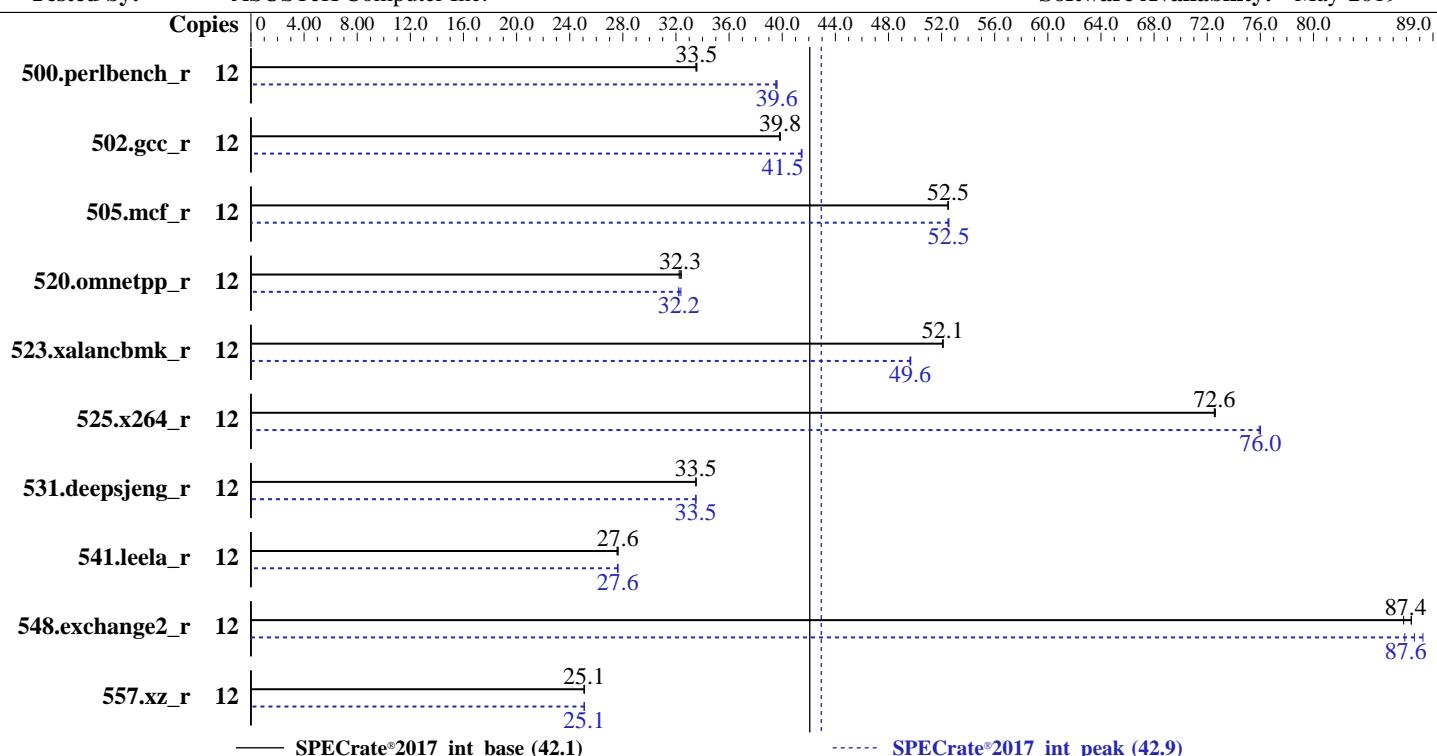

Hardware		Software	
CPU Name:	Intel Xeon Bronze 3204	OS:	SUSE Linux Enterprise Server 15
Max MHz:	1900	Compiler:	Kernel 4.12.14-23-default
Nominal:	1900		C/C++: Version 19.0.4.227 of Intel C/C++
Enabled:	12 cores, 2 chips		Compiler Build 20190416 for Linux;
Orderable:	1,2 chips		Fortran: Version 19.0.4.227 of Intel Fortran
Cache L1:	32 KB I + 32 KB D on chip per core		Compiler Build 20190416 for Linux
L2:	1 MB I+D on chip per core	Parallel:	No
L3:	8.25 MB I+D on chip per chip	Firmware:	Version 5102 released Feb-2019
Other:	None	File System:	xfs
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2133)	System State:	Run level 3 (multi-user)
Storage:	1 x 1 TB SATA SSD	Base Pointers:	64-bit
Other:	None	Peak Pointers:	32/64-bit
		Other:	jemalloc: jemalloc memory allocator library V5.0.1
		Power Management:	--



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(1.90 GHz, Intel Xeon Bronze 3204)

**SPECrate®2017\_int\_base = 42.1**

**SPECrate®2017\_int\_peak = 42.9**

CPU2017 License: 9016

Test Date: Aug-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	569	33.6	<b>570</b>	<b>33.5</b>	570	33.5	12	482	39.6	483	39.5	<b>483</b>	<b>39.6</b>		
502.gcc_r	12	426	39.9	<b>426</b>	<b>39.8</b>	427	39.8	12	410	41.4	<b>410</b>	<b>41.5</b>			410	41.5
505.mcf_r	12	<b>369</b>	<b>52.5</b>	370	52.5	369	52.5	12	370	52.5	369	52.5	<b>369</b>	<b>52.5</b>		
520.omnetpp_r	12	<b>487</b>	<b>32.3</b>	488	32.2	486	32.4	12	486	32.4	489	32.2	<b>489</b>	<b>32.2</b>		
523.xalancbmk_r	12	243	52.1	243	52.1	<b>243</b>	<b>52.1</b>	12	255	49.7	<b>255</b>	<b>49.6</b>			255	49.6
525.x264_r	12	<b>290</b>	<b>72.6</b>	290	72.5	289	72.6	12	277	75.9	276	76.0	<b>276</b>	<b>76.0</b>		
531.deepsjeng_r	12	<b>410</b>	<b>33.5</b>	411	33.5	410	33.5	12	410	33.5	411	33.5	<b>411</b>	<b>33.5</b>		
541.leela_r	12	<b>720</b>	<b>27.6</b>	719	27.6	721	27.6	12	720	27.6	<b>719</b>	<b>27.6</b>			719	27.6
548.exchange2_r	12	362	86.8	<b>360</b>	<b>87.4</b>	360	87.4	12	356	88.2	<b>359</b>	<b>87.6</b>			362	86.9
557.xz_r	12	517	25.1	<b>517</b>	<b>25.1</b>	516	25.1	12	517	25.1	<b>516</b>	<b>25.1</b>			516	25.1

**SPECrate®2017\_int\_base = 42.1**

**SPECrate®2017\_int\_peak = 42.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/spec2017\_19u4/lib/intel64:/spec2017\_19u4/lib/ia32:  
/spec2017\_19u4/je5.0.1-32"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(1.90 GHz, Intel Xeon Bronze 3204)

SPECrate®2017\_int\_base = 42.1

SPECrate®2017\_int\_peak = 42.9

CPU2017 License: 9016

Test Date: Aug-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

ENERGY\_PERF\_BIAS\_CFG mode = performance

Engine Boost = Level3(Max)

LLC dead line allc = Disabled

SR-IOV Support = Disabled

CSM Support = Disabled

Sysinfo program /spec2017\_19u4/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-gh78 Mon Aug 5 10:27:49 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3204 CPU @ 1.90GHz

2 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 6

physical 0: cores 0 1 2 3 4 5

physical 1: cores 0 1 2 3 4 5

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 18

On-line CPU(s) list: 0-11

Off-line CPU(s) list: 12-17

Thread(s) per core: 1

Core(s) per socket: 6

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(1.90 GHz, Intel Xeon Bronze 3204)

SPECrate®2017\_int\_base = 42.1

SPECrate®2017\_int\_peak = 42.9

CPU2017 License: 9016

Test Date: Aug-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Platform Notes (Continued)

Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Bronze 3204 CPU @ 1.90GHz  
Stepping: 6  
CPU MHz: 1900.000  
CPU max MHz: 1900.0000  
CPU min MHz: 800.0000  
BogoMIPS: 3800.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 8448K  
NUMA node0 CPU(s): 0-5  
NUMA node1 CPU(s): 6-11  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtTopology nonstop\_tsc cpuid aperfmpf perf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 cdp\_l3 invpcid\_single mba tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local ibpb ibrs stibp dtherm arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req pku ospke avx512\_vnni arch\_capabilities ssbd

/proc/cpuinfo cache data  
cache size : 8448 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5  
node 0 size: 385551 MB  
node 0 free: 384986 MB  
node 1 cpus: 6 7 8 9 10 11  
node 1 size: 387024 MB  
node 1 free: 386480 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(1.90 GHz, Intel Xeon Bronze 3204)

SPECrate®2017\_int\_base = 42.1

SPECrate®2017\_int\_peak = 42.9

CPU2017 License: 9016

Test Date: Aug-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      791117712 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="SLES"
  VERSION="15"
  VERSION_ID="15"
  PRETTY_NAME="SUSE Linux Enterprise Server 15"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux linux-gh78 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):           Not affected
CVE-2017-5753 (Spectre variant 1):  Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):  Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

run-level 3 Aug 5 10:23

SPEC is set to: /spec2017\_19u4

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	929G	15G	914G	2%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 5102 02/11/2019

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2133

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(1.90 GHz, Intel Xeon Bronze 3204)

SPECrate®2017\_int\_base = 42.1

SPECrate®2017\_int\_peak = 42.9

CPU2017 License: 9016

Test Date: Aug-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 523.xalancbmk\_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(1.90 GHz, Intel Xeon Bronze 3204)

SPECrate®2017\_int\_base = 42.1

SPECrate®2017\_int\_peak = 42.9

CPU2017 License: 9016

Test Date: Aug-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Compiler Version Notes (Continued)

Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 523.xalancbmk\_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2\_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(1.90 GHz, Intel Xeon Bronze 3204)

SPECrate®2017\_int\_base = 42.1

SPECrate®2017\_int\_peak = 42.9

CPU2017 License: 9016

Test Date: Aug-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Base Portability Flags (Continued)

502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

502.gcc\_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

```
icpc -m64
```

523.xalancbmk\_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/ia32\_lin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(1.90 GHz, Intel Xeon Bronze 3204)

SPECrate®2017\_int\_base = 42.1

SPECrate®2017\_int\_peak = 42.9

CPU2017 License: 9016

Test Date: Aug-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: Same as 505.mcf_r
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(1.90 GHz, Intel Xeon Bronze 3204)

SPECrate®2017\_int\_base = 42.1

SPECrate®2017\_int\_peak = 42.9

CPU2017 License: 9016

Test Date: Aug-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-v2.0-revE.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-v2.0-revE.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-04 22:27:48-0400.

Report generated on 2020-12-31 16:29:36 by CPU2017 PDF formatter v6255.

Originally published on 2019-09-17.