



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

SPECspeed®2017\_int\_peak = 8.43

SPECspeed®2017\_int\_energy\_peak = 43.8

CPU2017 License: 003


Test Sponsor: HPE

Tested by: HPE

Test Date: May-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

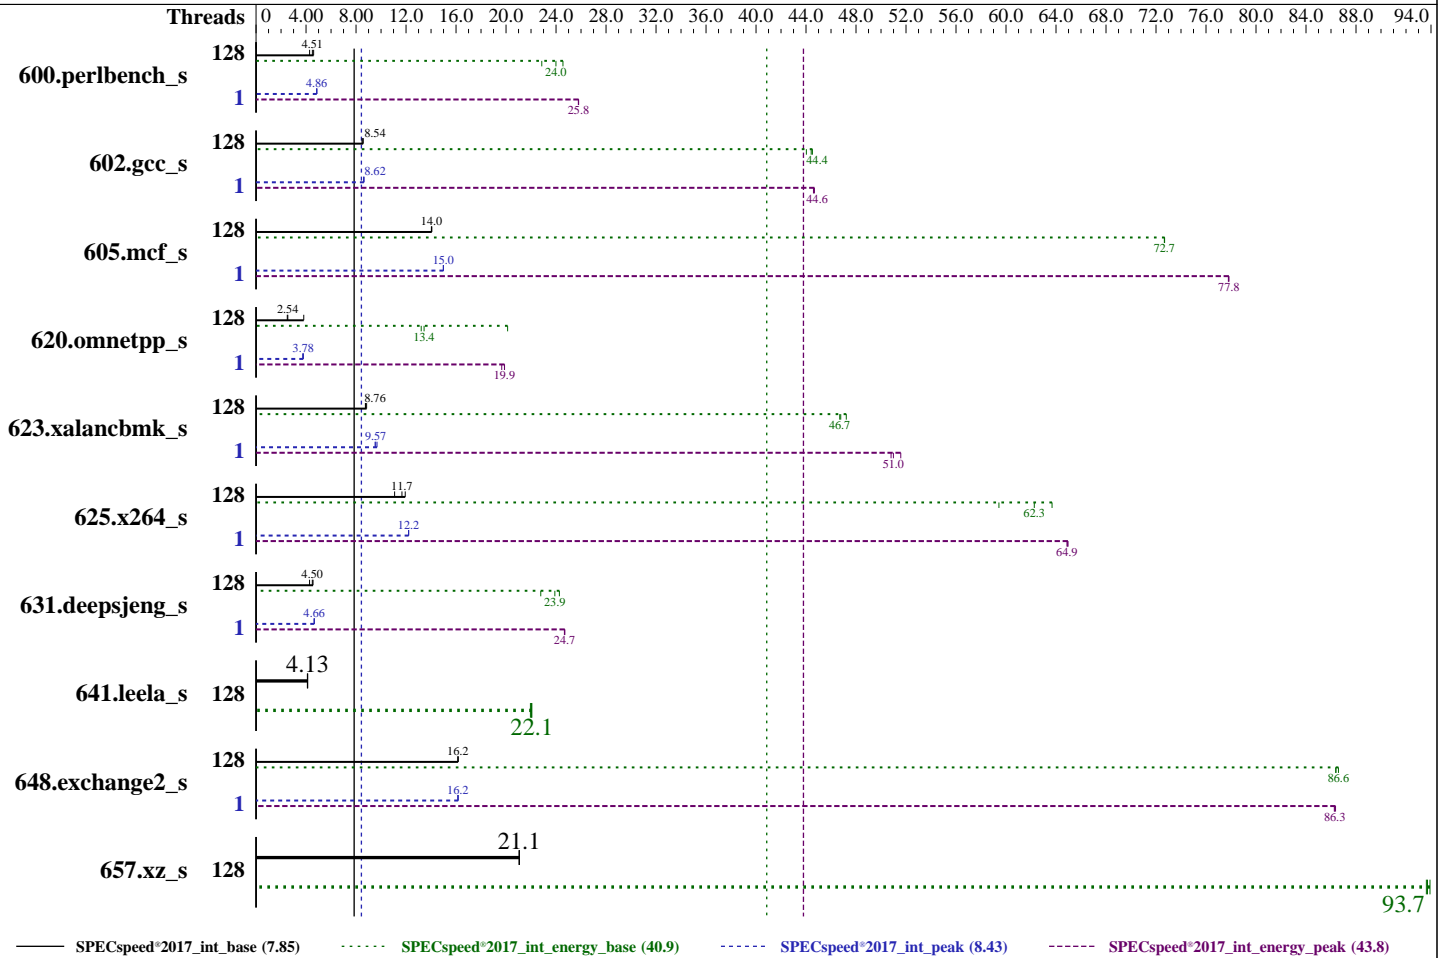

Hardware	Software
CPU Name: AMD EPYC 7702	OS: SUSE Linux Enterprise Server 15 (x86_64) SP1
Max MHz: 3350	Kernel 4.12.14-195-default
Nominal: 2000	Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
Enabled: 128 cores, 2 chips	Parallel: Yes
Orderable: 1, 2 chip(s)	Firmware: HPE BIOS Version A40 07/20/2019 released Aug-2019
Cache L1: 32 KB I + 32 KB D on chip per core	File System: btrfs
L2: 512 KB I+D on chip per core	System State: Run level 3 (multi-user)
L3: 256 MB I+D on chip per chip,	Base Pointers: 64-bit
16 MB shared / 4 cores	Peak Pointers: 32/64-bit
Other: None	Other: jemalloc: jemalloc memory allocator library v5.1.0
Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2933Y-L)	Power Management: Disabled
Storage: 1 x HPE 240 GB SATA 6G M.2 SSD	
Other: None	



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**  
(Test Sponsor: HPE)  
**ProLiant DL385 Gen10**  
**(2.00 GHz, AMD EPYC 7702)**

SPECspeed®2017\_int\_base = 7.85  
SPECspeed®2017\_int\_energy\_base = 40.9  
SPECspeed®2017\_int\_peak = 8.43  
SPECspeed®2017\_int\_energy\_peak = 43.8

CPU2017 License: 003  
Test Sponsor: HPE  
Tested by: HPE

Test Date: May-2019  
Hardware Availability: Oct-2019  
Software Availability: Aug-2019

## Power

Max. Power (W): 586.1  
Idle Power (W): 197.38  
Min. Temperature (C): 23.75  
Elevation (m): 132  
Line Standard: 208 V / 60 Hz / 1 phase / 2 wires  
Provisioning: Line-powered

### Power Settings

Management FW: Version 1.43 of iLO5 released May 23 2019  
Memory Mode: Normal

### Power-Relevant Hardware

Power Supply: 1 x 800 W (non-redundant)  
Details: HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (865438-B21)  
Backplane: None  
Other Storage: Embedded SATA Controller  
Storage Model #: 875488-B21  
NICs Installed: 1 x HPE Ethernet 4-port 331i Adapter @ 1 Gb  
NICs Enabled (FW/OS): 4 / 4  
NICs Connected/Speed: 2 @ 1 Gb  
Other HW Model #: 6 x High Performance Fans (867810-B21)

### Power Analyzer

Power Analyzer: 10.216.1.13:8888  
Hardware Vendor: Yokogawa  
Model: YokogawaWT210  
Serial Number: 91GC21887  
Input Connection: GPIB via NI GIPB-USB-HS  
Metrology Institute: NIST  
Calibration By: TRANSCAT  
Calibration Label: 5-E62NT-80-1  
Calibration Date: 11-Jun-2019  
PTDaemon™ Version: 1.9.1 (a2d19f26; 2019-07-17)  
Setup Description: SUT Power Supply 1 via neoXt NXB 20815  
Current Ranges Used: 1A, 2A, 5A  
Voltage Range Used: 300V

### Temperature Meter

Temperature Meter: 10.216.1.13:8889  
Hardware Vendor: Digi International Inc.  
Model: DigiWATCHPORT\_H  
Serial Number: V45084325  
Input Connection: USB  
PTDaemon Version: 1.9.1 (a2d19f26; 2019-07-17)  
Setup Description: 5 mm in front of SUT main intake

## Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	128	414	4.28	84.2	22.9	203	212	385	4.61	78.4	24.6	204	213	<b>394</b>	<b>4.51</b>	<b>80.3</b>	<b>24.0</b>	<b>204</b>	<b>213</b>
602.gcc_s	128	<b>466</b>	<b>8.54</b>	<b>97.5</b>	<b>44.4</b>	<b>209</b>	<b>235</b>	465	8.57	97.2	44.5	209	235	470	8.48	98.3	44.0	209	237
605.mcf_s	128	337	14.0	70.9	72.7	211	242	<b>336</b>	<b>14.0</b>	<b>70.9</b>	<b>72.7</b>	<b>211</b>	<b>242</b>	336	14.1	70.9	72.7	211	243
620.omnetpp_s	128	<b>642</b>	<b>2.54</b>	<b>132</b>	<b>13.4</b>	<b>206</b>	<b>216</b>	427	3.82	88.2	20.1	206	214	653	2.50	134	13.2	206	214
623.xalancbmk_s	128	162	8.75	32.9	46.8	203	204	160	8.85	32.6	47.2	203	206	<b>162</b>	<b>8.76</b>	<b>33.0</b>	<b>46.7</b>	<b>204</b>	<b>205</b>
625.x264_s	128	148	11.9	30.1	63.7	204	206	159	11.1	32.3	59.4	203	206	<b>151</b>	<b>11.7</b>	<b>30.8</b>	<b>62.3</b>	<b>204</b>	<b>206</b>
631.deepsjeng_s	128	314	4.56	64.2	24.3	204	224	335	4.28	68.4	22.8	204	235	<b>318</b>	<b>4.50</b>	<b>65.2</b>	<b>23.9</b>	<b>205</b>	<b>233</b>
641.leela_s	128	<b>414</b>	<b>4.13</b>	<b>83.7</b>	<b>22.1</b>	<b>202</b>	<b>204</b>	416	4.11	84.2	22.0	203	206	413	4.13	83.8	22.0	203	205
648.exchange2_s	128	<b>182</b>	<b>16.2</b>	<b>36.9</b>	<b>86.6</b>	<b>203</b>	<b>205</b>	182	16.2	37.0	86.4	203	206	182	16.2	37.0	86.4	204	205
657.xz_s	128	294	21.1	71.7	93.9	244	583	<b>294</b>	<b>21.1</b>	<b>71.8</b>	<b>93.7</b>	<b>245</b>	<b>586</b>	293	21.1	71.9	93.6	245	584

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECSpeed®2017\_int\_base = 7.85

SPECSpeed®2017\_int\_energy\_base = 40.9

SPECSpeed®2017\_int\_peak = 8.43

SPECSpeed®2017\_int\_energy\_peak = 43.8

CPU2017 License: 003

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

## Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	1	365	4.86	74.6	25.8	204	214	<b>365</b>	<b>4.86</b>	<b>74.7</b>	<b>25.8</b>	<b>204</b>	<b>215</b>	366	4.85	74.7	25.8	204	214
602.gcc_s	1	462	8.62	97.1	44.6	210	236	462	8.63	96.9	44.7	210	235	<b>462</b>	<b>8.62</b>	<b>97.0</b>	<b>44.6</b>	<b>210</b>	<b>236</b>
605.mcf_s	1	<b>315</b>	<b>15.0</b>	<b>66.2</b>	<b>77.8</b>	<b>210</b>	<b>243</b>	315	15.0	66.2	77.8	210	240	315	15.0	66.2	77.8	210	241
620.omnetpp_s	1	432	3.78	89.3	19.9	207	214	<b>432</b>	<b>3.78</b>	<b>89.3</b>	<b>19.9</b>	<b>207</b>	<b>213</b>	437	3.74	90.3	19.7	207	214
623.xalanbmk_s	1	149	9.52	30.3	50.8	204	205	<b>148</b>	<b>9.57</b>	<b>30.2</b>	<b>51.0</b>	<b>204</b>	<b>206</b>	146	9.68	29.8	51.6	204	205
625.x264_s	1	145	12.2	29.5	65.0	204	206	<b>145</b>	<b>12.2</b>	<b>29.6</b>	<b>64.9</b>	<b>205</b>	<b>207</b>	145	12.2	29.6	64.9	204	206
631.deepsjeng_s	1	308	4.65	63.1	24.7	205	237	308	4.66	63.1	24.7	205	227	<b>308</b>	<b>4.66</b>	<b>63.1</b>	<b>24.7</b>	<b>205</b>	<b>226</b>
641.leela_s	128	<b>414</b>	<b>4.13</b>	<b>83.7</b>	<b>22.1</b>	<b>202</b>	<b>204</b>	416	4.11	84.2	22.0	203	206	413	4.13	83.8	22.0	203	205
648.exchange2_s	1	182	16.2	37.0	86.4	204	205	182	16.1	37.1	86.3	204	205	<b>182</b>	<b>16.2</b>	<b>37.1</b>	<b>86.3</b>	<b>204</b>	<b>206</b>
657.xz_s	128	294	21.1	71.7	93.9	244	583	<b>294</b>	<b>21.1</b>	<b>71.8</b>	<b>93.7</b>	<b>245</b>	<b>586</b>	293	21.1	71.9	93.6	245	584

SPECSpeed®2017\_int\_peak = 8.43

SPECSpeed®2017\_int\_energy\_peak = 43.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

SPECspeed®2017\_int\_peak = 8.43

SPECspeed®2017\_int\_energy\_peak = 43.8

**CPU2017 License:** 003  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Aug-2019

## Operating System Notes (Continued)

The date was incorrectly set for this system. The test date should be Aug-2019.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-127"

LD\_LIBRARY\_PATH =

"/cpu2017/amd\_speed\_aocc200\_rome\_C\_lib/64;/cpu2017/amd\_speed\_aocc200\_rome\_C\_lib/32:"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "128"

Environment variables set by runcpu during the 600.perlbench\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

OMP\_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2\_s peak run:

GOMP\_CPU\_AFFINITY = "0"



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

SPECspeed®2017\_int\_peak = 8.43

SPECspeed®2017\_int\_energy\_peak = 43.8

CPU2017 License: 003

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Submitted\_by: "Bucek, James" <james.bucek@hpe.com>

Submitted: Tue Sep 17 00:02:18 EDT 2019

Submission: cpu2017-20190903-17794.sub

Submitted\_by: "Bucek, James" <james.bucek@hpe.com>

Submitted: Tue Sep 17 09:00:11 EDT 2019

Submission: cpu2017-20190903-17794.sub

## Platform Notes

BIOS Configuration:

AMD SMT Option set to Disabled

Thermal Configuration set to Optimal Cooling

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

NUMA memory domains per socket set to Four memory domains per socket

Last-Level Cache (LLC) as NUMA Node set to Enabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C6 State

Sysinfo program /cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on dl385gen10 Tue May 28 20:09:52 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

SPECspeed®2017\_int\_peak = 8.43

SPECspeed®2017\_int\_energy\_peak = 43.8

CPU2017 License: 003  
Test Sponsor: HPE  
Tested by: HPE

Test Date: May-2019  
Hardware Availability: Oct-2019  
Software Availability: Aug-2019

## Platform Notes (Continued)

```

model name : AMD EPYC 7702 64-Core Processor
  2 "physical id"s (chips)
  128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 64
  siblings  : 64
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63

```

```

From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:    1
Core(s) per socket:    64
Socket(s):             2
NUMA node(s):         8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7702 64-Core Processor
Stepping:              0
CPU MHz:               2000.000
CPU max MHz:           2000.0000
CPU min MHz:           1500.0000
BogoMIPS:              3992.56
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              16384K
NUMA node0 CPU(s):    0-15
NUMA node1 CPU(s):    16-31
NUMA node2 CPU(s):    32-47
NUMA node3 CPU(s):    48-63
NUMA node4 CPU(s):    64-79
NUMA node5 CPU(s):    80-95

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

SPECspeed®2017\_int\_peak = 8.43

SPECspeed®2017\_int\_energy\_peak = 43.8

CPU2017 License: 003  
Test Sponsor: HPE  
Tested by: HPE

Test Date: May-2019  
Hardware Availability: Oct-2019  
Software Availability: Aug-2019

### Platform Notes (Continued)

```

NUMA node6 CPU(s): 96-111
NUMA node7 CPU(s): 112-127
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate ssbd ibrs ibpb stibp vmcall fsgsbase bmi1 avx2 smep bmi2
cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 128802 MB
node 0 free: 128649 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 1 size: 129019 MB
node 1 free: 128879 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
node 2 size: 129019 MB
node 2 free: 128770 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
node 3 size: 128978 MB
node 3 free: 128832 MB
node 4 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79
node 4 size: 129019 MB
node 4 free: 128932 MB
node 5 cpus: 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
node 5 size: 129019 MB
node 5 free: 128935 MB
node 6 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111
node 6 size: 129019 MB
node 6 free: 128934 MB
node 7 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127
node 7 size: 129018 MB
node 7 free: 128933 MB
node distances:

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

SPECspeed®2017\_int\_peak = 8.43

SPECspeed®2017\_int\_energy\_peak = 43.8

**CPU2017 License:** 003  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	32	32	32	32
1:	12	10	12	12	32	32	32	32
2:	12	12	10	12	32	32	32	32
3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

From /proc/meminfo

MemTotal: 1056663620 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:  
NAME="SLES"  
VERSION="15-SP1"  
VERSION\_ID="15.1"  
PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP1"  
ID="sles"  
ID\_LIKE="suse"  
ANSI\_COLOR="0;32"  
CPE\_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:

Linux dl385gen10 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Not affected  
Microarchitectural Data Sampling: Not affected  
CVE-2017-5754 (Meltdown): Not affected  
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS\_FW, STIBP: disabled, RSB filling

run-level 3 May 28 19:22

SPEC is set to: /cpu2017

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**  
(Test Sponsor: HPE)  
**ProLiant DL385 Gen10**  
**(2.00 GHz, AMD EPYC 7702)**

SPECspeed®2017\_int\_base = 7.85  
SPECspeed®2017\_int\_energy\_base = 40.9  
SPECspeed®2017\_int\_peak = 8.43  
SPECspeed®2017\_int\_energy\_peak = 43.8

CPU2017 License: 003  
Test Sponsor: HPE  
Tested by: HPE

Test Date: May-2019  
Hardware Availability: Oct-2019  
Software Availability: Aug-2019

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	222G	43G	178G	20%	/

```
From /sys/devices/virtual/dmi/id
BIOS: HPE A40 07/20/2019
Vendor: HPE
Product: ProLiant DL385 Gen10
Product Family: ProLiant
Serial: 7CE724P4SJ
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x UNKNOWN NOT AVAILABLE  
16x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2933

(End of data from sysinfo program)

## Power Settings Notes

PTDaemon to measure power and temperature was run on a ProLiant DL360 Gen9 as a controller with 2x Intel Xeon E5-2660 v3 CPU and 128 GB of memory using Windows Server 2012 R2. Power management in the OS was disabled by setting Linux CPU governor to performance for all cores: `cpupower frequency-set -r -g performance`  
Power management in the BIOS was default except for any settings mentioned in BIOS Configuration. No power management settings were set in the management firmware. The Embedded SATA controller was the HPE Smart Array S100i SR Gen10 SW RAID. The system was configured with 3 drive cage blanks, 6 High Performance Fans, 16 DIMM blanks, 2 high performance heatsinks (882098-B21) and baffles that fit over the high performance heatsinks in order to produce correct airflow and cooling. The run was started and observed through the management firmware.

## Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**  
(Test Sponsor: HPE)  
**ProLiant DL385 Gen10**  
**(2.00 GHz, AMD EPYC 7702)**

SPECspeed®2017\_int\_base = 7.85  
SPECspeed®2017\_int\_energy\_base = 40.9  
SPECspeed®2017\_int\_peak = 8.43  
SPECspeed®2017\_int\_energy\_peak = 43.8

**CPU2017 License:** 003  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++ | 623.xalancbmk\_s(peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++ | 623.xalancbmk\_s(peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

SPECspeed®2017\_int\_peak = 8.43

SPECspeed®2017\_int\_energy\_peak = 43.8

**CPU2017 License:** 003  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

=====  
Fortran | 648.exchange2\_s(base, peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-flto -Wl,-mllvm -Wl,-function-specialize

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

SPECspeed®2017\_int\_peak = 8.43

SPECspeed®2017\_int\_energy\_peak = 43.8

**CPU2017 License:** 003  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Aug-2019

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks:

```
-Wno-return-type
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

SPECspeed®2017\_int\_peak = 8.43

SPECspeed®2017\_int\_energy\_peak = 43.8

**CPU2017 License:** 003  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Aug-2019

## Base Other Flags (Continued)

Fortran benchmarks:  
-Wno-return-type

## Peak Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Peak Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

SPECspeed®2017\_int\_peak = 8.43

SPECspeed®2017\_int\_energy\_peak = 43.8

CPU2017 License: 003

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

```

-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang

```

602.gcc\_s: -flto -Wl,-mllvm -Wl,-function-specialize

```

-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP
-fopenmp -DUSE_OPENMP -fgnu89-inline -fopenmp=libomp
-lomp -lpthread -ldl -ljemalloc

```

605.mcf\_s: -flto -Wl,-mllvm -Wl,-function-specialize

```

-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang

```

625.x264\_s: Same as 600.perlbench\_s

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen10 (2.00 GHz, AMD EPYC 7702)

SPECspeed®2017\_int\_base = 7.85

SPECspeed®2017\_int\_energy\_base = 40.9

SPECspeed®2017\_int\_peak = 8.43

SPECspeed®2017\_int\_energy\_peak = 43.8

**CPU2017 License:** 003  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Aug-2019

## Peak Optimization Flags (Continued)

657.xz\_s: basepeak = yes

C++ benchmarks:

```
620.omnetpp_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

```
623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: basepeak = yes

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**  
(Test Sponsor: HPE)  
**ProLiant DL385 Gen10**  
**(2.00 GHz, AMD EPYC 7702)**

SPECspeed®2017\_int\_base = 7.85  
SPECspeed®2017\_int\_energy\_base = 40.9  
SPECspeed®2017\_int\_peak = 8.43  
SPECspeed®2017\_int\_energy\_peak = 43.8

**CPU2017 License:** 003  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Aug-2019

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):  
-lflang

## Peak Other Flags

C benchmarks:  
-Wno-return-type

C++ benchmarks (except as noted below):  
-Wno-return-type

623.xalancbmk\_s: -Wno-return-type  
-L/sppo/dev/cpu2017/v110/amd\_speed\_aocc200\_rome\_C\_lib/32

Fortran benchmarks:  
-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.html>  
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.xml>  
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revF.xml>

PTDaemon, SPEC CPU, and SPECspeed are trademarks or registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-05-28 21:09:48-0400.  
Report generated on 2019-09-17 16:18:03 by CPU2017 PDF formatter v6255.  
Originally published on 2019-09-17.