



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017\_fp\_base = 117

eterio 215 RE1 (Intel Xeon Silver 4210, 2.20 GHz)

SPECrate®2017\_fp\_peak = 118

CPU2017 License: 9081


Test Date: Sep-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

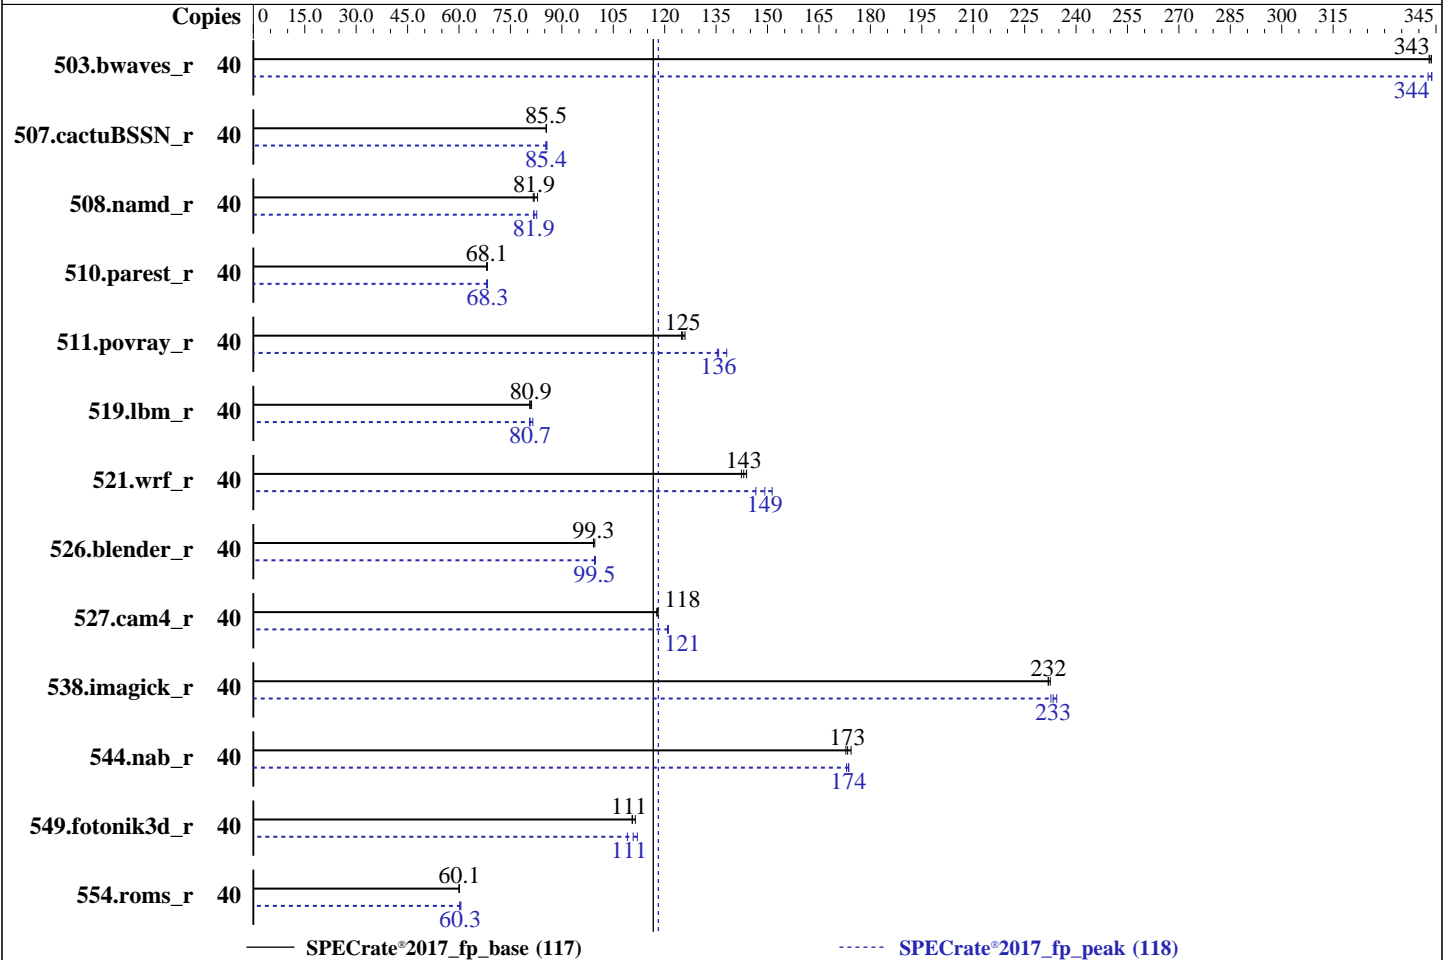

## Hardware

CPU Name: Intel Xeon Silver 4210  
 Max MHz: 3200  
 Nominal: 2200  
 Enabled: 20 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 13.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)  
 Storage: 1 x 960 GB SSD SATA III  
 Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 3.10.0-693.21.1.el7.x86\_64  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux  
 Parallel: No  
 Firmware: Version BIOS 3.1 released Apr-2019  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 215 RE1 (Intel Xeon Silver 4210, 2.20 GHz)

SPECrate®2017\_fp\_base = 117  
SPECrate®2017\_fp\_peak = 118

CPU2017 License: 9081  
Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa  
Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2019  
Hardware Availability: Apr-2019  
Software Availability: Nov-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	40	<b>1169</b>	<b>343</b>	1167	344	1169	343	40	<b>1167</b>	<b>344</b>	1170	343	1167	344
507.cactuBSSN_r	40	592	85.5	<b>592</b>	<b>85.5</b>	593	85.4	40	<b>593</b>	<b>85.4</b>	591	85.7	593	85.3
508.namd_r	40	<b>464</b>	<b>81.9</b>	465	81.7	458	82.9	40	465	81.8	<b>464</b>	<b>81.9</b>	460	82.7
510.parest_r	40	<b>1536</b>	<b>68.1</b>	1533	68.2	1536	68.1	40	<b>1533</b>	<b>68.3</b>	1537	68.1	1532	68.3
511.povray_r	40	<b>746</b>	<b>125</b>	748	125	742	126	40	690	135	676	138	<b>688</b>	<b>136</b>
519.lbm_r	40	523	80.6	<b>521</b>	<b>80.9</b>	519	81.2	40	<b>522</b>	<b>80.7</b>	523	80.6	517	81.5
521.wrf_r	40	<b>626</b>	<b>143</b>	629	142	623	144	40	592	151	611	147	<b>600</b>	<b>149</b>
526.blender_r	40	614	99.2	<b>614</b>	<b>99.3</b>	612	99.6	40	612	99.5	<b>612</b>	<b>99.5</b>	610	99.8
527.cam4_r	40	592	118	594	118	<b>594</b>	<b>118</b>	40	578	121	579	121	<b>578</b>	<b>121</b>
538.imagick_r	40	429	232	428	232	<b>429</b>	<b>232</b>	40	428	233	424	234	<b>426</b>	<b>233</b>
544.nab_r	40	389	173	386	174	<b>388</b>	<b>173</b>	40	389	173	388	174	<b>388</b>	<b>174</b>
549.fotonik3d_r	40	<b>1409</b>	<b>111</b>	1399	111	1411	110	40	1428	109	<b>1407</b>	<b>111</b>	1392	112
554.roms_r	40	<b>1058</b>	<b>60.1</b>	1058	60.1	1060	60.0	40	1056	60.2	<b>1054</b>	<b>60.3</b>	1050	60.6

SPECrate®2017\_fp\_base = 117

SPECrate®2017\_fp\_peak = 118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2017.1.5-for-Supermicro/lib/ia32:/cpu2017.1.5-for-Supermicro/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017\_fp\_base = 117

eterio 215 RE1 (Intel Xeon Silver 4210, 2.20 GHz)

SPECrate®2017\_fp\_peak = 118

CPU2017 License: 9081

Test Date: Sep-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

## General Notes (Continued)

Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
 sync; echo 3> /proc/sys/vm/drop\_caches  
 runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

## Platform Notes

BIOS Settings:  
 Power Technology = Custom  
 Turbo Mode = Enable  
 Enhanced Halt State (C1E) = Disable  
 CPU C6 report = Disabled  
 Package C State = No limit  
 Software Controlled T-States = Disable  
 Hyper-Threading (All) = Enable  
 Enforce POR = Disable  
 Memory Frequency = 2400  
 Patrol Scrub = Disabled  
 IMC Interleaving = Auto  
 SNC = Disabled

Sysinfo program /cpu2017.1.5-for-Supermicro/bin/sysinfo  
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
 running on SUT Sat Sep 14 04:21:12 2019

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Xeon(R) Silver 4210 CPU @ 2.20GHz  
 2 "physical id"s (chips)  
 40 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following  
 excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 10  
 siblings : 20  
 physical 0: cores 0 1 2 3 4 8 9 10 11 12  
 physical 1: cores 0 1 2 3 4 8 9 10 11 12

From lscpu:  
 Architecture: x86\_64  
 CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017\_fp\_base = 117

eterio 215 RE1 (Intel Xeon Silver 4210, 2.20 GHz)

SPECrate®2017\_fp\_peak = 118

CPU2017 License: 9081

Test Date: Sep-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

## Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    40
On-line CPU(s) list:      0-39
Thread(s) per core:       2
Core(s) per socket:      10
Socket(s):                 2
NUMA node(s):             2
Vendor ID:                 GenuineIntel
CPU family:                6
Model:                     85
Model name:                Intel(R) Xeon(R) Silver 4210 CPU @ 2.20GHz
Stepping:                  7
CPU MHz:                   2201.000
CPU max MHz:               2201.0000
CPU min MHz:               1000.0000
BogoMIPS:                  4400.00
Virtualization:            VT-x
L1d cache:                 32K
L1i cache:                 32K
L2 cache:                  1024K
L3 cache:                  14080K
NUMA node0 CPU(s):        0-9,20-29
NUMA node1 CPU(s):        10-19,30-39
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts

```

```

/proc/cpuinfo cache data
cache size : 14080 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
node 0 size: 195240 MB
node 0 free: 177814 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
node 1 size: 196608 MB
node 1 free: 182765 MB
node distances:

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017\_fp\_base = 117

eterio 215 RE1 (Intel Xeon Silver 4210, 2.20 GHz)

SPECrate®2017\_fp\_peak = 118

CPU2017 License: 9081

Test Date: Sep-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

## Platform Notes (Continued)

```
node    0    1
0:     10   21
1:     21   10
```

From /proc/meminfo

```
MemTotal:      394649008 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

uname -a:

```
Linux SUT 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):      Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)
```

run-level 3 Sep 13 18:50

SPEC is set to: /cpu2017.1.5-for-Supermicro

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  825G  119G  665G  16% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.1 04/30/2019

Memory:

12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2400

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 215 RE1 (Intel Xeon Silver 4210, 2.20 GHz)

SPECrate®2017\_fp\_base = 117  
SPECrate®2017\_fp\_peak = 118

**CPU2017 License:** 9081  
**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa  
**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Sep-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Nov-2018

## Platform Notes (Continued)

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
544.nab\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017\_fp\_base = 117

eterio 215 RE1 (Intel Xeon Silver 4210, 2.20 GHz)

SPECrate®2017\_fp\_peak = 118

CPU2017 License: 9081

Test Date: Sep-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

## Compiler Version Notes (Continued)

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
=====

```

```

-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran, C       | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

```

```

-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

```

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017\_fp\_base = 117

eterio 215 RE1 (Intel Xeon Silver 4210, 2.20 GHz)

SPECrate®2017\_fp\_peak = 118

**CPU2017 License:** 9081

**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa

**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Sep-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Nov-2018

## Base Portability Flags (Continued)

507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64  
 510.parest\_r: -DSPEC\_LP64  
 511.povray\_r: -DSPEC\_LP64  
 519.lbm\_r: -DSPEC\_LP64  
 521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
 526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
 527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
 538.imagick\_r: -DSPEC\_LP64  
 544.nab\_r: -DSPEC\_LP64  
 549.fotonik3d\_r: -DSPEC\_LP64  
 554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
 -ffinite-math-only -qopt-mem-layout-trans=4

### C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
 -ffinite-math-only -qopt-mem-layout-trans=4

### Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
 -ffinite-math-only -qopt-mem-layout-trans=4 -auto  
 -nonstandard-realloc-lhs -align array32byte

### Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
 -ffinite-math-only -qopt-mem-layout-trans=4 -auto  
 -nonstandard-realloc-lhs -align array32byte

### Benchmarks using both C and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
 -ffinite-math-only -qopt-mem-layout-trans=4

### Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
 -ffinite-math-only -qopt-mem-layout-trans=4 -auto  
 -nonstandard-realloc-lhs -align array32byte





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017\_fp\_base = 117

eterio 215 RE1 (Intel Xeon Silver 4210, 2.20 GHz)

SPECrate®2017\_fp\_peak = 118

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

```
544.nab_r: Same as 538.imagick_r
```

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017\_fp\_base = 117

eterio 215 RE1 (Intel Xeon Silver 4210, 2.20 GHz)

SPECrate®2017\_fp\_peak = 118

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

## Peak Optimization Flags (Continued)

510.parest\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both C and C++:

511.povray\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

526.blender\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-08-06.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.2019-10-01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-08-06.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.2019-10-01.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017\_fp\_base = 117

eterio 215 RE1 (Intel Xeon Silver 4210, 2.20 GHz)

SPECrate®2017\_fp\_peak = 118

**CPU2017 License:** 9081

**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa

**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Sep-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Nov-2018

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-13 22:21:11-0400.

Report generated on 2019-10-01 14:14:20 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.