



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(3.00 GHz, AMD EPYC 7302)

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

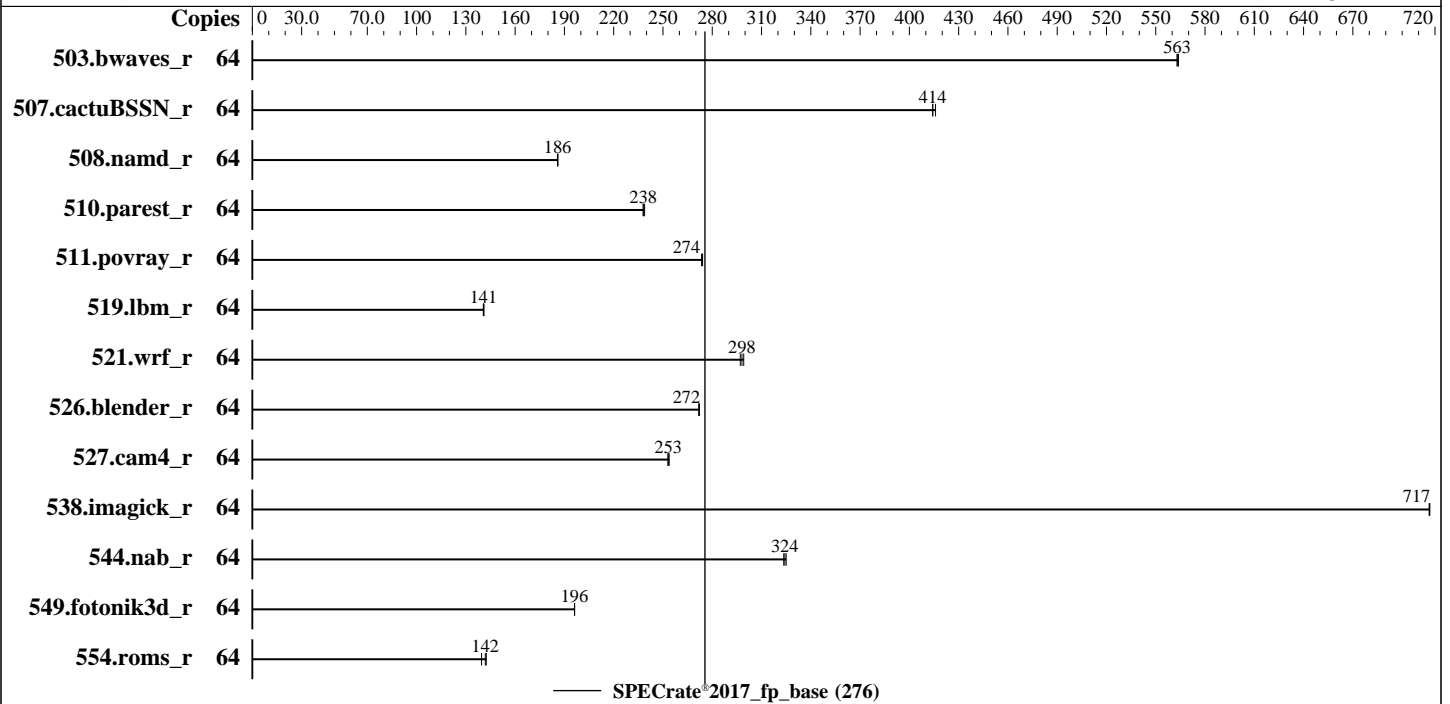

Hardware

CPU Name: AMD EPYC 7302
 Max MHz: 3300
 Nominal: 3000
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip,
 16 MB shared / 2 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 400 GB SAS SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64) SP1
 Kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: HPE BIOS Version A40 07/20/2019 released Aug-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library V5.2.0;
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(3.00 GHz, AMD EPYC 7302)

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	1138	564	1140	563	1140	563							
507.cactuBSSN_r	64	195	416	196	414	196	414							
508.namd_r	64	327	186	327	186	327	186							
510.parest_r	64	701	239	704	238	703	238							
511.povray_r	64	545	274	546	274	546	274							
519.lbm_r	64	478	141	479	141	480	141							
521.wrf_r	64	481	298	479	299	483	297							
526.blender_r	64	358	272	359	272	358	272							
527.cam4_r	64	441	254	442	253	442	253							
538.imagick_r	64	222	716	222	717	222	717							
544.nab_r	64	331	325	332	324	333	324							
549.fotonik3d_r	64	1271	196	1272	196	1271	196							
554.roms_r	64	717	142	714	142	729	140							

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(3.00 GHz, AMD EPYC 7302)

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Operating System Notes (Continued)

sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017_A2/amd_rate_aocc200_rome_A_lib/64;
/home/cpu2017_A2/amd_rate_aocc200_rome_A_lib/32:"
MALLOC_CONF = "retain:true"

Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC 9.1.0 in Ubuntu 19.04

with flags: -Ofast -march=znver2. jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS Configuration

Thermal Configuration set to Maximum Cooling

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Minimum Processor Idle Power core C-State set to C6 State

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Throughput Compute

NUMA memory domains per socket set to Four memory domains per socket

Sysinfo program /home/cpu2017_A2/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on dl385-gen10-rome-64c Sat Feb 16 06:50:58 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7302 16-Core Processor

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(3.00 GHz, AMD EPYC 7302)

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
2 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          48 bits physical, 48 bits virtual
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7302 16-Core Processor
Stepping:               0
CPU MHz:                3000.000
CPU max MHz:            3000.0000
CPU min MHz:            1500.0000
BogoMIPS:               5988.40
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0-3,32-35
NUMA node1 CPU(s):     4-7,36-39
NUMA node2 CPU(s):     8-11,40-43
NUMA node3 CPU(s):     12-15,44-47
NUMA node4 CPU(s):     16-19,48-51
NUMA node5 CPU(s):     20-23,52-55
NUMA node6 CPU(s):     24-27,56-59
NUMA node7 CPU(s):     28-31,60-63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(3.00 GHz, AMD EPYC 7302)

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 64219 MB
node 0 free: 64054 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 64509 MB
node 1 free: 64363 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 64509 MB
node 2 free: 64362 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 64497 MB
node 3 free: 64368 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 64480 MB
node 4 free: 64322 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 64509 MB
node 5 free: 64370 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 64509 MB
node 6 free: 64366 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 64298 MB
node 7 free: 64166 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 12 12 12 32 32 32 32
 1:  12 10 12 12 32 32 32 32
 2:  12 12 10 12 32 32 32 32
 3:  12 12 12 10 32 32 32 32
 4:  32 32 32 32 10 12 12 12
 5:  32 32 32 32 12 10 12 12
 6:  32 32 32 32 12 12 10 12
 7:  32 32 32 32 12 12 12 10
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(3.00 GHz, AMD EPYC 7302)

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      527908340 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux dl385-gen10-rome-64c 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019
(8fba516) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: conditional, RSB filling
```

run-level 3 Feb 14 08:21

SPEC is set to: /home/cpu2017_A2

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        btrfs    371G   52G  318G  14% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE A40 07/20/2019

Memory:

```
16x UNKNOWN NOT AVAILABLE
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933
```

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(3.00 GHz, AMD EPYC 7302)

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
=====

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
=====

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(3.00 GHz, AMD EPYC 7302)

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(3.00 GHz, AMD EPYC 7302)

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-flt0 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang

```

C++ benchmarks:

```

-std=c++98 -flt0 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(3.00 GHz, AMD EPYC 7302)

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(3.00 GHz, AMD EPYC 7302)

SPECrate®2017_fp_base = 276

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-02-16 07:50:57-0500.

Report generated on 2019-10-02 12:04:21 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.