



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 6238, 2.10GHz

SPECrate®2017_fp_base = 448

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: Apr-2019

Software Availability: Feb-2019

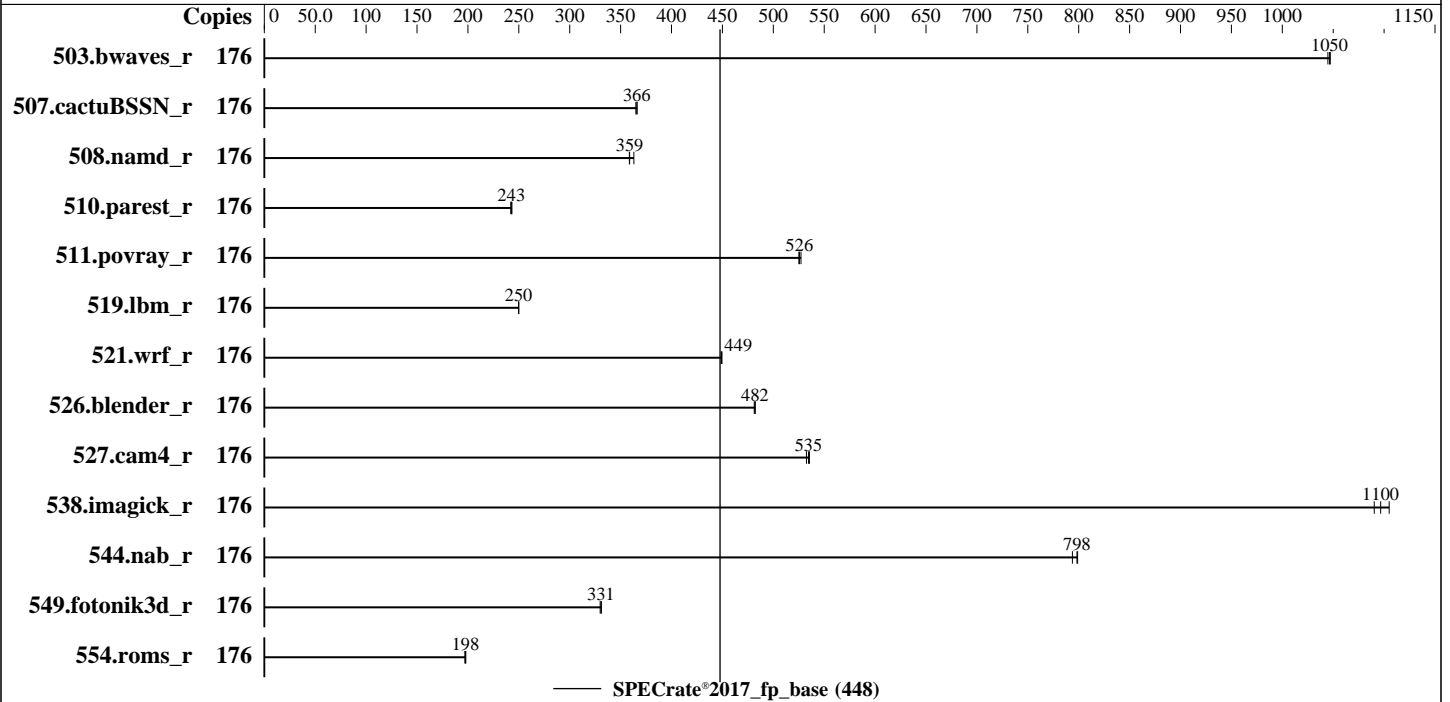

Hardware

CPU Name: Intel Xeon Gold 6238
 Max MHz: 3700
 Nominal: 2100
 Enabled: 88 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 30.25 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x SATA M.2 SSD, 480 GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 4.12.14-25.28-default
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Fujitsu BIOS for D3753-C1x Version V5.0.0.14 R1.8.0 released Jun-2019
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 6238, 2.10GHz

SPECrate®2017_fp_base = 448

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	176	1689	1040	1685	1050	1687	1050							
507.cactuBSSN_r	176	609	366	609	366	611	365							
508.namd_r	176	466	359	466	359	461	363							
510.parest_r	176	1893	243	1902	242	1897	243							
511.povray_r	176	782	526	780	527	783	525							
519.lbm_r	176	743	250	742	250	742	250							
521.wrf_r	176	877	450	878	449	878	449							
526.blender_r	176	557	481	556	482	556	482							
527.cam4_r	176	576	535	575	535	578	533							
538.imagick_r	176	396	1100	401	1090	399	1100							
544.nab_r	176	371	799	373	794	371	798							
549.fotonik3d_r	176	2072	331	2079	330	2073	331							
554.roms_r	176	1415	198	1413	198	1420	197							

SPECrate®2017_fp_base = 448

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-175
Process tuning settings:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-fp/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 6238, 2.10GHz

SPECrate®2017_fp_base = 448

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Fan Control = Full

HWPM = Native Mode with no legacy

LLC Dead Line Alloc = Disabled

LLC Prefetcher = Disabled

Local/Remote Threshold = Disable

Patrol Scrub = Disabled

WR CRC feature Control = Disabled

XPT Prefetch = Disabled

Sysinfo program /home/Benchmark/speccpu2017-fp/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-z2gf Thu Jun 21 06:35:40 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6238 CPU @ 2.10GHz

4 "physical id"s (chips)

176 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 22

siblings : 44

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 176

On-line CPU(s) list: 0-175

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 6238, 2.10GHz

SPECrate®2017_fp_base = 448

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 22
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6238 CPU @ 2.10GHz
Stepping: 7
CPU MHz: 2100.000
CPU max MHz: 3700.0000
CPU min MHz: 1000.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 30976K
NUMA node0 CPU(s): 0-2,6-8,11-13,17,18,88-90,94-96,99-101,105,106
NUMA node1 CPU(s): 3-5,9,10,14-16,19-21,91-93,97,98,102-104,107-109
NUMA node2 CPU(s): 22-24,28-30,33-35,39,40,110-112,116-118,121-123,127,128
NUMA node3 CPU(s): 25-27,31,32,36-38,41-43,113-115,119,120,124-126,129-131
NUMA node4 CPU(s): 44-46,50-52,55-57,61,62,132-134,138-140,143-145,149,150
NUMA node5 CPU(s): 47-49,53,54,58-60,63-65,135-137,141,142,146-148,151-153
NUMA node6 CPU(s): 66-68,72-74,77-79,83,84,154-156,160-162,165-167,171,172
NUMA node7 CPU(s): 69-71,75,76,80-82,85-87,157-159,163,164,168-170,173-175
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 30976 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 11 12 13 17 18 88 89 90 94 95 96 99 100 101 105 106
node 0 size: 191883 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 6238, 2.10GHz

SPECrate®2017_fp_base = 448

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```

node 0 free: 188468 MB
node 1 cpus: 3 4 5 9 10 14 15 16 19 20 21 91 92 93 97 98 102 103 104 107 108 109
node 1 size: 193531 MB
node 1 free: 192853 MB
node 2 cpus: 22 23 24 28 29 30 33 34 35 39 40 110 111 112 116 117 118 121 122 123 127
128
node 2 size: 193531 MB
node 2 free: 193330 MB
node 3 cpus: 25 26 27 31 32 36 37 38 41 42 43 113 114 115 119 120 124 125 126 129 130
131
node 3 size: 193531 MB
node 3 free: 193320 MB
node 4 cpus: 44 45 46 50 51 52 55 56 57 61 62 132 133 134 138 139 140 143 144 145 149
150
node 4 size: 193502 MB
node 4 free: 193298 MB
node 5 cpus: 47 48 49 53 54 58 59 60 63 64 65 135 136 137 141 142 146 147 148 151 152
153
node 5 size: 193531 MB
node 5 free: 193288 MB
node 6 cpus: 66 67 68 72 73 74 77 78 79 83 84 154 155 156 160 161 162 165 166 167 171
172
node 6 size: 193531 MB
node 6 free: 193309 MB
node 7 cpus: 69 70 71 75 76 80 81 82 85 86 87 157 158 159 163 164 168 169 170 173 174
175
node 7 size: 193312 MB
node 7 free: 193107 MB
node distances:
node   0   1   2   3   4   5   6   7
  0:  10  11  21  21  21  21  21  21
  1:  11  10  21  21  21  21  21  21
  2:  21  21  10  11  21  21  21  21
  3:  21  21  11  10  21  21  21  21
  4:  21  21  21  21  10  11  21  21
  5:  21  21  21  21  11  10  21  21
  6:  21  21  21  21  21  21  10  11
  7:  21  21  21  21  21  21  11  10

```

```

From /proc/meminfo
MemTotal:      1583469544 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 6238, 2.10GHz

SPECrate®2017_fp_base = 448

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```
VERSION="15"  
VERSION_ID="15"  
PRETTY_NAME="SUSE Linux Enterprise Server 15"  
ID="sles"  
ID_LIKE="suse"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:  
Linux linux-z2gf 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected  
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
```

```
run-level 3 Jun 21 06:33
```

```
SPEC is set to: /home/Benchmark/speccpu2017-fp  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 btrfs 445G 35G 409G 8% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.8.0 for D3753-C1x  
06/06/2019
```

```
Memory:  
33x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934  
15x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)  
-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 6238, 2.10GHz

SPECrate®2017_fp_base = 448

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 6238,
2.10GHz

SPECrate®2017_fp_base = 448

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 6238,
2.10GHz

SPECrate®2017_fp_base = 448

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2018-06-20 17:35:39-0400.

Report generated on 2019-10-01 14:31:57 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.