



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Platinum 8256,
3.80GHz

SPECrate®2017_int_base = 253

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

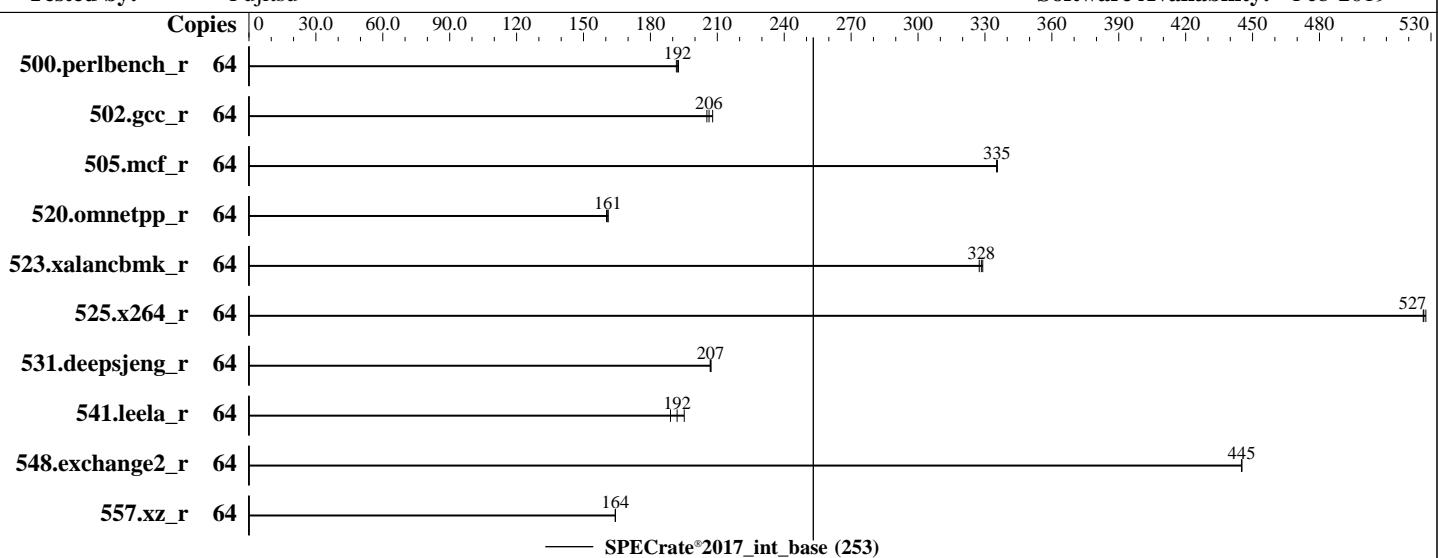

Hardware

CPU Name: Intel Xeon Platinum 8256
Max MHz: 3900
Nominal: 3800
Enabled: 32 cores, 8 chips, 2 threads/core
Orderable: 2,4,6,8 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 16.5 MB I+D on chip per chip
Other: None
Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2933Y-R)
Storage: 1 x SAS HDD, 600GB, 10.5K RPM, SAS HDD
Other: None

Software

OS: SUSE Linux Enterprise Server 15
4.12.14-25.28-default
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
Compiler for Linux;
Fortran: Version 19.0.1.144 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: PRIMEQUEST 3800E2 Unified Firmware
Version PB19043, Released Jun-2019
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: --



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Platinum 8256,
3.80GHz

SPECrate®2017_int_base = 253

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	529	193	530	192	532	192									
502.gcc_r	64	436	208	439	206	441	205									
505.mcf_r	64	308	336	308	335	308	335									
520.omnetpp_r	64	522	161	521	161	524	160									
523.xalancbmk_r	64	206	327	206	328	205	329									
525.x264_r	64	213	527	213	527	212	528									
531.deepsjeng_r	64	355	207	354	207	354	207									
541.leela_r	64	543	195	561	189	552	192									
548.exchange2_r	64	377	445	377	445	377	445									
557.xz_r	64	421	164	421	164	421	164									

SPECrate®2017_int_base = 253

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-63

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-int/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Platinum 8256,
3.80GHz

SPECrate®2017_int_base = 253

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

```
DCU Streamer Prefetcher = Disabled
DDR4 Write Data CRC Protection = Disabled
HWP Support = Native Mode with no legacy
Stale AtoS = Enabled
Sub Numa Clustering = Enabled
Uncore Frequency Scaling = Disabled
UPI Link L0p = Disabled
XPT Prefetch = Enabled
Fan Control = Full
Sysinfo program /home/Benchmark/speccpu2017-int/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-8r5c Mon Jul  8 20:06:14 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz
  8 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 4
  siblings : 8
  physical 0: cores 1 2 4 13
  physical 1: cores 4 8 9 13
  physical 2: cores 1 2 5 13
  physical 3: cores 1 2 5 13
  physical 4: cores 1 2 4 13
  physical 5: cores 2 9 12 13
  physical 6: cores 1 2 5 13
  physical 7: cores 3 8 9 13
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:  0-63
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Platinum 8256,
3.80GHz

SPECrate®2017_int_base = 253

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Jul-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

Thread(s) per core: 2
Core(s) per socket: 4
Socket(s): 8
NUMA node(s): 16
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz
Stepping: 6
CPU MHz: 3800.000
CPU max MHz: 3900.0000
CPU min MHz: 1200.0000
BogoMIPS: 7600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0,1,32,33
NUMA node1 CPU(s): 2,3,34,35
NUMA node2 CPU(s): 4,7,36,39
NUMA node3 CPU(s): 5,6,37,38
NUMA node4 CPU(s): 8,9,40,41
NUMA node5 CPU(s): 10,11,42,43
NUMA node6 CPU(s): 12,13,44,45
NUMA node7 CPU(s): 14,15,46,47
NUMA node8 CPU(s): 16,17,48,49
NUMA node9 CPU(s): 18,19,50,51
NUMA node10 CPU(s): 20,21,52,53
NUMA node11 CPU(s): 22,23,54,55
NUMA node12 CPU(s): 24,25,56,57
NUMA node13 CPU(s): 26,27,58,59
NUMA node14 CPU(s): 28,31,60,63
NUMA node15 CPU(s): 29,30,61,62
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpn rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni flush_l1d arch_capabilities

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Platinum 8256,
3.80GHz

SPECrate®2017_int_base = 253

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

```
/proc/cpuinfo cache data  
cache size : 16896 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a  
physical chip.
```

```
available: 16 nodes (0-15)  
node 0 cpus: 0 1 32 33  
node 0 size: 192271 MB  
node 0 free: 192073 MB  
node 1 cpus: 2 3 34 35  
node 1 size: 193532 MB  
node 1 free: 193392 MB  
node 2 cpus: 4 7 36 39  
node 2 size: 193532 MB  
node 2 free: 193394 MB  
node 3 cpus: 5 6 37 38  
node 3 size: 193503 MB  
node 3 free: 193350 MB  
node 4 cpus: 8 9 40 41  
node 4 size: 193532 MB  
node 4 free: 193394 MB  
node 5 cpus: 10 11 42 43  
node 5 size: 193532 MB  
node 5 free: 193397 MB  
node 6 cpus: 12 13 44 45  
node 6 size: 193532 MB  
node 6 free: 193403 MB  
node 7 cpus: 14 15 46 47  
node 7 size: 193532 MB  
node 7 free: 193407 MB  
node 8 cpus: 16 17 48 49  
node 8 size: 193532 MB  
node 8 free: 193386 MB  
node 9 cpus: 18 19 50 51  
node 9 size: 193532 MB  
node 9 free: 193136 MB  
node 10 cpus: 20 21 52 53  
node 10 size: 193532 MB  
node 10 free: 193390 MB  
node 11 cpus: 22 23 54 55  
node 11 size: 193532 MB  
node 11 free: 193404 MB  
node 12 cpus: 24 25 56 57  
node 12 size: 193532 MB  
node 12 free: 193284 MB  
node 13 cpus: 26 27 58 59  
node 13 size: 193532 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Platinum 8256,
3.80GHz

SPECrate®2017_int_base = 253

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Jul-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

```
node 13 free: 193393 MB
node 14 cpus: 28 31 60 63
node 14 size: 193331 MB
node 14 free: 193207 MB
node 15 cpus: 29 30 61 62
node 15 size: 193532 MB
node 15 free: 193408 MB
node distances:
```

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	20	20	20	20	28	28	28	28	28	28	20	20	28	28
1:	11	10	20	20	20	20	28	28	28	28	28	28	20	20	28	28
2:	20	20	10	11	28	28	20	20	28	28	20	20	28	28	28	28
3:	20	20	11	10	28	28	20	20	28	28	20	20	28	28	28	28
4:	20	20	28	28	10	11	20	20	20	20	28	28	28	28	28	28
5:	20	20	28	28	11	10	20	20	20	20	28	28	28	28	28	28
6:	28	28	20	20	20	20	10	11	28	28	28	28	28	28	20	20
7:	28	28	20	20	20	20	11	10	28	28	28	28	28	28	20	20
8:	28	28	28	28	20	20	28	28	10	11	20	20	20	20	28	28
9:	28	28	28	28	20	20	28	28	11	10	20	20	20	20	28	28
10:	28	28	20	20	28	28	28	28	20	20	10	11	28	28	20	20
11:	28	28	20	20	28	28	28	28	20	20	11	10	28	28	20	20
12:	20	20	28	28	28	28	28	28	20	20	28	28	10	11	20	20
13:	20	20	28	28	28	28	28	28	20	20	28	28	11	10	20	20
14:	28	28	28	28	28	28	20	20	28	28	20	20	20	20	10	11
15:	28	28	28	28	28	28	20	20	28	28	20	20	20	20	11	10

From /proc/meminfo

```
MemTotal:      3169312984 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="SLES"
  VERSION="15"
  VERSION_ID="15"
  PRETTY_NAME="SUSE Linux Enterprise Server 15"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux linux-8r5c 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Platinum 8256,
3.80GHz

SPECrate®2017_int_base = 253

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Jul-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Jul 8 20:04

SPEC is set to: /home/Benchmark/speccpu2017-int

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	142G	35G	107G	25%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU V1.0.0.0 R1.16.0 for D3858-B1x 04/24/2019

Memory:

68x	Micron	36ASF4G72PZ-2G9E2	32 GB	2 rank	2933
28x	Samsung	M393A4K40CB2-CVF	32 GB	2 rank	2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C	500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
	525.x264_r(base) 557.xz_r(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

C++	520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
	541.leela_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

Fortran	548.exchange2_r(base)
---------	-----------------------

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Platinum 8256,
3.80GHz

SPECrate®2017_int_base = 253

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Platinum 8256,
3.80GHz

SPECrate®2017_int_base = 253

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lqkmalloc

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-07-08 07:06:13-0400.

Report generated on 2019-10-15 14:44:38 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-15.