



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2295)

SPECSpeed®2017_int_base = 11.9

SPECSpeed®2017_int_peak = 12.2

CPU2017 License: 001176


Test Date: Sep-2019

Test Sponsor: Supermicro

Hardware Availability: Oct-2019

Tested by: Supermicro

Software Availability: Aug-2019

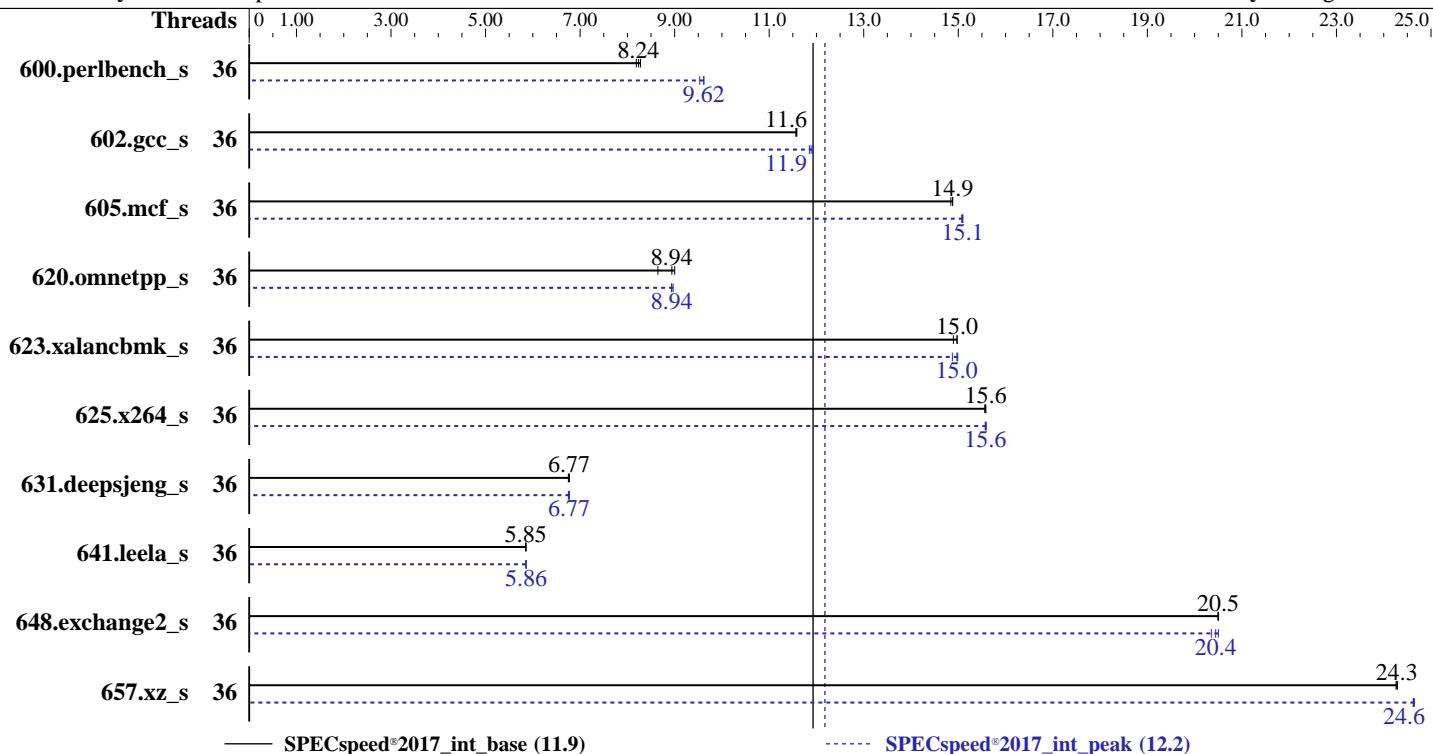

Hardware

CPU Name: Intel Xeon W-2295
 Max MHz: 4600
 Nominal: 3000
 Enabled: 18 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 128 GB (4 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
 Storage: 1 x 2 TB SATA III, 7200 RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
 Compiler: Kernel 4.12.14-95.29-default
 C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Version 2.0 released Sep-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: --



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2295)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 001176

Test Date: Sep-2019

Test Sponsor: Supermicro

Hardware Availability: Oct-2019

Tested by: Supermicro

Software Availability: Aug-2019

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	36	217	8.19	215	8.24	214	8.28	36	185	9.62	186	9.53	185	9.62		
602.gcc_s	36	344	11.6	344	11.6	344	11.6	36	334	11.9	335	11.9	336	11.8		
605.mcf_s	36	317	14.9	318	14.8	317	14.9	36	313	15.1	313	15.1	313	15.1		
620.omnetpp_s	36	182	8.94	181	9.00	189	8.65	36	183	8.93	182	8.94	182	8.97		
623.xalancbmk_s	36	95.1	14.9	94.6	15.0	94.6	15.0	36	94.5	15.0	95.3	14.9	94.7	15.0		
625.x264_s	36	113	15.6	113	15.6	113	15.6	36	113	15.6	113	15.6	113	15.6		
631.deepsjeng_s	36	212	6.77	212	6.75	212	6.77	36	212	6.77	212	6.75	212	6.77		
641.leela_s	36	291	5.86	292	5.85	291	5.85	36	291	5.86	291	5.86	291	5.85		
648.exchange2_s	36	143	20.5	143	20.5	143	20.5	36	144	20.4	144	20.4	143	20.5		
657.xz_s	36	255	24.3	255	24.3	255	24.3	36	251	24.6	251	24.6	251	24.6		
SPECspeed®2017_int_base = 11.9								SPECspeed®2017_int_peak = 12.2								

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2295)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Sep-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on linux Sun Sep 22 11:44:36 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) W-2295 CPU @ 3.00GHz
        1 "physical id"s (chips)
        36 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
        cpu cores : 18
        siblings : 36
        physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

```
From lscpu:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                36
On-line CPU(s) list:   0-35
Thread(s) per core:    2
Core(s) per socket:    18
Socket(s):              1
NUMA node(s):           1
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) W-2295 CPU @ 3.00GHz
Stepping:               7
CPU MHz:                3000.000
CPU max MHz:            4800.0000
CPU min MHz:            1200.0000
BogoMIPS:               6000.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2295)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 001176

Test Date: Sep-2019

Test Sponsor: Supermicro

Hardware Availability: Oct-2019

Tested by: Supermicro

Software Availability: Aug-2019

Platform Notes (Continued)

L3 cache: 25344K
NUMA node0 CPU(s): 0-35
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpn rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512_vnni md_clear flush_lll arch_capabilities

/proc/cpuinfo cache data
cache size : 25344 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35
node 0 size: 128367 MB
node 0 free: 97751 MB
node distances:
node 0
0: 10

From /proc/meminfo
MemTotal: 131448716 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2295)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 001176

Test Date: Sep-2019

Test Sponsor: Supermicro

Hardware Availability: Oct-2019

Tested by: Supermicro

Software Availability: Aug-2019

Platform Notes (Continued)

```
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

uname -a:

```
Linux linux 4.12.14-95.29-default #1 SMP Thu Aug 1 15:34:33 UTC 2019 (47e48a4) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Sep 21 08:17

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	1.8T	103G	1.7T	6%	/home

From /sys/devices/virtual/dmi/id

BIOS:	American Megatrends Inc.	2.0	09/20/2019
Vendor:	Supermicro		
Product:	Super Server		
Serial:	0123456789		

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x Hynix HMA84GR7CJR4N-XN	32 GB	2 rank	3200, configured at 2934
4x NO DIMM	NO DIMM		

(End of data from sysinfo program)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2295)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 12.2

Test Date: Sep-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

Compiler Version Notes

```
=====  
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
| peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
=====
```

```
-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)  
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
=====
```

```
-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
Fortran | 648.exchange2_s(base, peak)  
=====
```

```
-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2295)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Sep-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

Base Portability Flags (Continued)

623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-L/usr/local/jetson-tx2/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2295)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 12.2

Test Date: Sep-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-DSPEC_SUPPRESS_OPENMP  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkalloc
```

```
623.xalancbmk_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkalloc
```

631.deepsjeng_s: Same as 623.xalancbmk_s

641.leela_s: Same as 623.xalancbmk_s

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2295)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Sep-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-09-21 23:44:35-0400.

Report generated on 2019-10-29 16:14:43 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-29.