



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

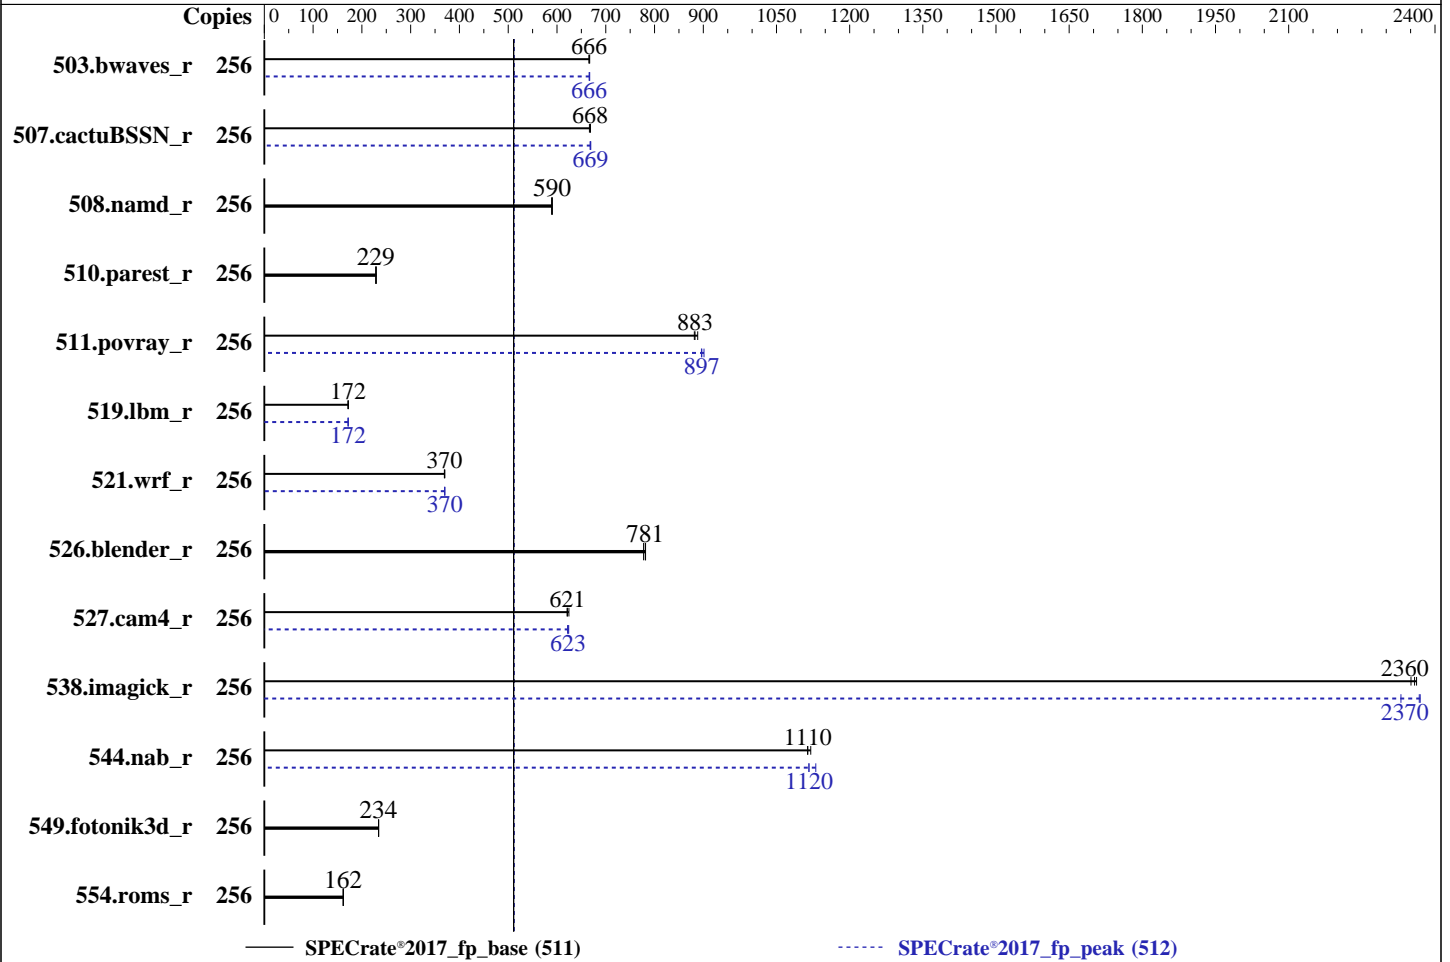

Hardware

CPU Name: AMD EPYC 7742
 Max MHz: 3400
 Nominal: 2250
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 4 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 800 GB SAS SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64) SP1
 Kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: HPE BIOS Version A42 10/15/2019 released Nov-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	3856	666	<u>3856</u>	<u>666</u>	3849	667	256	3854	666	3848	667	<u>3853</u>	<u>666</u>
507.cactuBSSN_r	256	486	666	<u>485</u>	<u>668</u>	485	669	256	484	669	<u>485</u>	<u>669</u>	485	668
508.namd_r	256	413	589	<u>412</u>	<u>590</u>	412	590	256	413	589	<u>412</u>	<u>590</u>	412	590
510.parest_r	256	2931	228	<u>2928</u>	<u>229</u>	2917	230	256	2931	228	<u>2928</u>	<u>229</u>	2917	230
511.povray_r	256	<u>677</u>	<u>883</u>	673	888	678	882	256	<u>666</u>	<u>897</u>	667	896	663	901
519.lbm_r	256	1567	172	1572	172	<u>1570</u>	<u>172</u>	256	1569	172	<u>1570</u>	<u>172</u>	1570	172
521.wrf_r	256	1554	369	<u>1551</u>	<u>370</u>	1550	370	256	1550	370	<u>1550</u>	<u>370</u>	1552	370
526.blender_r	256	<u>499</u>	<u>781</u>	499	782	501	778	256	<u>499</u>	<u>781</u>	499	782	501	778
527.cam4_r	256	717	624	<u>720</u>	<u>621</u>	721	621	256	718	624	720	622	<u>719</u>	<u>623</u>
538.imagick_r	256	<u>270</u>	<u>2360</u>	270	2360	271	2350	256	<u>269</u>	<u>2370</u>	273	2330	269	2370
544.nab_r	256	387	1110	<u>387</u>	<u>1110</u>	385	1120	256	386	1120	381	1130	<u>386</u>	<u>1120</u>
549.fotonik3d_r	256	<u>4259</u>	<u>234</u>	4260	234	4257	234	256	<u>4259</u>	<u>234</u>	4260	234	4257	234
554.roms_r	256	<u>2515</u>	<u>162</u>	2510	162	2515	162	256	<u>2515</u>	<u>162</u>	2510	162	2515	162

SPECrate®2017_fp_base = **511**

SPECrate®2017_fp_peak = **512**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017_B1/amd_rate_aocc200_rome_B_lib/64;/home/cpu2017_B1/amd_rate_aocc200_rome_B_lib/32:"
MALLOCCONF = "retain:true"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS Configuration
Thermal Configuration set to Maximum Cooling
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Minimum Processor Idle Power core C-State set to C6 State
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Throughput Compute
NUMA memory domains per socket set to Four memory domains per socket
Package Power Limit Control Mode set to Manual
Package Power Limit value set to 240
Sysinfo program /home/cpu2017_B1/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-30t0 Mon Oct 21 13:15:39 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Platform Notes (Continued)

From /proc/cpuinfo

model name : AMD EPYC 7742 64-Core Processor

2 "physical id"s (chips)

256 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 64

siblings : 128

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

From lscpu:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 256
On-line CPU(s) list: 0-255
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 2
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7742 64-Core Processor
Stepping: 0
CPU MHz: 2245.603
BogoMIPS: 4491.20
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-15,128-143
NUMA node1 CPU(s): 16-31,144-159
NUMA node2 CPU(s): 32-47,160-175
NUMA node3 CPU(s): 48-63,176-191
NUMA node4 CPU(s): 64-79,192-207
NUMA node5 CPU(s): 80-95,208-223
NUMA node6 CPU(s): 96-111,224-239
NUMA node7 CPU(s): 112-127,240-255
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxext
perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf
xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 128 129 130 131 132 133 134 135 136
137 138 139 140 141 142 143
node 0 size: 128705 MB
node 0 free: 128208 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 144 145 146 147 148 149
150 151 152 153 154 155 156 157 158 159
node 1 size: 129016 MB
node 1 free: 128591 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 160 161 162 163 164 165
166 167 168 169 170 171 172 173 174 175
node 2 size: 129016 MB
node 2 free: 128596 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 176 177 178 179 180 181
182 183 184 185 186 187 188 189 190 191
node 3 size: 128975 MB
node 3 free: 128363 MB
node 4 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 192 193 194 195 196 197
198 199 200 201 202 203 204 205 206 207
node 4 size: 129016 MB
node 4 free: 128595 MB
node 5 cpus: 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 208 209 210 211 212 213
214 215 216 217 218 219 220 221 222 223
node 5 size: 129016 MB
node 5 free: 128601 MB
node 6 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 224 225 226
227 228 229 230 231 232 233 234 235 236 237 238 239
node 6 size: 129016 MB
node 6 free: 128604 MB
node 7 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 240 241
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```

242 243 244 245 246 247 248 249 250 251 252 253 254 255
node 7 size: 129014 MB
node 7 free: 128601 MB
node distances:
node   0   1   2   3   4   5   6   7
  0:  10  12  12  12  32  32  32  32
  1:  12  10  12  12  32  32  32  32
  2:  12  12  10  12  32  32  32  32
  3:  12  12  12  10  32  32  32  32
  4:  32  32  32  32  10  12  12  12
  5:  32  32  32  32  12  10  12  12
  6:  32  32  32  32  12  12  10  12
  7:  32  32  32  32  12  12  12  10

```

```

From /proc/meminfo
MemTotal:          1056542760 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

```

uname -a:
Linux linux-30t0 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: conditional, RSB filling

```

run-level 3 Oct 21 00:56

```

SPEC is set to: /home/cpu2017_B1
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sdc2       btrfs    743G      17G  726G   3% /home

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Platform Notes (Continued)

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE A42 10/15/2019

Memory:

16x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200
16x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

```
503.bwaves_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops -Mrecursive -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000
-O3 -funroll-loops -Mrecursive -Kieee -fno-finite-math-only -lmvec
-lamdlibm -ljemalloc -lflang
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revG.html>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017_fp_base = 511

SPECrate®2017_fp_peak = 512

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-10-21 03:45:38-0400.

Report generated on 2019-11-13 10:04:28 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-12.