



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY CX2560 M5, Intel Xeon Bronze 3204,  
1.90 GHz

**SPECrate®2017\_int\_base = 38.5**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 19


**Test Date:** Jun-2019

Test Sponsor: Fujitsu

**Hardware Availability:** Apr-2019

Tested by: Fujitsu

**Software Availability:** Feb-2019

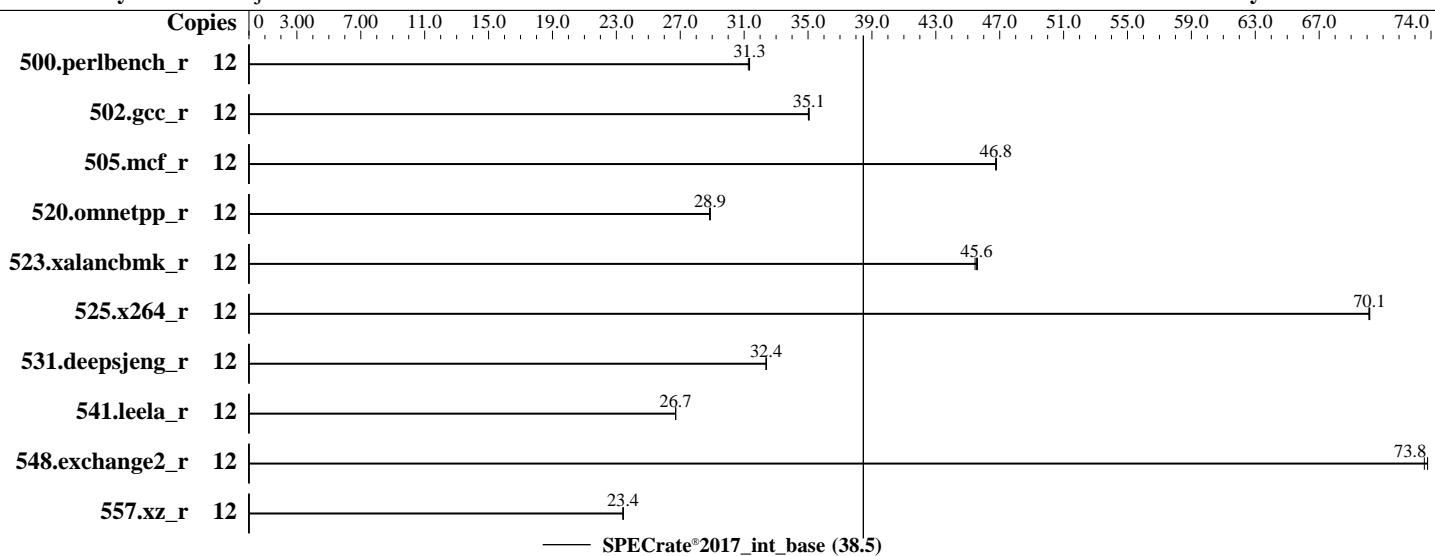

## Hardware

CPU Name: Intel Xeon Bronze 3204  
 Max MHz: 1900  
 Nominal: 1900  
 Enabled: 12 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 8.25 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2133)  
 Storage: 1 x SATA M.2 SSD, 256 GB  
 Other: None

## OS:

SUSE Linux Enterprise Server 15  
4.12.14-25.28-default

## Compiler:

C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux

## Parallel:

No

## Firmware:

Fujitsu BIOS Version V1.0.0.0 R1.6.0 for D3854-B1x, released Jun-2019. Tested as V1.0.0.0 R1.3.3 for D3854-B1x Mar-2019

## File System:

btrfs

## System State:

Run level 3 (multi-user)

## Base Pointers:

64-bit

## Peak Pointers:

Not Applicable

## Other:

None

## Power Management:

--

## Software



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY CX2560 M5, Intel Xeon Bronze 3204,  
1.90 GHz

**SPECrate®2017\_int\_base = 38.5**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	610	31.3	<b>610</b>	<b>31.3</b>	611	31.3									
502.gcc_r	12	<b>485</b>	<b>35.1</b>	485	35.0	485	35.1									
505.mcf_r	12	414	46.8	<b>415</b>	<b>46.8</b>	415	46.7									
520.omnetpp_r	12	<b>545</b>	<b>28.9</b>	546	28.8	545	28.9									
523.xalancbmk_r	12	<b>278</b>	<b>45.6</b>	278	45.6	279	45.5									
525.x264_r	12	<b>300</b>	<b>70.1</b>	299	70.2	300	70.1									
531.deepsjeng_r	12	425	32.4	424	32.4	<b>425</b>	<b>32.4</b>									
541.leela_r	12	744	26.7	<b>744</b>	<b>26.7</b>	744	26.7									
548.exchange2_r	12	<b>426</b>	<b>73.8</b>	426	73.8	427	73.6									
557.xz_r	12	<b>553</b>	<b>23.4</b>	553	23.4	554	23.4									

**SPECrate®2017\_int\_base = 38.5**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-11

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-1.0.5\_rate\_int/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M5, Intel Xeon Bronze 3204,  
1.90 GHz

SPECrate®2017\_int\_base = 38.5

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Adjacent Cache Line Prefetch = Disabled  
DCU Ip Prefetcher = Disabled  
DCU Streamer Prefetcher = Disabled  
Power Technology = Custom  
Energy Performance = Balanced Performance  
Uncore Frequency Scaling = Disabled  
Sub NUMA Clustering = Disabled  
Stale AtoS = Enable  
LLC Prefetch = Enabled

Sysinfo program /home/Benchmark/speccpu2017-1.0.5\_rate\_int/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-3m0d Wed Jun 12 20:50:05 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Bronze 3204 CPU @ 1.90GHz
  2 "physical id"s (chips)
  12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 6
  siblings : 6
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                12
On-line CPU(s) list:  0-11
Thread(s) per core:   1
Core(s) per socket:   6
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M5, Intel Xeon Bronze 3204,  
1.90 GHz

SPECrate®2017\_int\_base = 38.5

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

## Platform Notes (Continued)

CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Bronze 3204 CPU @ 1.90GHz  
Stepping: 6  
CPU MHz: 1900.000  
CPU max MHz: 1900.0000  
CPU min MHz: 800.0000  
BogoMIPS: 3800.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 8448K  
NUMA node0 CPU(s): 0-5  
NUMA node1 CPU(s): 6-11  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrandlahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpq rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsavect xgetbv1 xsaves cqmq\_llc cqmq\_occup\_llc cqmq\_mbm\_total cqmq\_mbm\_local dtherm arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req pku ospke avx512\_vnni flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 8448 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5  
node 0 size: 192197 MB  
node 0 free: 191881 MB  
node 1 cpus: 6 7 8 9 10 11  
node 1 size: 193528 MB  
node 1 free: 193214 MB  
node distances:  
node 0 1  
0: 10 18  
1: 18 10

From /proc/meminfo  
MemTotal: 394984300 kB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M5, Intel Xeon Bronze 3204,  
1.90 GHz

SPECrate®2017\_int\_base = 38.5

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

## Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15"
  VERSION_ID="15"
  PRETTY_NAME="SUSE Linux Enterprise Server 15"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux linux-3m0d 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling
```

run-level 3 Jun 12 20:47

```
SPEC is set to: /home/Benchmark/speccpu2017-1.0.5_rate_int
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       btrfs  236G  150G   87G  64%  /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU V1.0.0.0 R1.3.3 for D3854-B1x 03/15/2019

Memory:

```
6x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2133
4x Not Specified Not Specified
6x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2133
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M5, Intel Xeon Bronze 3204,  
1.90 GHz

SPECrate®2017\_int\_base = 38.5

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Compiler Version Notes

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base)  
| 525.x264\_r(base) 557.xz\_r(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2\_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M5, Intel Xeon Bronze 3204,  
1.90 GHz

SPECrate®2017\_int\_base = 38.5

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Base Portability Flags (Continued)

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fno-opt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-fno-plt
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fno-opt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-fno-plt
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fno-opt-mem-layout-trans=4 -fno-standard-realloc-lhs -falign array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-fno-plt
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-06-12 07:50:03-0400.

Report generated on 2019-11-26 12:50:47 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-26.