



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017\_fp\_base = 232

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

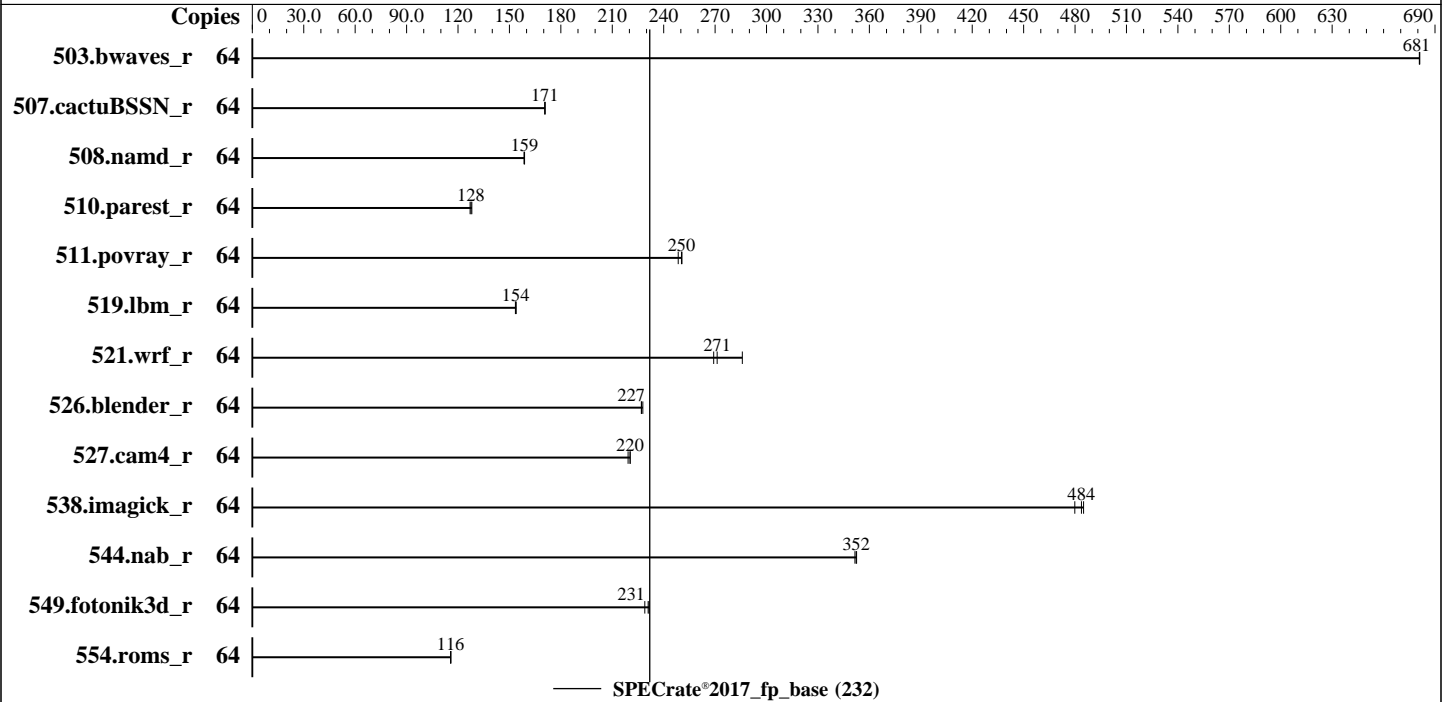

### Hardware

CPU Name: Intel Xeon Gold 5217  
 Max MHz: 3700  
 Nominal: 3000  
 Enabled: 32 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)  
 Storage: 1 x 800 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
 Kernel 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version TEE142E 2.30 released Aug-2019  
 tested as TEE141E 2.30 Jul-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017\_fp\_base = 232

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
503.bwaves_r	64	943	681	942	681	<b>943</b>	<b>681</b>									
507.cactuBSSN_r	64	474	171	475	171	<b>475</b>	<b>171</b>									
508.namd_r	64	384	159	<b>383</b>	<b>159</b>	383	159									
510.parest_r	64	1307	128	<b>1312</b>	<b>128</b>	1318	127									
511.povray_r	64	601	248	596	251	<b>597</b>	<b>250</b>									
519.lbm_r	64	<b>439</b>	<b>154</b>	438	154	439	153									
521.wrf_r	64	533	269	501	286	<b>529</b>	<b>271</b>									
526.blender_r	64	428	228	429	227	<b>429</b>	<b>227</b>									
527.cam4_r	64	508	220	<b>508</b>	<b>220</b>	511	219									
538.imagick_r	64	328	485	<b>329</b>	<b>484</b>	332	480									
544.nab_r	64	306	353	<b>306</b>	<b>352</b>	306	352									
549.fotonik3d_r	64	<b>1080</b>	<b>231</b>	1078	231	1089	229									
554.roms_r	64	879	116	<b>879</b>	<b>116</b>	878	116									

SPECrate®2017\_fp\_base = 232

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.0-ic19.0u4/lib/intel64"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 232

ThinkSystem SR850  
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

- NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
C-States set to Legacy

sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-9o83 Tue Nov 12 21:19:40 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5217 CPU @ 3.00GHz
 4 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7

```

```

From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 232

ThinkSystem SR850  
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

### Platform Notes (Continued)

```

Thread(s) per core:      2
Core(s) per socket:     8
Socket(s):               4
NUMA node(s):           4
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Gold 5217 CPU @ 3.00GHz
Stepping:                6
CPU MHz:                 3000.000
CPU max MHz:             3700.0000
CPU min MHz:             1200.0000
BogoMIPS:                6000.00
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                11264K
NUMA node0 CPU(s):      0-7,32-39
NUMA node1 CPU(s):      8-15,40-47
NUMA node2 CPU(s):      16-23,48-55
NUMA node3 CPU(s):      24-31,56-63

```

```

Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 32 33 34 35 36 37 38 39
node 0 size: 386664 MB
node 0 free: 386160 MB
node 1 cpus: 8 9 10 11 12 13 14 15 40 41 42 43 44 45 46 47
node 1 size: 387029 MB
node 1 free: 386721 MB
node 2 cpus: 16 17 18 19 20 21 22 23 48 49 50 51 52 53 54 55

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 232

ThinkSystem SR850  
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```
node 2 size: 387058 MB
node 2 free: 386770 MB
node 3 cpus: 24 25 26 27 28 29 30 31 56 57 58 59 60 61 62 63
node 3 size: 387055 MB
node 3 free: 386739 MB
node distances:
node 0 1 2 3
0: 10 21 21 31
1: 21 10 31 21
2: 21 31 10 21
3: 31 21 21 10
```

```
From /proc/meminfo
MemTotal: 1584955472 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-9o83 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: No status reported
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted
Speculation, IBPB, IBRS_FW
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 232

ThinkSystem SR850  
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

run-level 3 Nov 12 21:13

SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4  
Filesystem      Type      Size   Used Avail Use% Mounted on  
/dev/sda2       btrfs    744G   147G  598G  20% /home

From /sys/devices/virtual/dmi/id  
BIOS:      Lenovo -[TEE141E-2.30]- 07/02/2019  
Vendor:    Lenovo  
Product:   ThinkSystem SR850 -[7X1925Z000]-  
Product Family: ThinkSystem  
Serial:    1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C                   | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++                 | 508.namd\_r(base) 510.parest\_r(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++, C             | 511.povray\_r(base) 526.blender\_r(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 232

ThinkSystem SR850  
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Nov-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** May-2019

### Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)

=====  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

=====  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

=====  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR850  
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017\_fp\_base = 232

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

## Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
```

```
507.cactuBSSN_r: -DSPEC_LP64
```

```
508.namd_r: -DSPEC_LP64
```

```
510.parest_r: -DSPEC_LP64
```

```
511.povray_r: -DSPEC_LP64
```

```
519.lbm_r: -DSPEC_LP64
```

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

```
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
538.imagick_r: -DSPEC_LP64
```

```
544.nab_r: -DSPEC_LP64
```

```
549.fotonik3d_r: -DSPEC_LP64
```

```
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR850  
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017\_fp\_base = 232

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-12 08:19:39-0500.

Report generated on 2019-12-11 12:48:22 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-11.