



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSspeed®2017_fp_base = 151

SPECSspeed®2017_fp_peak = 153

CPU2017 License: 55


Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

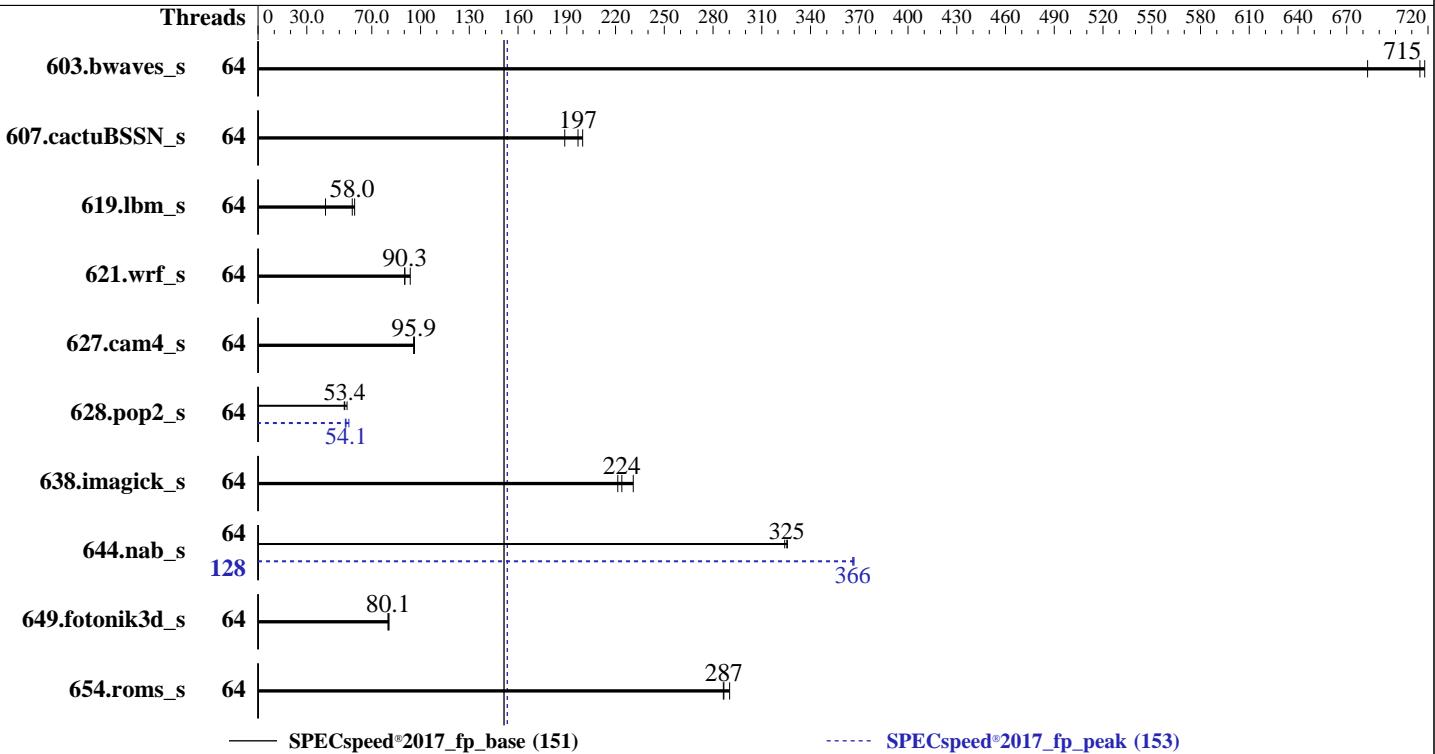

Hardware

CPU Name: AMD EPYC 7532
 Max MHz: 3300
 Nominal: 2400
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 16 MB shared / 2 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 800 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 Compiler: kernel 4.12.14-195-default
 Parallel: C/C++/Fortran: Version 2.0.0 of AOCC
 Firmware: Yes
 File System: Version 1.2.6 released Nov-2019
 System State: tmpfs
 Base Pointers: Run level 3 (multi-user)
 Peak Pointers: 64-bit
 Other: 64-bit
 Power Management: jemalloc: jemalloc memory allocator library v5.1.0
 BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	82.2	718	82.5	715	86.4	683	64	82.2	718	82.5	715	86.4	683
607.cactuBSSN_s	64	83.4	200	84.7	197	88.3	189	64	83.4	200	84.7	197	88.3	189
619.lbm_s	64	90.3	58.0	126	41.5	88.1	59.4	64	90.3	58.0	126	41.5	88.1	59.4
621.wrf_s	64	141	93.7	146	90.3	147	90.3	64	141	93.7	146	90.3	147	90.3
627.cam4_s	64	92.4	95.9	92.1	96.3	92.5	95.8	64	92.4	95.9	92.1	96.3	92.5	95.8
628.pop2_s	64	222	53.4	224	53.0	217	54.8	64	221	53.7	219	54.1	212	55.9
638.imagick_s	64	64.4	224	62.5	231	65.2	221	64	64.4	224	62.5	231	65.2	221
644.nab_s	64	53.7	325	53.9	324	53.6	326	128	47.6	367	47.7	366	47.7	366
649.fotonik3d_s	64	114	80.0	113	80.6	114	80.1	64	114	80.0	113	80.6	114	80.1
654.roms_s	64	54.3	290	54.9	287	55.0	286	64	54.3	290	54.9	287	55.0	286
SPECSpeed®2017_fp_base = 151							SPECSpeed®2017_fp_peak = 153							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
 Set swappiness=1 to swap only if necessary
 Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/mnt/ramdisk
    /cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"
```

Environment variables set by runcpu during the 628.pop2_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 644.nab_s peak run:

```
GOMP_CPU_AFFINITY = "0 64 1 65 2 66 3 67 4 68 5 69 6 70 7 71 8 72 9 73 10 74
    11 75 12 76 13 77 14 78 15 79 16 80 17 81 18 82 19 83 20 84 21 85 22 86
    23 87 24 88 25 89 26 90 27 91 28 92 29 93 30 94 31 95 32 96 33 97 34 98
    35 99 36 100 37 101 38 102 39 103 40 104 41 105 42 106 43 107 44 108 45
    109 46 110 47 111 48 112 49 113 50 114 51 115 52 116 53 117 54 118 55
    119 56 120 57 121 58 122 59 123 60 124 61 125 62 126 63 127"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 4
CCX as NUMA Domain set to Enabled
System Profile set to Custom
CPU Power Management set to Maximum Performance

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

Memory Frequency set to Maximum Performance

Turbo Boost Enabled

Cstates set to Enabled

Memory Patrol Scrub Disabled

Memory Refresh Rate set to 1x

PCI ASPM L1 Link Power Management Disabled

Determinism Slider set to Power Determinism

Efficiency Optimized Mode Disabled

Memory Interleaving set to Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on linux-g3ob Tue Dec 3 13:46:59 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7532 32-Core Processor
  2 "physical id"s (chips)
  128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 32
  siblings : 64
  physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45
  48 49 52 53 56 57 60 61
  physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45
  48 49 52 53 56 57 60 61
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             2
NUMA node(s):          32
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7532 32-Core Processor
Stepping:               0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

CPU MHz: 2395.376
BogoMIPS: 4790.75
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0,1,64,65
NUMA node1 CPU(s): 2,3,66,67
NUMA node2 CPU(s): 4,5,68,69
NUMA node3 CPU(s): 6,7,70,71
NUMA node4 CPU(s): 8,9,72,73
NUMA node5 CPU(s): 10,11,74,75
NUMA node6 CPU(s): 12,13,76,77
NUMA node7 CPU(s): 14,15,78,79
NUMA node8 CPU(s): 16,17,80,81
NUMA node9 CPU(s): 18,19,82,83
NUMA node10 CPU(s): 20,21,84,85
NUMA node11 CPU(s): 22,23,86,87
NUMA node12 CPU(s): 24,25,88,89
NUMA node13 CPU(s): 26,27,90,91
NUMA node14 CPU(s): 28,29,92,93
NUMA node15 CPU(s): 30,31,94,95
NUMA node16 CPU(s): 32,33,96,97
NUMA node17 CPU(s): 34,35,98,99
NUMA node18 CPU(s): 36,37,100,101
NUMA node19 CPU(s): 38,39,102,103
NUMA node20 CPU(s): 40,41,104,105
NUMA node21 CPU(s): 42,43,106,107
NUMA node22 CPU(s): 44,45,108,109
NUMA node23 CPU(s): 46,47,110,111
NUMA node24 CPU(s): 48,49,112,113
NUMA node25 CPU(s): 50,51,114,115
NUMA node26 CPU(s): 52,53,116,117
NUMA node27 CPU(s): 54,55,118,119
NUMA node28 CPU(s): 56,57,120,121
NUMA node29 CPU(s): 58,59,122,123
NUMA node30 CPU(s): 60,61,124,125
NUMA node31 CPU(s): 62,63,126,127
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmpfperf pnpi pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt  
lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter  
pfthreshold avic v_vmsave_vmlload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data  
cache size : 512 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a  
physical chip.
```

```
available: 32 nodes (0-31)  
node 0 cpus: 0 1 64 65  
node 0 size: 15676 MB  
node 0 free: 15630 MB  
node 1 cpus: 2 3 66 67  
node 1 size: 16127 MB  
node 1 free: 16105 MB  
node 2 cpus: 4 5 68 69  
node 2 size: 16127 MB  
node 2 free: 16077 MB  
node 3 cpus: 6 7 70 71  
node 3 size: 16126 MB  
node 3 free: 16103 MB  
node 4 cpus: 8 9 72 73  
node 4 size: 16127 MB  
node 4 free: 16076 MB  
node 5 cpus: 10 11 74 75  
node 5 size: 16127 MB  
node 5 free: 16083 MB  
node 6 cpus: 12 13 76 77  
node 6 size: 16127 MB  
node 6 free: 16086 MB  
node 7 cpus: 14 15 78 79  
node 7 size: 16126 MB  
node 7 free: 16084 MB  
node 8 cpus: 16 17 80 81  
node 8 size: 16127 MB  
node 8 free: 16112 MB  
node 9 cpus: 18 19 82 83  
node 9 size: 16097 MB  
node 9 free: 16083 MB  
node 10 cpus: 20 21 84 85  
node 10 size: 16127 MB  
node 10 free: 16112 MB  
node 11 cpus: 22 23 86 87  
node 11 size: 16126 MB  
node 11 free: 16112 MB  
node 12 cpus: 24 25 88 89
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

```
node 12 size: 16127 MB
node 12 free: 16001 MB
node 13 cpus: 26 27 90 91
node 13 size: 16127 MB
node 13 free: 16036 MB
node 14 cpus: 28 29 92 93
node 14 size: 16127 MB
node 14 free: 16099 MB
node 15 cpus: 30 31 94 95
node 15 size: 16114 MB
node 15 free: 11853 MB
node 16 cpus: 32 33 96 97
node 16 size: 16127 MB
node 16 free: 16109 MB
node 17 cpus: 34 35 98 99
node 17 size: 16127 MB
node 17 free: 16108 MB
node 18 cpus: 36 37 100 101
node 18 size: 16127 MB
node 18 free: 16113 MB
node 19 cpus: 38 39 102 103
node 19 size: 16126 MB
node 19 free: 16112 MB
node 20 cpus: 40 41 104 105
node 20 size: 16127 MB
node 20 free: 16112 MB
node 21 cpus: 42 43 106 107
node 21 size: 16127 MB
node 21 free: 16113 MB
node 22 cpus: 44 45 108 109
node 22 size: 16127 MB
node 22 free: 16114 MB
node 23 cpus: 46 47 110 111
node 23 size: 16126 MB
node 23 free: 16112 MB
node 24 cpus: 48 49 112 113
node 24 size: 16127 MB
node 24 free: 16109 MB
node 25 cpus: 50 51 114 115
node 25 size: 16127 MB
node 25 free: 16113 MB
node 26 cpus: 52 53 116 117
node 26 size: 16127 MB
node 26 free: 16113 MB
node 27 cpus: 54 55 118 119
node 27 size: 16126 MB
node 27 free: 16112 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

```
node 28 cpus: 56 57 120 121
node 28 size: 16127 MB
node 28 free: 16113 MB
node 29 cpus: 58 59 122 123
node 29 size: 16127 MB
node 29 free: 16114 MB
node 30 cpus: 60 61 124 125
node 30 size: 16127 MB
node 30 free: 16114 MB
node 31 cpus: 62 63 126 127
node 31 size: 16124 MB
node 31 free: 16110 MB
node distances:
```

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
20	21	22	23	24	25	26	27	28	29	30	31									
0:	10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	32	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
1:	11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	32	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
2:	11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	32	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
3:	11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	32	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
4:	12	12	12	12	10	11	11	11	12	12	12	12	12	12	12	32	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
5:	12	12	12	12	11	10	11	11	12	12	12	12	12	12	12	32	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
6:	12	12	12	12	11	11	10	11	12	12	12	12	12	12	12	32	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
7:	12	12	12	12	11	11	11	10	12	12	12	12	12	12	12	32	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
8:	12	12	12	12	12	12	12	12	12	10	11	11	11	12	12	12	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
9:	12	12	12	12	12	12	12	12	12	11	10	11	11	12	12	12	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
10:	12	12	12	12	12	12	12	12	12	11	11	10	11	12	12	12	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
11:	12	12	12	12	12	12	12	12	11	11	11	11	10	12	12	12	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
12:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	10	11	11	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
13:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	10	11	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									
14:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	11	10	11	32	
32	32	32	32	32	32	32	32	32	32	32	32									
15:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	11	10	32	32	
32	32	32	32	32	32	32	32	32	32	32	32									

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

16:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	10	11	11	11	
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	10	11	11	
17:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	11	10	11	11
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
18:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	11	11	10	11
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
19:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	11	11	11	10
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
20:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
21:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
22:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
23:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
24:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
25:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
26:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
27:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
28:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
29:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
30:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
31:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	

From /proc/meminfo

```
MemTotal:      527939392 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

CPE_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:

```
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrampoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Dec 2 07:57 last=5

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	140G	4.0G	137G	3%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

```
BIOS: Dell Inc. 1.2.6 11/21/2019
Vendor: Dell Inc.
Product: PowerEdge R7525
Product Family: PowerEdge
Serial: 1234567
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
3x 802C80B3802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
1x 802C80B3802C 36ASF4G72PZ-3G2E7 32 GB 2 rank 3200
2x 802C8632802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
1x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
9x 80AD863280AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
16x Not Specified Not Specified
```

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_base = 151

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Compiler Version Notes (Continued)

AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins

AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Base Optimization Flags

C benchmarks:

```
-fno -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-fno -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2  
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang
```

Benchmarks using both Fortran and C:

```
-fno -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs  
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -fno -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch  
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -lmvec -lamdlibm -ljemalloc -flang

Base Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes  
  
638.imagick_s: basepeak = yes  
  
644.nab_s: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp  
-lpthread -ldl -ljemalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: basepeak = yes  
  
649.fotonik3d_s: basepeak = yes  
  
654.roms_s: basepeak = yes
```

Benchmarks using both Fortran and C:

```
621.wrf_s: basepeak = yes  
  
627.cam4_s: basepeak = yes  
  
628.pop2_s: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 151

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECSpeed®2017_fp_peak = 153

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

628.pop2_s (continued):

```
-flv-function-specialization -O3 -funroll-loops  
-Mrecursive -Kieee -fno-finite-math-only -DSPEC_OPENMP  
-fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread  
-ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactubSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-03 14:46:58-0500.

Report generated on 2019-12-26 11:31:50 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-24.