



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55


Test Date: Nov-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

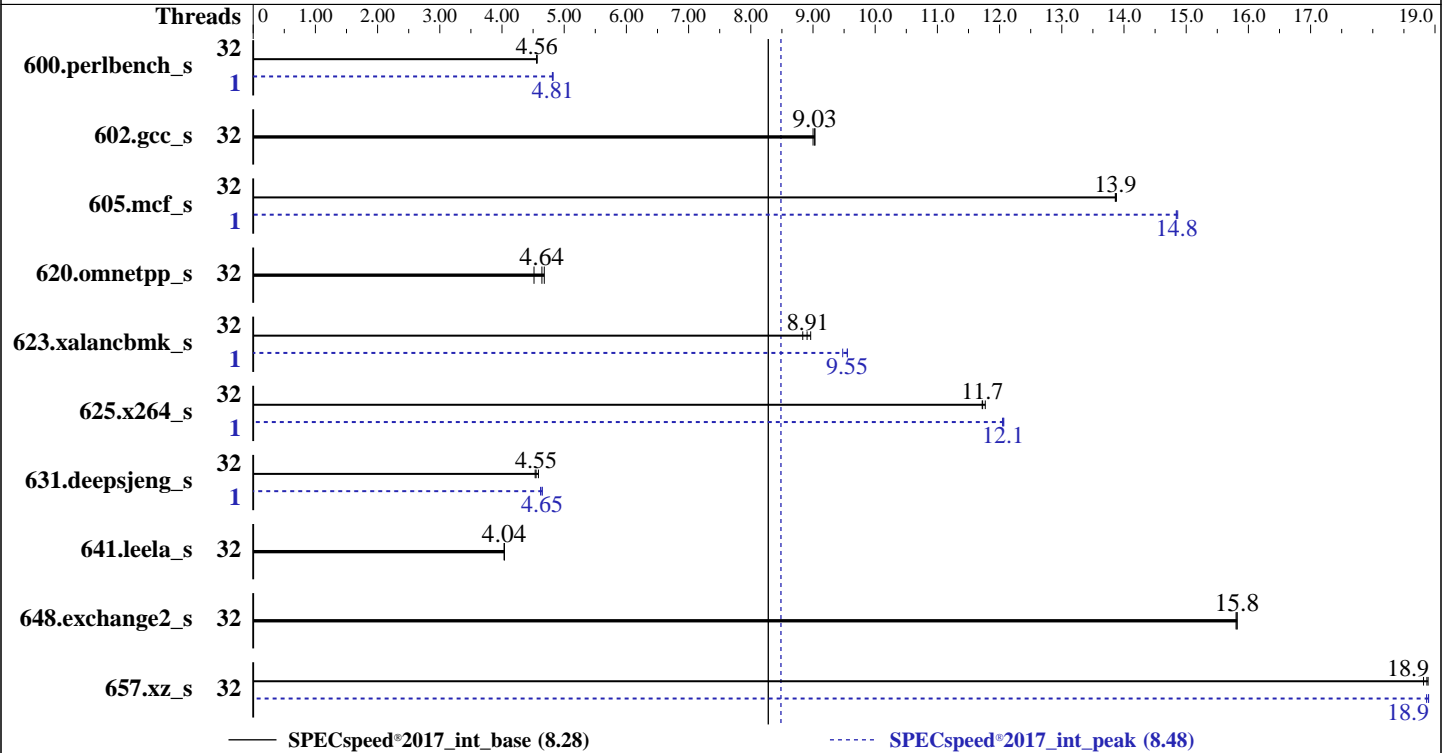

### Hardware

CPU Name: AMD EPYC 7282  
 Max MHz: 3200  
 Nominal: 2800  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 2 x 960 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1  
 kernel 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.2.6 released Nov-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Date: Nov-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	390	4.56	389	4.57	<b>389</b>	<b>4.56</b>	1	369	4.81	<b>369</b>	<b>4.81</b>	368	4.82
602.gcc_s	32	441	9.03	442	9.00	<b>441</b>	<b>9.03</b>	32	441	9.03	442	9.00	<b>441</b>	<b>9.03</b>
605.mcf_s	32	340	13.9	341	13.9	<b>340</b>	<b>13.9</b>	1	<b>318</b>	<b>14.8</b>	318	14.8	318	14.9
620.omnetpp_s	32	349	4.68	<b>351</b>	<b>4.64</b>	361	4.51	32	349	4.68	<b>351</b>	<b>4.64</b>	361	4.51
623.xalancbmk_s	32	158	8.96	<b>159</b>	<b>8.91</b>	160	8.84	1	148	9.55	<b>148</b>	<b>9.55</b>	150	9.48
625.x264_s	32	151	11.7	<b>150</b>	<b>11.7</b>	150	11.8	1	146	12.0	146	12.1	<b>146</b>	<b>12.1</b>
631.deepsjeng_s	32	316	4.53	<b>315</b>	<b>4.55</b>	312	4.59	1	<b>308</b>	<b>4.65</b>	310	4.62	308	4.65
641.leela_s	32	<b>423</b>	<b>4.04</b>	422	4.04	423	4.04	32	<b>423</b>	<b>4.04</b>	422	4.04	423	4.04
648.exchange2_s	32	186	15.8	<b>186</b>	<b>15.8</b>	186	15.8	32	186	15.8	<b>186</b>	<b>15.8</b>	186	15.8
657.xz_s	32	329	18.8	327	18.9	<b>328</b>	<b>18.9</b>	32	<b>327</b>	<b>18.9</b>	328	18.9	327	18.9

SPECspeed®2017\_int\_base = **8.28**

SPECspeed®2017\_int\_peak = **8.48**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

```
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>
```

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-63"

LD\_LIBRARY\_PATH =

"/root/cpu2017-1.1.0/amd\_speed\_aocc200\_rome\_C\_lib/64;/root/cpu2017-1.1.0/amd\_speed\_aocc200\_rome\_C\_lib/32:"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 600.perlbench\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

OMP\_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:

GOMP\_CPU\_AFFINITY = "0-31"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 4  
 CCX as NUMA Domain set to Enabled  
 System Profile set to Custom  
 CPU Power Management set to Maximum Performance  
 Memory Frequency set to Maximum Performance  
 Turbo Boost Enabled  
 Cstates set to Enabled  
 Memory Patrol Scrub Disabled  
 Memory Refresh Rate set to 1x  
 PCI ASPM L1 Link Power Management Disabled  
 Determinism Slider set to Power Determinism  
 Efficiency Optimized Mode Disabled  
 Memory Interleaving set to Disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo  
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
 running on linux-g3ob Thu Nov 28 08:24:43 2019

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : AMD EPYC 7282 16-Core Processor  
 2 "physical id"s (chips)  
 64 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 16  
 siblings : 32  
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:  
 Architecture: x86\_64  
 CPU op-mode(s): 32-bit, 64-bit  
 Byte Order: Little Endian  
 Address sizes: 43 bits physical, 48 bits virtual  
 CPU(s): 64  
 On-line CPU(s) list: 0-63  
 Thread(s) per core: 2  
 Core(s) per socket: 16  
 Socket(s): 2  
 NUMA node(s): 8  
 Vendor ID: AuthenticAMD  
 CPU family: 23

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```

Model: 49
Model name: AMD EPYC 7282 16-Core Processor
Stepping: 0
CPU MHz: 2794.888
BogoMIPS: 5589.77
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
NUMA node7 CPU(s): 28-31,60-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_omsave_vmload vgif umip rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 63932 MB
node 0 free: 63790 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 64480 MB
node 1 free: 64275 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 64509 MB
node 2 free: 64416 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 64498 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```

node 3 free: 64330 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 64510 MB
node 4 free: 64418 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 64509 MB
node 5 free: 64417 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 64509 MB
node 6 free: 64392 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 64509 MB
node 7 free: 64411 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 11 11 11 11 11 11
  1: 11 10 11 11 11 11 11 11
  2: 11 11 10 11 11 11 11 11
  3: 11 11 11 10 11 11 11 11
  4: 11 11 11 11 10 11 11 11
  5: 11 11 11 11 11 10 11 11
  6: 11 11 11 11 11 11 10 11
  7: 11 11 11 11 11 11 11 10

```

```

From /proc/meminfo
MemTotal:      527831056 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

```

uname -a:
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Not affected

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```

Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):     Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):     Mitigation: Full AMD retpoline, IBPB:
                                          conditional, IBRS_FW, STIBP: conditional, RSB
                                          filling

```

run-level 3 Nov 27 15:20 last=5

SPEC is set to: /root/cpu2017-1.1.0

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   440G   36G  405G   8% /

```

```

From /sys/devices/virtual/dmi/id
BIOS:      Dell Inc. 1.2.6 11/21/2019
Vendor:    Dell Inc.
Product:   PowerEdge R7525
Product Family: PowerEdge
Serial:    1234567

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
 7x 802C80B3802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
 8x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
 1x 80AD80B380AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
16x Not Specified Not Specified

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
          | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
          |
-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

=====  
C++ | 623.xalancbmk\_s(peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++ | 623.xalancbmk\_s(peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
Fortran | 648.exchange2\_s(base, peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
-----

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -z muldefs -DSPEC\_OPENMP -fopenmp

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C benchmarks (continued):

-DUSE\_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm  
-ljemalloc -lflang

C++ benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-partial-unswitch -z muldefs -DSPEC\_OPENMP -fopenmp  
-DUSE\_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm  
-ljemalloc -lflang

Fortran benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -DSPEC\_OPENMP -fopenmp -DUSE\_OPENMP  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang

## Base Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

602.gcc\_s: basepeak = yes

```
605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

625.x264\_s: Same as 600.perlbench\_s

```
657.xz_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

```
623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

623.xalancbmk\_s (continued):

```
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc
```

631.deepsjeng\_s: -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks (except as noted below):

```
-Wno-return-type
```

623.xalancbmk\_s: -Wno-return-type

```
-L/sppo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32
```

Fortran benchmarks:

```
-Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.28

PowerEdge R7525 (AMD EPYC 7282, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.48

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2019

**Hardware Availability:** Feb-2020

**Software Availability:** Aug-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-28 09:24:43-0500.

Report generated on 2019-12-26 11:33:23 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-24.