



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

**SPECrate®2017\_fp\_base = 236**

**SPECrate®2017\_fp\_peak = 237**

CPU2017 License: 3


**Test Date:** Feb-2020

**Test Sponsor:** HPE

**Hardware Availability:** Dec-2019

**Tested by:** HPE

**Software Availability:** Aug-2019

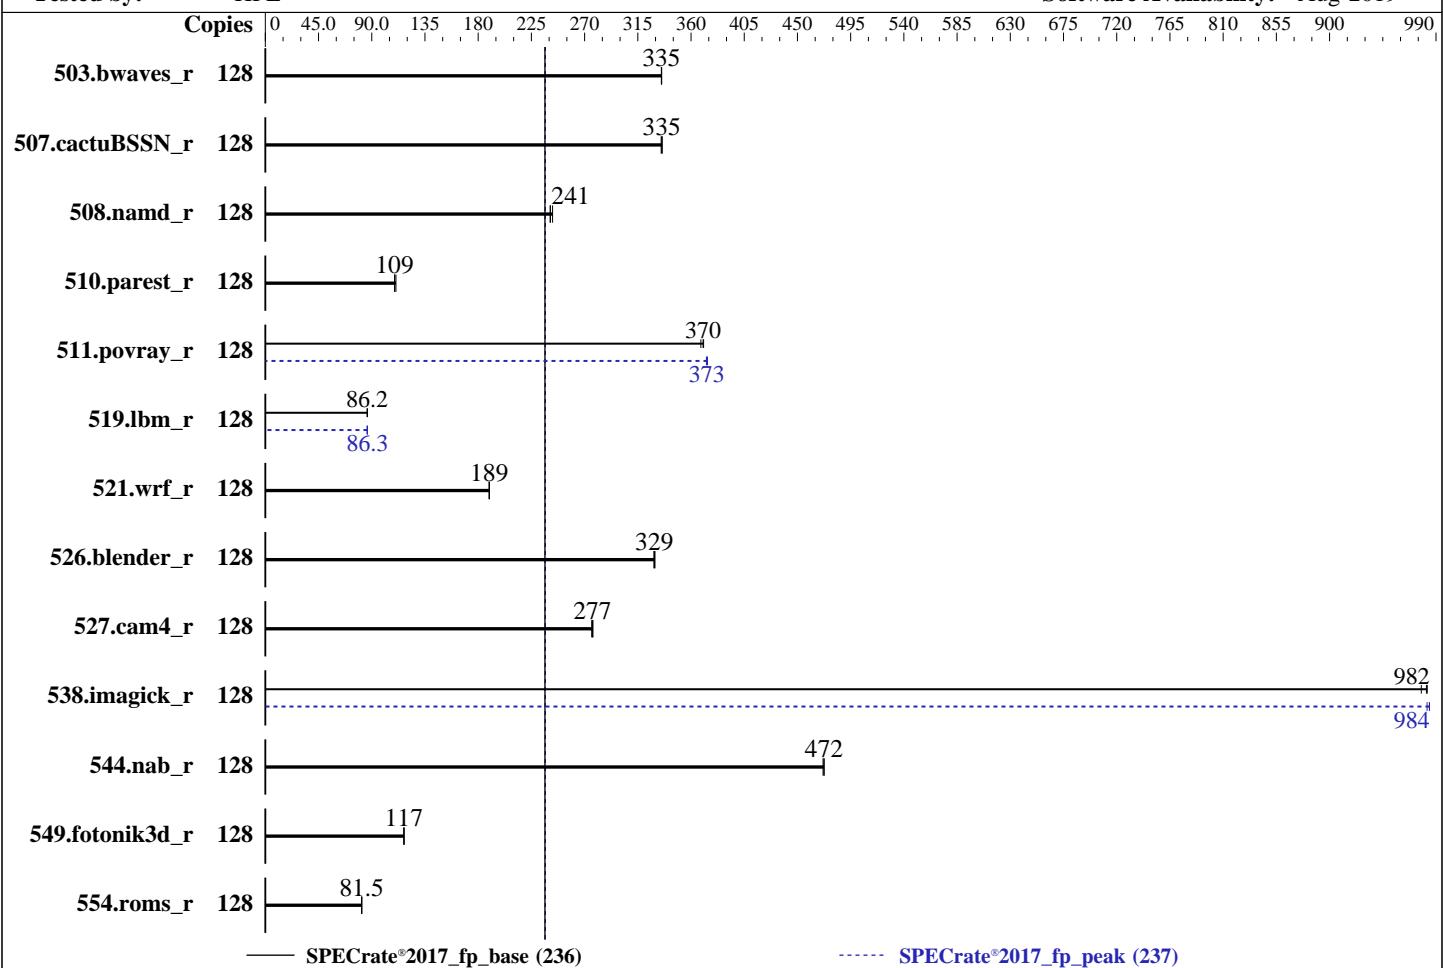

— SPECrate®2017\_fp\_base (236)

----- SPECrate®2017\_fp\_peak (237)

## Hardware

CPU Name: AMD EPYC 7702P  
Max MHz: 3350  
Nominal: 2000  
Enabled: 64 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 256 MB I+D on chip per chip,  
16 MB shared / 4 cores  
Other: None  
Memory: 512 GB (8 x 64 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 480 GB SATA SSD, RAID 0  
Other: None

## OS:

SUSE Linux Enterprise Server 15 (x86\_64) SP1  
Kernel 4.12.14-195-default

## Compiler:

C/C++/Fortran: Version 2.0.0 of AOCC

## Parallel:

No

## Firmware:

HPE BIOS Version A43 12/12/2019 released Dec-2019

## File System:

xfs

## System State:

Run level 3 (multi-user)

## Base Pointers:

64-bit

## Peak Pointers:

64-bit

## Other:

jemalloc: jemalloc memory allocator library v5.2.0

## Power Management:

BIOS set to prefer performance at the cost of additional power usage

## Software



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

**SPECrate®2017\_fp\_base = 236**

**SPECrate®2017\_fp\_peak = 237**

CPU2017 License: 3

Test Date: Feb-2020

Test Sponsor: HPE

Hardware Availability: Dec-2019

Tested by: HPE

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	3830	335	<b>3831</b>	<b>335</b>	3833	335	128	3830	335	<b>3831</b>	<b>335</b>	3833	335
507.cactuBSSN_r	128	483	336	484	335	<b>483</b>	<b>335</b>	128	483	336	484	335	<b>483</b>	<b>335</b>
508.namd_r	128	505	241	501	243	<b>504</b>	<b>241</b>	128	505	241	501	243	<b>504</b>	<b>241</b>
510.parest_r	128	3063	109	<b>3061</b>	<b>109</b>	3032	110	128	3063	109	<b>3061</b>	<b>109</b>	3032	110
511.povray_r	128	806	371	<b>807</b>	<b>370</b>	811	368	128	799	374	801	373	<b>801</b>	<b>373</b>
519.lbm_r	128	<b>1566</b>	<b>86.2</b>	1561	86.4	1566	86.2	128	1562	86.4	<b>1563</b>	<b>86.3</b>	1568	86.0
521.wrf_r	128	1513	190	1515	189	<b>1514</b>	<b>189</b>	128	1513	190	1515	189	<b>1514</b>	<b>189</b>
526.blender_r	128	592	330	593	329	<b>592</b>	<b>329</b>	128	592	330	593	329	<b>592</b>	<b>329</b>
527.cam4_r	128	<b>809</b>	<b>277</b>	811	276	808	277	128	<b>809</b>	<b>277</b>	811	276	808	277
538.imagick_r	128	324	983	<b>324</b>	<b>982</b>	326	978	128	<b>323</b>	<b>984</b>	324	982	323	984
544.nab_r	128	<b>456</b>	<b>472</b>	457	472	456	472	128	<b>456</b>	<b>472</b>	457	472	456	472
549.fotonik3d_r	128	4252	117	4257	117	<b>4255</b>	<b>117</b>	128	4252	117	4257	117	<b>4255</b>	<b>117</b>
554.roms_r	128	2493	81.6	2499	81.4	<b>2495</b>	<b>81.5</b>	128	2493	81.6	2499	81.4	<b>2495</b>	<b>81.5</b>

**SPECrate®2017\_fp\_base = 236**

**SPECrate®2017\_fp\_peak = 237**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

**SPECrate®2017\_fp\_base = 236**

**SPECrate®2017\_fp\_peak = 237**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2020

**Hardware Availability:** Dec-2019

**Software Availability:** Aug-2019

## Operating System Notes (Continued)

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc200_rome_C_lib/64;/home/cpu2017/amd_rate_aoc
    c200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fno-jemalloc 5.2.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS Configuration

Thermal Configuration set to Maximum Cooling

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Minimum Processor Idle Power Core C-State set to C6 State

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Throughput Compute

NUMA memory domains per socket set to Four memory domains per socket

C-State Efficiency mode set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

**SPECrate®2017\_fp\_base = 236**

**SPECrate®2017\_fp\_peak = 237**

CPU2017 License: 3

**Test Date:** Feb-2020

Test Sponsor: HPE

**Hardware Availability:** Dec-2019

Tested by: HPE

**Software Availability:** Aug-2019

## Platform Notes (Continued)

Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on linux-q10k Thu Aug 8 09:18:56 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7702P 64-Core Processor
  1 "physical id"s (chips)
  128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 64
  siblings : 128
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             1
NUMA node(s):          4
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7702P 64-Core Processor
Stepping:               0
CPU MHz:                1996.152
BogoMIPS:              3992.30
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:                512K
L3 cache:                16384K
NUMA node0 CPU(s):     0-15,64-79
NUMA node1 CPU(s):     16-31,80-95
NUMA node2 CPU(s):     32-47,96-111
NUMA node3 CPU(s):     48-63,112-127
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

SPECrate®2017\_fp\_base = 236

SPECrate®2017\_fp\_peak = 237

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

```
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmpfperf pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrandlahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_13 cdp_13 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmlload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75
76 77 78 79
node 0 size: 128708 MB
node 0 free: 128362 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88
89 90 91 92 93 94 95
node 1 size: 129016 MB
node 1 free: 128768 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102
103 104 105 106 107 108 109 110 111
node 2 size: 128987 MB
node 2 free: 128710 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117
118 119 120 121 122 123 124 125 126 127
node 3 size: 129003 MB
node 3 free: 128632 MB
node distances:
node 0 1 2 3
 0: 10 12 12 12
 1: 12 10 12 12
 2: 12 12 10 12
 3: 12 12 12 10
```

```
From /proc/meminfo
MemTotal:      528092964 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

SPECrate®2017\_fp\_base = 236

SPECrate®2017\_fp\_peak = 237

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

```
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-q10k 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Aug 8 09:18

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   155G  7.8G  148G   6%  /home
```

```
From /sys/devices/virtual/dmi/id
BIOS:      HPE A43 12/12/2019
Vendor:    HPE
Product:   ProLiant DL325 Gen10 Plus
Product Family: ProLiant
Serial:    CN792906TF
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
8x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200
8x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

SPECrate®2017\_fp\_base = 236

SPECrate®2017\_fp\_peak = 237

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Compiler Version Notes

=====

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

=====

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

=====

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

**SPECrate®2017\_fp\_base = 236**

**SPECrate®2017\_fp\_peak = 237**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2020

**Hardware Availability:** Dec-2019

**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

---

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

---

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

---

=====

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

---

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

SPECrate®2017\_fp\_base = 236

SPECrate®2017\_fp\_peak = 237

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-fno -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-fno-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc  
-lflang

C++ benchmarks:

-std=c++98 -fno -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

SPECrate®2017\_fp\_base = 236

SPECrate®2017\_fp\_peak = 237

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

**SPECrate®2017\_fp\_base = 236**

**SPECrate®2017\_fp\_peak = 237**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2020

**Hardware Availability:** Dec-2019

**Software Availability:** Aug-2019

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -flang
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

SPECrate®2017\_fp\_base = 236

SPECrate®2017\_fp\_peak = 237

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

519.lbm\_r (continued):

```
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

538.imagick\_r: Same as 519.lbm\_r

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus  
(2.00 GHz, AMD EPYC 7702P)

SPECrate®2017\_fp\_base = 236

SPECrate®2017\_fp\_peak = 237

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

511.povray\_r (continued):

```
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactusBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revH.html>  
<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revH.xml>  
<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-08-08 09:18:55-0400.

Report generated on 2020-04-28 15:28:28 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-28.