



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

**SPECrate®2017\_fp\_base = 199**

**SPECrate®2017\_fp\_peak = 200**

CPU2017 License: 3


**Test Date:** Mar-2020

**Test Sponsor:** HPE

**Hardware Availability:** Dec-2019

**Tested by:** HPE

**Software Availability:** Aug-2019

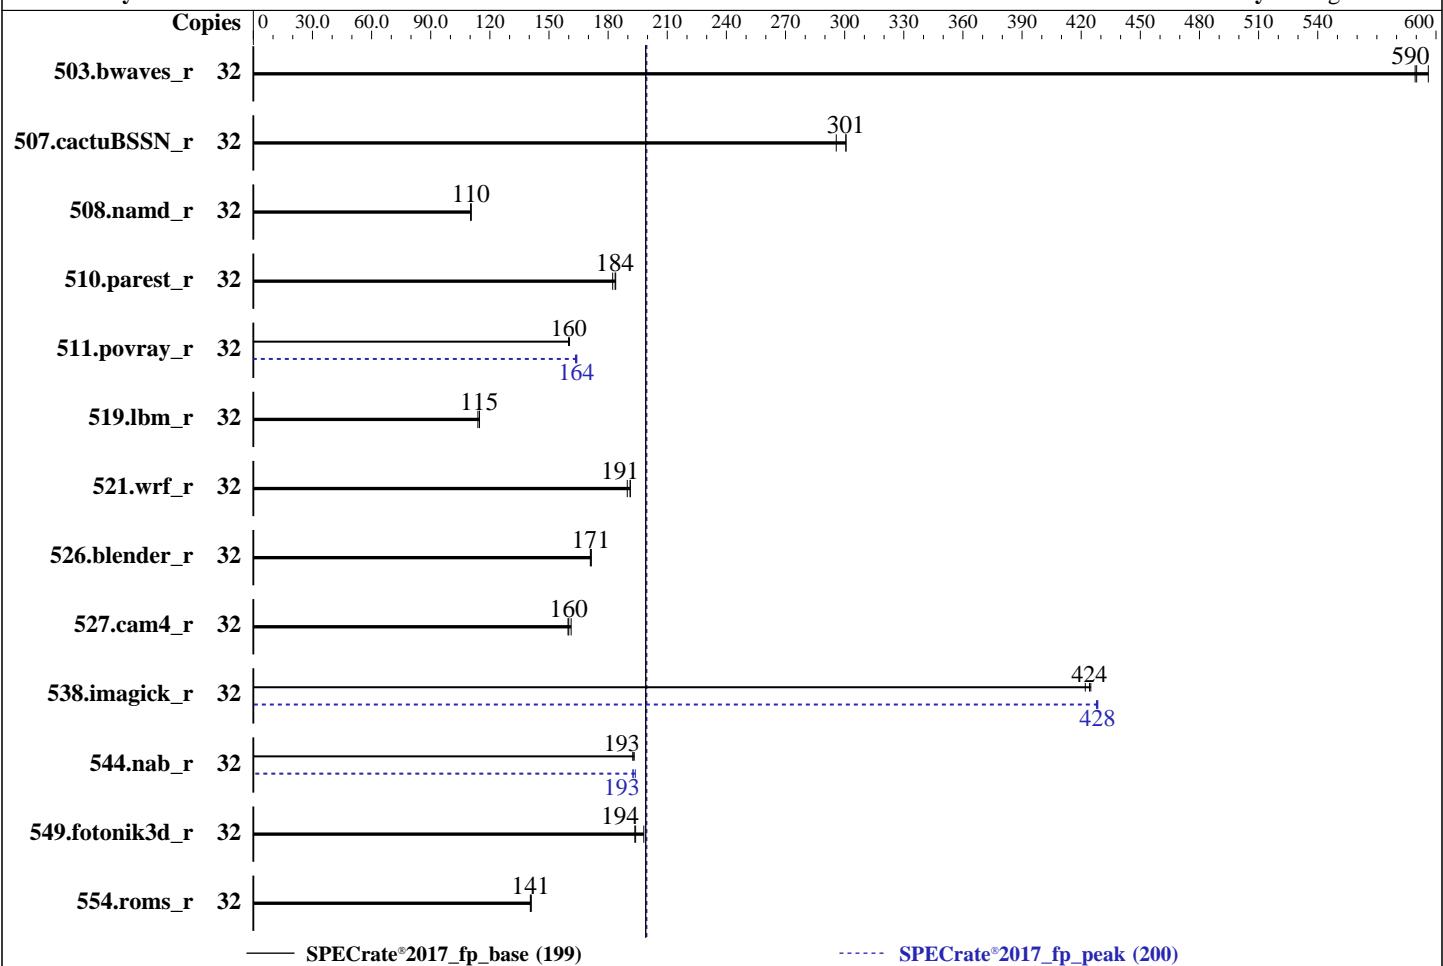

— Specrate®2017\_fp\_base (199)

----- Specrate®2017\_fp\_peak (200)

## Hardware

CPU Name: AMD EPYC 7F32  
Max MHz: 3900  
Nominal: 3700  
Enabled: 16 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 128 MB I+D on chip per chip,  
16 MB per core  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 800 GB SAS SSD, RAID 0  
Other: None

OS: SUSE Linux Enterprise Server 15 (x86\_64) SP1  
Kernel 4.12.14-195-default  
Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
Parallel: No  
Firmware: HPE BIOS Version A42 12/12/2019 released Dec-2019  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc: jemalloc memory allocator library v5.2.0  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

**SPECrate®2017\_fp\_base = 199**

**SPECrate®2017\_fp\_peak = 200**

CPU2017 License: 3

Test Date: Mar-2020

Test Sponsor: HPE

Hardware Availability: Dec-2019

Tested by: HPE

Software Availability: Aug-2019

## Results Table

| Benchmark        | Base   |            |            |            |            |            |            |        | Peak       |            |            |            |            |            |         |       |
|------------------|--------|------------|------------|------------|------------|------------|------------|--------|------------|------------|------------|------------|------------|------------|---------|-------|
|                  | Copies | Seconds    | Ratio      | Seconds    | Ratio      | Seconds    | Ratio      | Copies | Seconds    | Ratio      | Seconds    | Ratio      | Seconds    | Ratio      | Seconds | Ratio |
| 503.bwaves_r     | 32     | 544        | 589        | <b>544</b> | <b>590</b> | 538        | 596        | 32     | 544        | 589        | <b>544</b> | <b>590</b> | 538        | 596        |         |       |
| 507.cactusBSSN_r | 32     | 137        | 296        | 135        | 301        | <b>135</b> | <b>301</b> | 32     | 137        | 296        | 135        | 301        | <b>135</b> | <b>301</b> |         |       |
| 508.namd_r       | 32     | 275        | 111        | 276        | 110        | <b>275</b> | <b>110</b> | 32     | 275        | 111        | 276        | 110        | <b>275</b> | <b>110</b> |         |       |
| 510.parest_r     | 32     | <b>456</b> | <b>184</b> | 459        | 182        | 455        | 184        | 32     | <b>456</b> | <b>184</b> | 459        | 182        | 455        | 184        |         |       |
| 511.povray_r     | 32     | 466        | 160        | <b>467</b> | <b>160</b> | 467        | 160        | 32     | <b>456</b> | <b>164</b> | 455        | 164        | 457        | 163        |         |       |
| 519.lbm_r        | 32     | 294        | 115        | 296        | 114        | <b>294</b> | <b>115</b> | 32     | 294        | 115        | 296        | 114        | <b>294</b> | <b>115</b> |         |       |
| 521.wrf_r        | 32     | <b>375</b> | <b>191</b> | 378        | 190        | 375        | 191        | 32     | <b>375</b> | <b>191</b> | 378        | 190        | 375        | 191        |         |       |
| 526.blender_r    | 32     | <b>285</b> | <b>171</b> | 285        | 171        | 284        | 171        | 32     | <b>285</b> | <b>171</b> | 285        | 171        | 284        | 171        |         |       |
| 527.cam4_r       | 32     | 351        | 160        | <b>350</b> | <b>160</b> | 347        | 161        | 32     | 351        | 160        | <b>350</b> | <b>160</b> | 347        | 161        |         |       |
| 538.imagick_r    | 32     | <b>188</b> | <b>424</b> | 189        | 422        | 187        | 425        | 32     | 186        | 428        | 186        | 428        | <b>186</b> | <b>428</b> |         |       |
| 544.nab_r        | 32     | 280        | 193        | 279        | 193        | <b>280</b> | <b>193</b> | 32     | <b>280</b> | <b>193</b> | 278        | 194        | 280        | 193        |         |       |
| 549.fotonik3d_r  | 32     | 644        | 194        | 629        | 198        | <b>643</b> | <b>194</b> | 32     | 644        | 194        | 629        | 198        | <b>643</b> | <b>194</b> |         |       |
| 554.roms_r       | 32     | <b>361</b> | <b>141</b> | 361        | 141        | 362        | 141        | 32     | <b>361</b> | <b>141</b> | 361        | 141        | 362        | 141        |         |       |

**SPECrate®2017\_fp\_base = 199**

**SPECrate®2017\_fp\_peak = 200**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

**SPECrate®2017\_fp\_base = 199**

**SPECrate®2017\_fp\_peak = 200**

CPU2017 License: 3

**Test Date:** Mar-2020

Test Sponsor: HPE

**Hardware Availability:** Dec-2019

Tested by: HPE

**Software Availability:** Aug-2019

## Operating System Notes (Continued)

`dirty_ratio`, `swappiness`, `zone_reclaim_mode` and `drop_caches` were all set using privileged echo (e.g. `echo 1 > /proc/sys/vm/swappiness`).

Transparent huge pages set to 'always' for this run (OS default)

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-bbn/amd_rate_aocc200_rome_C_lib/64;/home/cpu2017-bbn/amd_
     rate_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fllto  
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS Configuration

Thermal Configuration set to Maximum Cooling

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Minimum Processor Idle Power Core C-State set to C6 State

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Throughput Compute

NUMA memory domains per socket set to Four memory domains per socket

C-State Efficiency mode set to Enabled

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 200

CPU2017 License: 3

Test Date: Mar-2020

Test Sponsor: HPE

Hardware Availability: Dec-2019

Tested by: HPE

Software Availability: Aug-2019

## Platform Notes (Continued)

```
Sysinfo program /home/cpu2017-bbn/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-30t0 Fri Feb 15 01:37:26 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7F32 8-Core Processor
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 8
  siblings   : 16
  physical 0: cores 0 4 8 12 16 20 24 28
  physical 1: cores 0 4 8 12 16 20 24 28
```

```
From lscpu:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          48 bits physical, 48 bits virtual
CPU(s):                 32
On-line CPU(s) list:    0-31
Thread(s) per core:     2
Core(s) per socket:      8
Socket(s):              2
NUMA node(s):            8
Vendor ID:               AuthenticAMD
CPU family:              23
Model:                  49
Model name:              AMD EPYC 7F32 8-Core Processor
Stepping:                0
CPU MHz:                 3693.001
BogoMIPS:                7386.00
Virtualization:          AMD-V
L1d cache:                32K
L1i cache:                32K
L2 cache:                 512K
L3 cache:                 16384K
NUMA node0 CPU(s):        0,1,16,17
NUMA node1 CPU(s):        2,3,18,19
NUMA node2 CPU(s):        4,5,20,21
NUMA node3 CPU(s):        6,7,22,23
NUMA node4 CPU(s):        8,9,24,25
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 200

CPU2017 License: 3

Test Date: Mar-2020

Test Sponsor: HPE

Hardware Availability: Dec-2019

Tested by: HPE

Software Availability: Aug-2019

## Platform Notes (Continued)

NUMA node5 CPU(s): 10,11,26,27  
NUMA node6 CPU(s): 12,13,28,29  
NUMA node7 CPU(s): 14,15,30,31  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good nopl xtTopology nonstop\_tsc cpuid extd\_apicid aperfmpf perf pni pclmulqdq monitor ssse3 fma cx16 sse4\_1 sse4\_2 movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_l2 mwaitx cpb cat\_13 cdp\_13 hw\_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 cqmq rdta rdseed adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqmq\_llc cqmq\_occup\_llc cqmq\_mbm\_total cqmq\_mbm\_local clzero irperf xsaveerptr arat npt lbrv svm\_lock nrrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic v\_vmsave\_vmlload vgif umip rdpid overflow\_recov succor smca

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0 1 16 17  
node 0 size: 128711 MB  
node 0 free: 128535 MB  
node 1 cpus: 2 3 18 19  
node 1 size: 129022 MB  
node 1 free: 128877 MB  
node 2 cpus: 4 5 20 21  
node 2 size: 129022 MB  
node 2 free: 128877 MB  
node 3 cpus: 6 7 22 23  
node 3 size: 129010 MB  
node 3 free: 128733 MB  
node 4 cpus: 8 9 24 25  
node 4 size: 129022 MB  
node 4 free: 128897 MB  
node 5 cpus: 10 11 26 27  
node 5 size: 129022 MB  
node 5 free: 128889 MB  
node 6 cpus: 12 13 28 29  
node 6 size: 128993 MB  
node 6 free: 128868 MB  
node 7 cpus: 14 15 30 31  
node 7 size: 129022 MB  
node 7 free: 128897 MB  
node distances:  
node 0 1 2 3 4 5 6 7

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

**SPECrate®2017\_fp\_base = 199**

**SPECrate®2017\_fp\_peak = 200**

CPU2017 License: 3

Test Date: Mar-2020

Test Sponsor: HPE

Hardware Availability: Dec-2019

Tested by: HPE

Software Availability: Aug-2019

## Platform Notes (Continued)

```
0: 10 12 12 12 32 32 32 32
1: 12 10 12 12 32 32 32 32
2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10
```

From /proc/meminfo

```
MemTotal: 1056591100 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-30t0 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

|   |   |
|---|---|
| CVE-2018-3620 (L1 Terminal Fault):        | Not affected  |
| Microarchitectural Data Sampling:         | Not affected  |
| CVE-2017-5754 (Meltdown):                 | Not affected  |
| CVE-2018-3639 (Speculative Store Bypass): | Mitigation: Speculative Store Bypass disabled via prctl and seccomp                         |
| CVE-2017-5753 (Spectre variant 1):        | Mitigation: __user pointer sanitization   |
| CVE-2017-5715 (Spectre variant 2):        | Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling |

run-level 3 Feb 14 19:51

SPEC is set to: /home/cpu2017-bbn

| Filesystem | Type  | Size | Used | Avail | Use% | Mounted on |
|------------|-------|------|------|-------|------|------------|
| /dev/sdc2  | btrfs | 743G | 26G  | 717G  | 4%   | /home      |

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
BIOS:      HPE A42 12/12/2019
Vendor:    HPE
Product:   ProLiant DL385 Gen10 Plus
Product Family: ProLiant
Serial:    CN79310517
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
16x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200
16x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
           | 544.nab_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

```
=====
C++          | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

```
=====
C++, C       | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

Target: x86\_64-unknown-linux-gnu

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

=====

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)

| 554.roms\_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

=====

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

**SPECrate®2017\_fp\_base = 199**

**SPECrate®2017\_fp\_peak = 200**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Mar-2020

**Hardware Availability:** Dec-2019

**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

```
InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
    AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin
```

---

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 200

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

**SPECrate®2017\_fp\_base = 199**

**SPECrate®2017\_fp\_peak = 200**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Mar-2020

**Hardware Availability:** Dec-2019

**Software Availability:** Aug-2019

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -flang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -flang
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes

538.imagick_r: -futo -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(3.70 GHz, AMD EPYC 7F32)

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

```
526.blender_r: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
507.cactuBSSN_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revH.html>  
<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revH.xml>  
<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-02-14 15:07:25-0500.

Report generated on 2020-04-28 15:29:57 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-28.