



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

CPU2017 License: 9016


Test Date: Apr-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

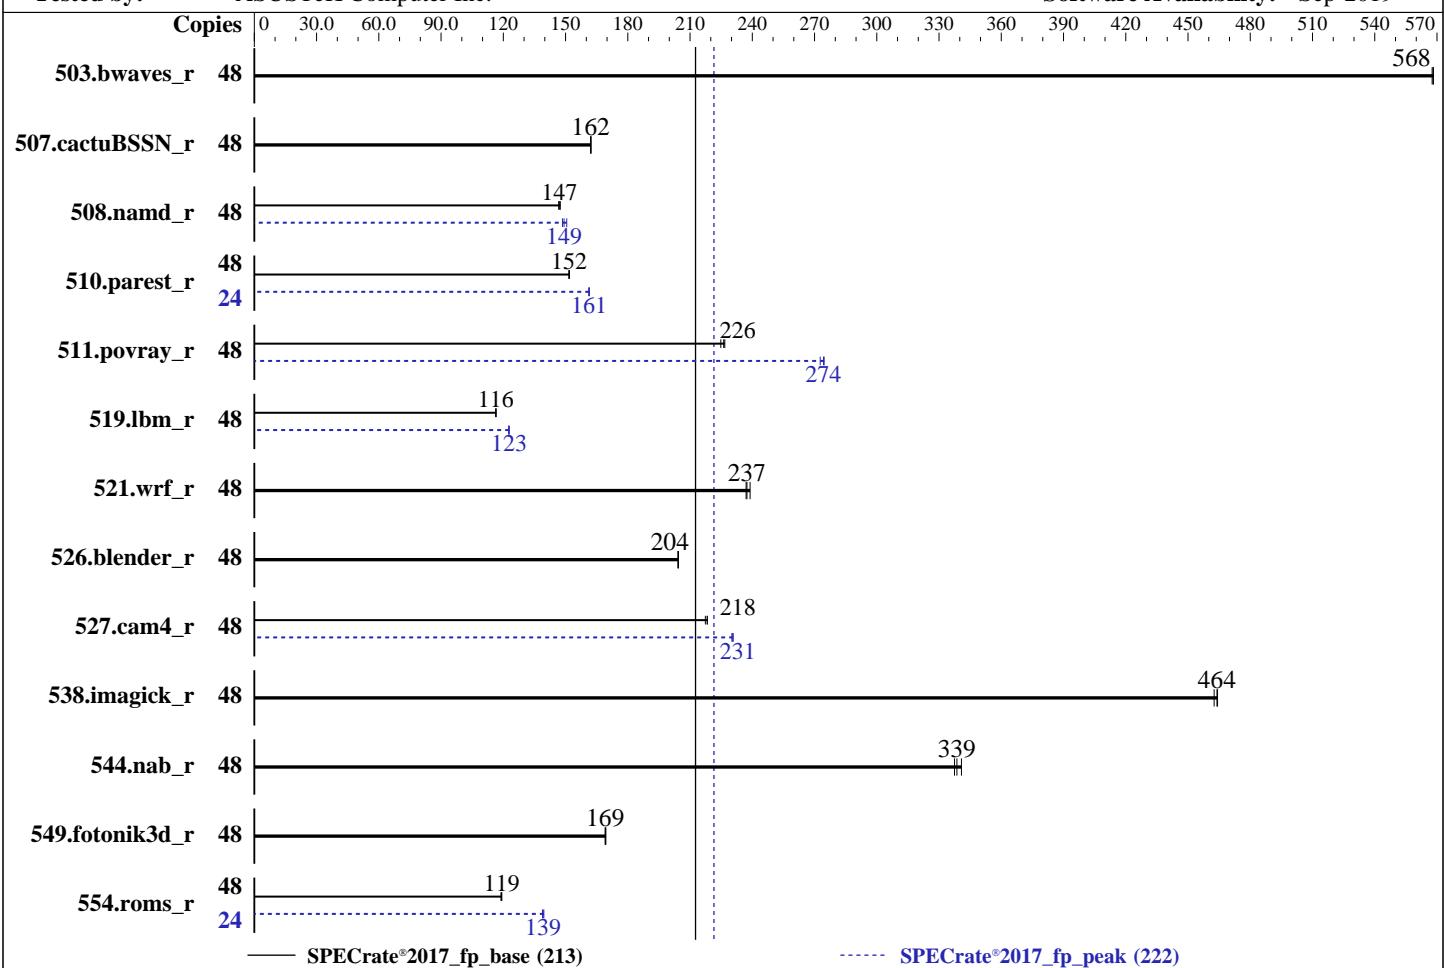

— SPECrate®2017_fp_base (213)

····· SPECrate®2017_fp_peak (222)

Hardware

CPU Name: Intel Xeon Gold 6256
Max MHz: 4500
Nominal: 3600
Enabled: 24 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 33 MB I+D on chip per chip
Other: None
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage: 1 x 1 TB SATA SSD
Other: None

OS:

SUSE Linux Enterprise Server 15 SP1
Kernel 4.12.14-195-default

Compiler:

C/C++: Version 19.0.5.281 of Intel C/C++
Compiler Build 20190815 for Linux;
Fortran: Version 19.0.5.281 of Intel Fortran
Compiler Build 20190815 for Linux

Parallel:

No

Firmware:

Version 6102 released Dec-2019

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

None

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage

Software

SUSE Linux Enterprise Server 15 SP1

Kernel 4.12.14-195-default

C/C++: Version 19.0.5.281 of Intel C/C++
Compiler Build 20190815 for Linux;
Fortran: Version 19.0.5.281 of Intel Fortran
Compiler Build 20190815 for Linux



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

CPU2017 License: 9016

Test Date: Apr-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	847	568	847	568	848	568	48	847	568	847	568	848	568	848	568
507.cactusBSSN_r	48	375	162	374	162	375	162	48	375	162	374	162	375	162	375	162
508.namd_r	48	309	147	310	147	311	147	48	307	149	305	149	303	151	303	151
510.parest_r	48	827	152	828	152	828	152	24	389	161	389	161	389	161	389	161
511.povray_r	48	499	225	495	226	494	227	48	411	273	408	275	409	274	409	274
519.lbm_r	48	435	116	434	117	435	116	48	412	123	412	123	413	123	413	123
521.wrf_r	48	454	237	453	237	450	239	48	454	237	453	237	450	239	450	239
526.blender_r	48	358	204	358	204	358	204	48	358	204	358	204	358	204	358	204
527.cam4_r	48	386	217	385	218	385	218	48	364	231	364	231	365	230	365	230
538.imagick_r	48	258	463	257	464	257	464	48	258	463	257	464	257	464	257	464
544.nab_r	48	239	339	239	337	237	341	48	239	339	239	337	237	341	237	341
549.fotonik3d_r	48	1106	169	1106	169	1104	169	48	1106	169	1106	169	1104	169	1104	169
554.roms_r	48	642	119	640	119	640	119	24	273	140	274	139	275	139	275	139

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017_19u5/lib/intel64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

CPU2017 License: 9016

Test Date: Apr-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

General Notes (Continued)

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

ENERGY_PERF_BIAS_CFG mode = performance

SNC = Enabled

IMC interleaving = 1-way

Engine Boost = Level3(Max)

Enforce POR = Disable

Memory Frequency = 2933

LLC dead line allc = Disabled

SR-IOV Support = Disabled

CSM Support = Disabled

```
Sysinfo program /spec2017_19u5/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on linux-628j Tue Apr 14 16:49:00 2020
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz
```

```
2 "physical id"s (chips)
```

```
48 "processors"
```

```
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
```

```
cpu cores : 12
```

```
siblings : 24
```

```
physical 0: cores 0 3 10 12 13 16 17 21 25 26 27 29
```

```
physical 1: cores 2 4 5 9 11 13 16 18 21 24 26 28
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

CPU2017 License: 9016

Test Date: Apr-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

Platform Notes (Continued)

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
Address sizes:        46 bits physical, 48 bits virtual
CPU(s):               48
On-line CPU(s) list: 0-47
Thread(s) per core:   2
Core(s) per socket:   12
Socket(s):            2
NUMA node(s):         4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz
Stepping:              7
CPU MHz:              3600.000
CPU max MHz:          4500.0000
CPU min MHz:          1200.0000
BogoMIPS:              7200.00
Virtualization:       VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              33792K
NUMA node0 CPU(s):    0,2,5,6,8,9,24,26,29,30,32,33
NUMA node1 CPU(s):    1,3,4,7,10,11,25,27,28,31,34,35
NUMA node2 CPU(s):    12,15,18,19,21,22,36,39,42,43,45,46
NUMA node3 CPU(s):    13,14,16,17,20,23,37,38,40,41,44,47
Flags:                 fpu vme de pse tsc msr pae cx8 apic sep mtrr pge mca cmov
                       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
                       aperfmpf perf_pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                       xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                       avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
                       invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                       flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
                       cqmq mpq rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
                       avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occu_llc cqmq_mbmm_total
                       cqmq_mbmm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
                       ospke avx512_vnni md_clear flush_l1d arch_capabilities
```

/proc/cpuinfo cache data
cache size : 33792 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

CPU2017 License: 9016

Test Date: Apr-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

Platform Notes (Continued)

```
available: 4 nodes (0-3)
node 0 cpus: 0 2 5 6 8 9 24 26 29 30 32 33
node 0 size: 192080 MB
node 0 free: 191273 MB
node 1 cpus: 1 3 4 7 10 11 25 27 28 31 34 35
node 1 size: 193533 MB
node 1 free: 192877 MB
node 2 cpus: 12 15 18 19 21 22 36 39 42 43 45 46
node 2 size: 193533 MB
node 2 free: 192567 MB
node 3 cpus: 13 14 16 17 20 23 37 38 40 41 44 47
node 3 size: 193503 MB
node 3 free: 192876 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10
```

```
From /proc/meminfo
MemTotal:      791194000 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-628j 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

CPU2017 License: 9016

Test Date: Apr-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):

Mitigation: user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling

run-level 3 Apr 13 19:25

SPEC is set to: /spec2017_19u5

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	932G	19G	913G	3%	/

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 6102 12/19/2019
Vendor: ASUSTeK COMPUTER INC.
Product: Z11PG-D24 Series
Product Family: Server
Serial: System Serial Number

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

CPU2017 License: 9016

Test Date: Apr-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

Compiler Version Notes (Continued)

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactubSSN_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

CPU2017 License: 9016

Test Date: Apr-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

C++ benchmarks:

-m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Sep-2019

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using both C and C++:

```
icpc icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

CPU2017 License: 9016

Test Date: Apr-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

```
508.namd_r: -m64 -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

```
510.parest_r: -m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -m64 -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

```
527.cam4_r: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 222

CPU2017 License: 9016

Test Date: Apr-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

```
526.blender_r: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
507.cactuBSSN_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revF.html>
http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revF.xml>
http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-14 04:48:59-0400.

Report generated on 2021-01-04 18:01:31 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-12.