



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6248R)

SPECrate®2017_int_base = 324

SPECrate®2017_int_peak = 338

CPU2017 License: 001176


Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

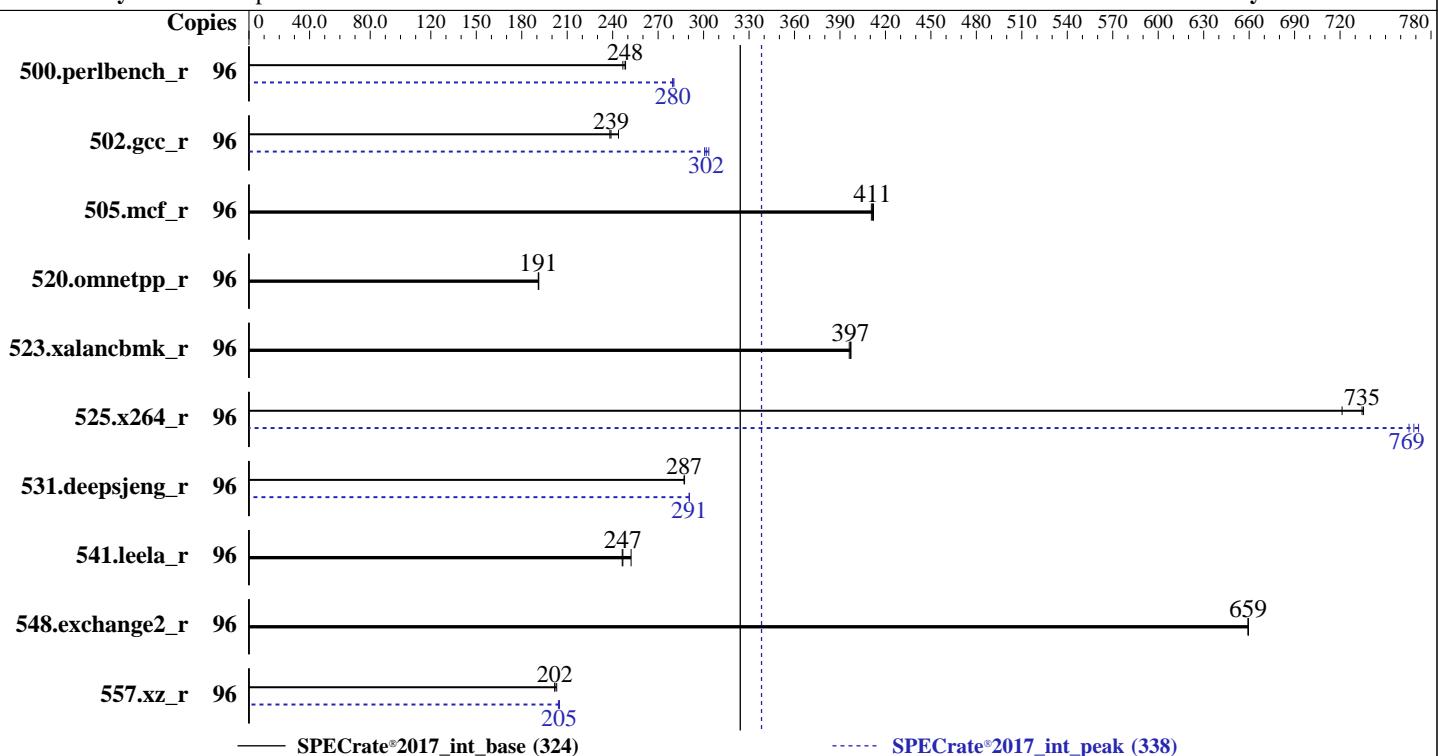

Hardware

CPU Name: Intel Xeon Gold 6248R
Max MHz: 4000
Nominal: 3000
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 35.75 MB I+D on chip per chip
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)
Storage: 1 x 200 GB SATA III SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.1
Compiler: Kernel 4.18.0-147.el8.x86_64
C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux;
Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Version 3.3 released Feb-2020
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6248R)

SPECrate®2017_int_base = 324

SPECrate®2017_int_peak = 338

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	619	247	616	248	615	249	96	545	280	546	280	547	279
502.gcc_r	96	569	239	557	244	571	238	96	452	301	450	302	448	303
505.mcf_r	96	378	411	376	412	377	411	96	378	411	376	412	377	411
520.omnetpp_r	96	659	191	660	191	659	191	96	659	191	660	191	659	191
523.xalancbmk_r	96	255	397	255	397	256	396	96	255	397	255	397	256	396
525.x264_r	96	229	735	229	735	233	721	96	220	766	219	769	218	772
531.deepsjeng_r	96	383	287	383	287	383	287	96	379	291	379	291	378	291
541.leela_r	96	645	246	644	247	630	252	96	645	246	644	247	630	252
548.exchange2_r	96	381	659	381	659	381	659	96	381	659	381	659	381	659
557.xz_r	96	511	203	514	202	514	202	96	506	205	508	204	506	205

SPECrate®2017_int_base = 324

SPECrate®2017_int_peak = 338

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-
    32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6248R)

SPECCrate®2017_int_base = 324

SPECCrate®2017_int_peak = 338

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode = Extreme Performance

SNC = Enable

Stale AtoS = Disable

IMC Interleaving = 1-way Interleave

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on RHEL81-01 Tue May 5 13:16:35 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6248R CPU @ 3.00GHz
  2 "physical id"s (chips)
  96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 24
  siblings   : 48
  physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
```

From lscpu:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6248R)

SPECrate®2017_int_base = 324

SPECrate®2017_int_peak = 338

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

Platform Notes (Continued)

Byte Order: Little Endian
CPU(s): 96
On-line CPU(s) list: 0-95
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6248R CPU @ 3.00GHz
Stepping: 7
CPU MHz: 3599.958
CPU max MHz: 4000.0000
CPU min MHz: 1200.0000
BogoMIPS: 6000.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7,8,12-14,18-20,48-51,55,56,60-62,66-68
NUMA node1 CPU(s): 4-6,9-11,15-17,21-23,52-54,57-59,63-65,69-71
NUMA node2 CPU(s): 24-27,31-33,37-39,43,44,72-75,79-81,85-87,91,92
NUMA node3 CPU(s): 28-30,34-36,40-42,45-47,76-78,82-84,88-90,93-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 36608 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 12 13 14 18 19 20 48 49 50 51 55 56 60 61 62 66 67 68
node 0 size: 95348 MB
node 0 free: 95097 MB
node 1 cpus: 4 5 6 9 10 11 15 16 17 21 22 23 52 53 54 57 58 59 63 64 65 69 70 71

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6248R)

SPECrate®2017_int_base = 324

SPECrate®2017_int_peak = 338

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

Platform Notes (Continued)

```
node 1 size: 96763 MB
node 1 free: 95449 MB
node 2 cpus: 24 25 26 27 31 32 33 37 38 39 43 44 72 73 74 75 79 80 81 85 86 87 91 92
node 2 size: 96763 MB
node 2 free: 96599 MB
node 3 cpus: 28 29 30 34 35 36 40 41 42 45 46 47 76 77 78 82 83 84 88 89 90 93 94 95
node 3 size: 96737 MB
node 3 free: 96573 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10
```

```
From /proc/meminfo
MemTotal:      394866588 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.1 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.1"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

```
uname -a:
Linux RHEL81-01 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6248R)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 324

SPECrate®2017_int_peak = 338

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling

run-level 3 May 5 13:15

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	185G	13G	173G	7%	/

From /sys/devices/virtual/dmi/id

 BIOS: American Megatrends Inc. 3.3 02/21/2020

 Vendor: Supermicro

 Product: Super Server

 Serial: 0123456789

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

 12x NO DIMM NO DIMM

 12x SK Hynix HMA84GR7CJR4N-WM 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(peak) 557.xz_r(peak)

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6248R)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 324

SPECrate®2017_int_peak = 338

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6248R)

SPECrate®2017_int_base = 324

SPECrate®2017_int_peak = 338

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

Compiler Version Notes (Continued)

=====

C | 500.perlbench_r(peak) 557.xz_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6248R)

SPECrate®2017_int_base = 324

SPECrate®2017_int_peak = 338

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Base Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -fllto
-mfpmath=sse -funroll-loops -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -fllto -mfpmath=sse
-funroll-loops -qnextgen -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6248R)

SPECrate®2017_int_base = 324

SPECrate®2017_int_peak = 338

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -flto -O3
-ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6248R)

SPECCrate®2017_int_base = 324

SPECCrate®2017_int_peak = 338

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: -m64 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revG.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revG.xml>

SPEC CPU and SPECCrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-05 01:16:34-0400.

Report generated on 2020-05-26 14:52:42 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-26.