



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 57.7

SPECSpeed®2017_fp_peak = 58.4

CPU2017 License: 55


Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

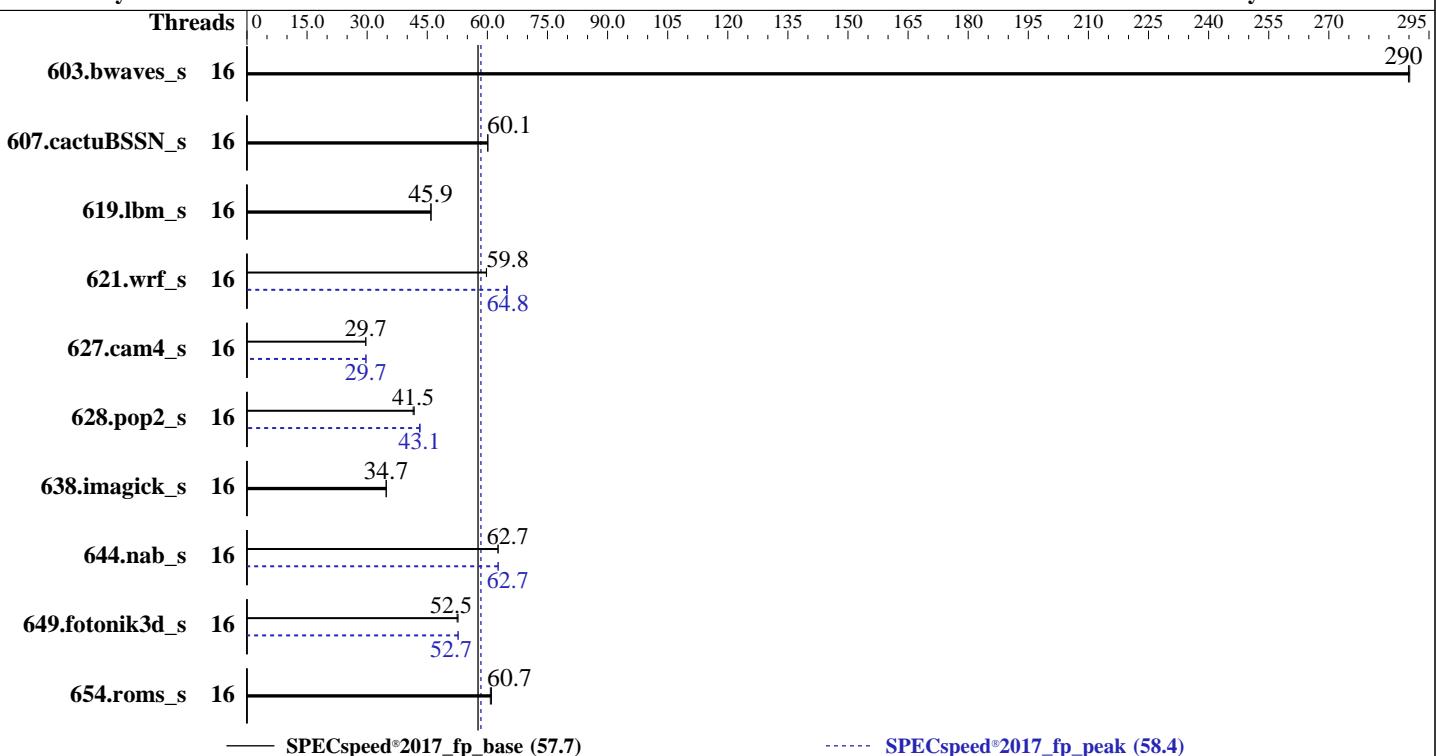

Hardware		Software	
CPU Name:	Intel Xeon Bronze 3206R	OS:	Red Hat Enterprise Linux 8.1
Max MHz:	1900		kernel 4.18.0-147.el8.x86_64
Nominal:	1900	Compiler:	C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux;
Enabled:	16 cores, 2 chips		Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux
Orderable:	1,2 chips	Parallel:	Yes
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 2.7.7 released May-2020
L2:	1 MB I+D on chip per core	File System:	tmpfs
L3:	11 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2933V-R, running at 2133)	Peak Pointers:	64-bit
Storage:	1 x 1.92 TB SATA SSD	Other:	None
Other:	None	Power Management:	BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 57.7

SPECSpeed®2017_fp_peak = 58.4

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2020
Hardware Availability: Jul-2020
Software Availability: Nov-2019

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	204	290	203	290			16	204	290	203	290				
607.cactuBSSN_s	16	277	60.1	<u>277</u>	<u>60.1</u>			16	277	60.1	<u>277</u>	<u>60.1</u>				
619.lbm_s	16	<u>114</u>	<u>45.9</u>	114	46.0			16	<u>114</u>	<u>45.9</u>	114	46.0				
621.wrf_s	16	221	59.8	<u>221</u>	<u>59.8</u>			16	204	65.0	204	64.8				
627.cam4_s	16	299	29.7	299	29.7			16	299	29.7	298	29.7				
628.pop2_s	16	286	41.5	284	41.7			16	<u>275</u>	<u>43.2</u>	276	43.1				
638.imagick_s	16	415	34.7	415	34.8			16	<u>415</u>	<u>34.7</u>	415	34.8				
644.nab_s	16	<u>279</u>	<u>62.7</u>	279	62.7			16	<u>279</u>	<u>62.7</u>	279	62.7				
649.fotonik3d_s	16	173	52.7	<u>174</u>	<u>52.5</u>			16	173	52.7	<u>173</u>	<u>52.7</u>				
654.roms_s	16	259	60.7	258	61.0			16	<u>259</u>	<u>60.7</u>	258	61.0				
SPECSpeed®2017_fp_base =				57.7				SPECSpeed®2017_fp_peak =				58.4				

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017/lib/intel64"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Benchmark run from a 225 GB ramdisk created with the cmd: "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 57.7

PowerEdge R640 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECSpeed®2017_fp_peak = 58.4

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Platform Notes

BIOS settings:

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub set to standard

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

UPI Prefetch enabled

LLC Prefetch disabled

Dead Line LLC Alloc enabled

Directory AtoS disabled

Sysinfo program /mnt/ramdisk/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011

running on rhel-8-1-sut Fri May 22 16:46:40 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 16

On-line CPU(s) list: 0-15

Thread(s) per core: 1

Core(s) per socket: 8

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 57.7

SPECspeed®2017_fp_peak = 58.4

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2020
Hardware Availability: Jul-2020
Software Availability: Nov-2019

Platform Notes (Continued)

Model: 85
Model name: Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz
Stepping: 7
CPU MHz: 1607.523
CPU max MHz: 1900.0000
CPU min MHz: 1000.0000
BogoMIPS: 3800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 11264K
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm arat pln pts pku ospke avx512_vnni md_clear flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 11264 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14
node 0 size: 192050 MB
node 0 free: 186013 MB
node 1 cpus: 1 3 5 7 9 11 13 15
node 1 size: 193533 MB
node 1 free: 175419 MB
node distances:
node 0 1
0: 10 21
1: 21 10

From /proc/meminfo
MemTotal: 394837836 kB
HugePages_Total: 0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 57.7

PowerEdge R640 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECSpeed®2017_fp_peak = 58.4

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Platform Notes (Continued)

Hugepagesize: 2048 kB

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.1 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.1"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

uname -a:

```
Linux rhel-8-1-sut 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 May 22 10:26 last=5

```
SPEC is set to: /mnt/ramdisk/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs          tmpfs  200G   14G  187G    7% /mnt/ramdisk
```

```
From /sys/devices/virtual/dmi/id
BIOS:      Dell Inc. 2.7.7 05/04/2020
Vendor:    Dell Inc.
Product:   PowerEdge R640
Product Family: PowerEdge
Serial:   FPFXCH2
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 57.7

PowerEdge R640 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECSpeed®2017_fp_peak = 58.4

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

10x 002C069D002C 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933
4x 00AD00B300AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933
8x 00AD00B300AD HMA82GR7CJR8N-XN 16 GB 2 rank 3200
2x 00AD063200AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
              | 644.nab_s(base, peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 607.cactubssn_s(base, peak)
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
Fortran      | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
              | 654.roms_s(base, peak)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
Fortran, C    | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 57.7

PowerEdge R640 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECspeed®2017_fp_peak = 58.4

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Compiler Version Notes (Continued)

| 628.pop2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 57.7

PowerEdge R640 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECSpeed®2017_fp_peak = 58.4

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-m64 -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R640 (Intel Xeon Bronze 3206R, 1.90 GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECSpeed®2017_fp_base = 57.7

SPECSpeed®2017_fp_peak = 58.4

Test Date: May-2020

Hardware Availability: Jul-2020

Software Availability: Nov-2019

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-qopenmp -DSPEC_OPENMP

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: -m64 -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-prefetch -ipo -O3 -ffinite-math-only
-no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

627.cam4_s: -m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 57.7

PowerEdge R640 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECSpeed®2017_fp_peak = 58.4

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-22 17:46:39-0400.

Report generated on 2020-06-09 16:09:10 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-09.