



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 144

PowerEdge R640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_peak = 151

CPU2017 License: 55


Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

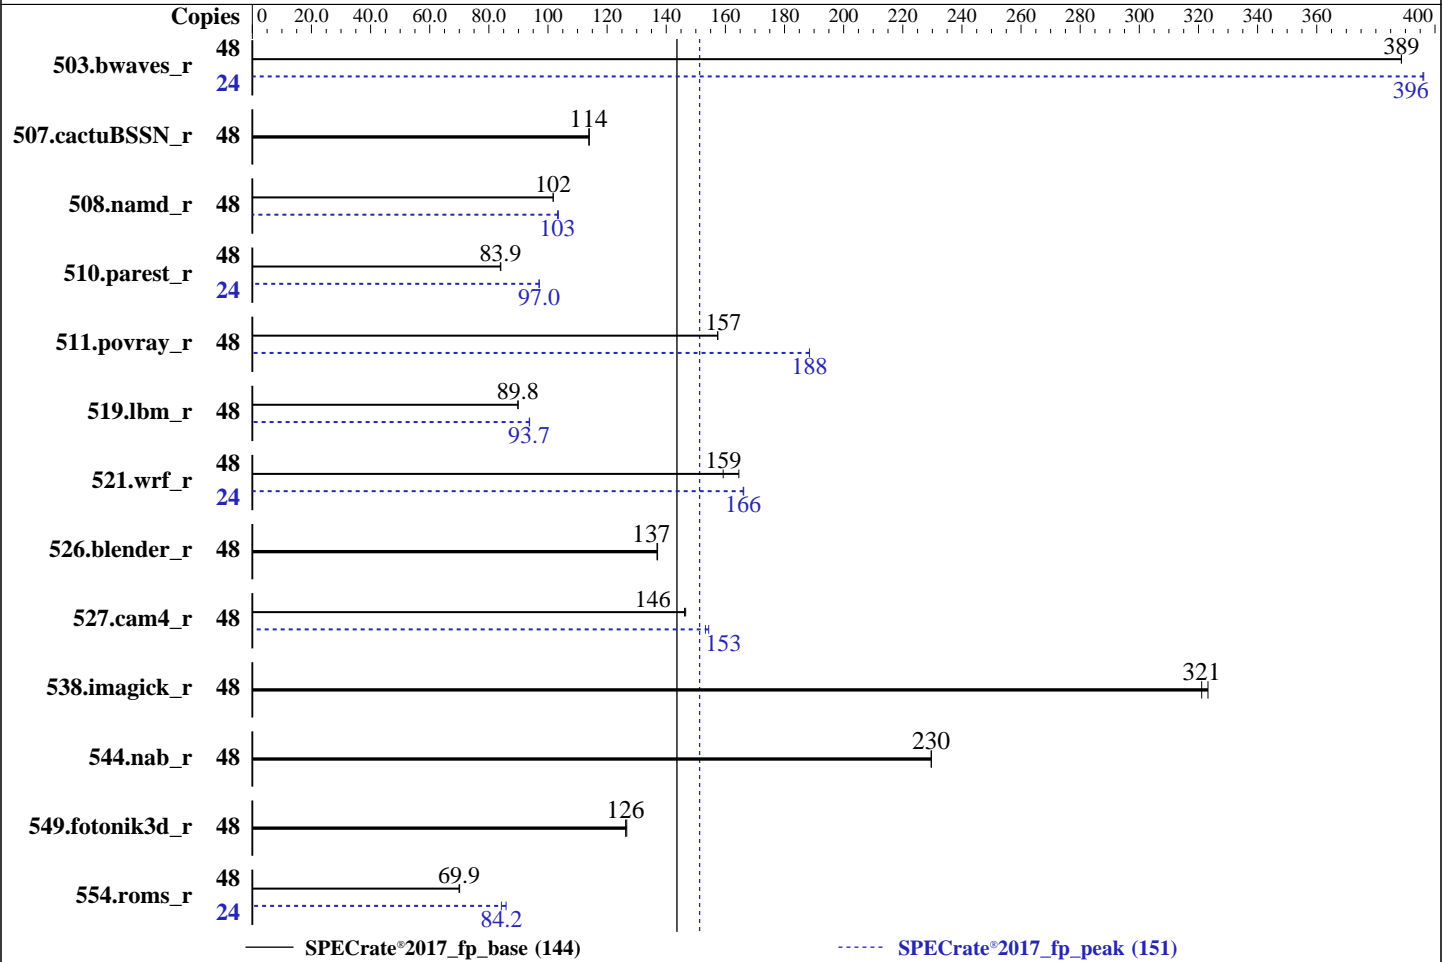

Hardware

CPU Name: Intel Xeon Silver 4214R
 Max MHz: 3500
 Nominal: 2400
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 16.5 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933V-R, running at 2400)
 Storage: 1 x 1.92 TB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 8.1
 kernel 4.18.0-147.el8.x86_64
 Compiler: C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 2.5.4 released Jan-2020
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 144

PowerEdge R640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_peak = 151

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1239	389	<u>1239</u>	<u>389</u>			24	607	396	<u>608</u>	<u>396</u>		
507.cactuBSSN_r	48	<u>534</u>	<u>114</u>	533	114			48	<u>534</u>	<u>114</u>	533	114		
508.namd_r	48	<u>448</u>	<u>102</u>	448	102			48	441	104	<u>442</u>	<u>103</u>		
510.parest_r	48	1494	84.0	<u>1497</u>	<u>83.9</u>			24	647	97.0	<u>647</u>	<u>97.0</u>		
511.povray_r	48	<u>712</u>	<u>157</u>	712	157			48	595	188	<u>595</u>	<u>188</u>		
519.lbm_r	48	<u>564</u>	<u>89.8</u>	563	89.9			48	<u>540</u>	<u>93.7</u>	539	93.8		
521.wrf_r	48	653	165	<u>675</u>	<u>159</u>			24	<u>324</u>	<u>166</u>	323	166		
526.blender_r	48	<u>534</u>	<u>137</u>	533	137			48	<u>534</u>	<u>137</u>	533	137		
527.cam4_r	48	573	147	<u>574</u>	<u>146</u>			48	544	154	<u>548</u>	<u>153</u>		
538.imagick_r	48	<u>372</u>	<u>321</u>	369	323			48	<u>372</u>	<u>321</u>	369	323		
544.nab_r	48	<u>352</u>	<u>230</u>	352	230			48	<u>352</u>	<u>230</u>	352	230		
549.fotonik3d_r	48	1477	127	<u>1482</u>	<u>126</u>			48	1477	127	<u>1482</u>	<u>126</u>		
554.roms_r	48	<u>1091</u>	<u>69.9</u>	1088	70.1			24	444	85.8	<u>453</u>	<u>84.2</u>		

SPECrate®2017_fp_base = 144

SPECrate®2017_fp_peak = 151

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017/lib/intel64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 144

PowerEdge R640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Benchmark run from a 225 GB ramdisk created with the cmd: "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub set to standard

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

UPI Prefetch enabled

LLC Prefetch disabled

Dead Line LLC Alloc enabled

Directory AtoS disabled

Sysinfo program /mnt/ramdisk/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on rhel-8-1-sut Thu May 14 22:50:52 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4214R CPU @ 2.40GHz
```

```
2 "physical id"s (chips)
```

```
48 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 144

PowerEdge R640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_peak = 151

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Platform Notes (Continued)

```

siblings : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 48
On-line CPU(s) list:   0-47
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Silver 4214R CPU @ 2.40GHz
Stepping:               7
CPU MHz:                3197.886
CPU max MHz:            3500.0000
CPU min MHz:            1000.0000
BogoMIPS:               4800.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               16896K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s):     1,5,9,13,17,21,25,29,33,37,41,45
NUMA node2 CPU(s):     2,6,10,14,18,22,26,30,34,38,42,46
NUMA node3 CPU(s):     3,7,11,15,19,23,27,31,35,39,43,47
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 144

PowerEdge R640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 95306 MB
node 0 free: 94798 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 1 size: 96739 MB
node 1 free: 96286 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 2 size: 96765 MB
node 2 free: 81087 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 96764 MB
node 3 free: 96446 MB
node distances:
node  0  1  2  3
 0:  10  21  11  21
 1:  21  10  21  11
 2:  11  21  10  21
 3:  21  11  21  10

```

```

From /proc/meminfo
MemTotal:      394831136 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

```

```

uname -a:
Linux rhel-8-1-sut 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 144

PowerEdge R640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Platform Notes (Continued)

CVE-2018-3620 (L1 Terminal Fault): Not affected
 Microarchitectural Data Sampling: Not affected
 CVE-2017-5754 (Meltdown): Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 May 14 10:25 last=5

SPEC is set to: /mnt/ramdisk/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	200G	7.5G	193G	4%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id
 BIOS: Dell Inc. 2.5.4 01/13/2020
 Vendor: Dell Inc.
 Product: PowerEdge R640
 Product Family: PowerEdge
 Serial: FPFXCH2

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
 10x 002C069D002C 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933
 4x 00AD00B300AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933
 8x 00AD00B300AD HMA82GR7CJR8N-XN 16 GB 2 rank 3200
 2x 00AD063200AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
 Version 19.0.5.281 Build 20190815
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 144

PowerEdge R640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_peak = 151

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 144

PowerEdge R640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Compiler Version Notes (Continued)

64, Version 19.0.5.281 Build 20190815
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
 Version 19.0.5.281 Build 20190815
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
 507.cactuBSSN_r: -DSPEC_LP64
 508.namd_r: -DSPEC_LP64
 510.parest_r: -DSPEC_LP64
 511.povray_r: -DSPEC_LP64
 519.lbm_r: -DSPEC_LP64
 521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
 526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
 527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
 538.imagick_r: -DSPEC_LP64
 544.nab_r: -DSPEC_LP64
 549.fotonik3d_r: -DSPEC_LP64
 554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 144

PowerEdge R640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using both C and C++:

```
icpc icc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 144

PowerEdge R640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: -m64 -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

510.parest_r: -m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves_r: -m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs

549.fotonik3d_r: basepeak = yes

554.roms_r: -m64 -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 144

PowerEdge R640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-14 23:50:52-0400.

Report generated on 2020-06-09 16:09:55 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-09.