



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

CPU2017 License: 9066


Test Date: Sep-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

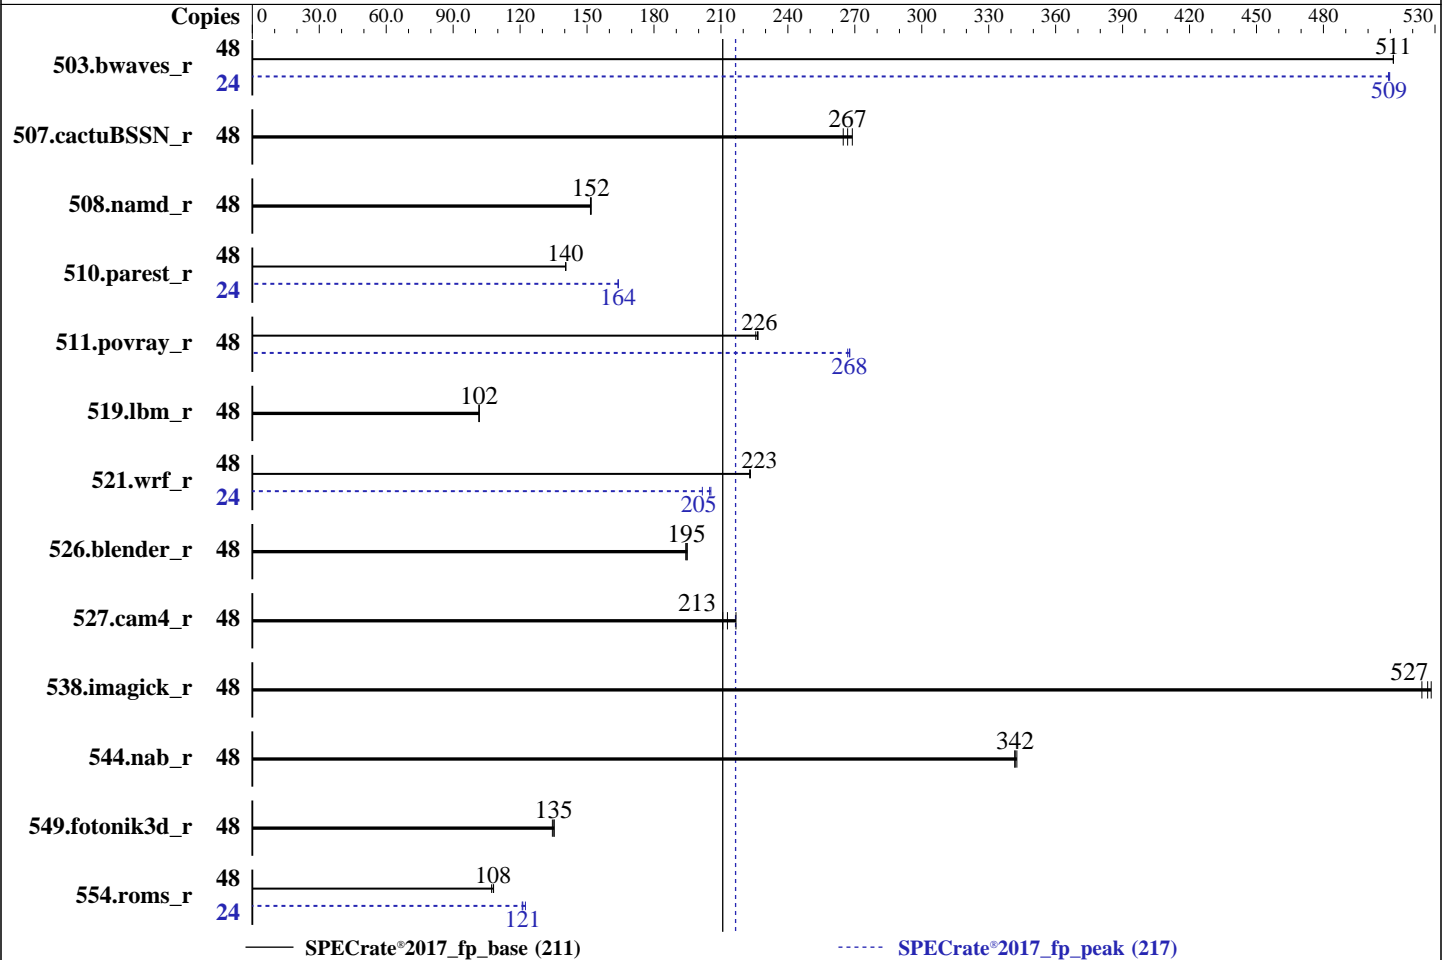

### Hardware

CPU Name: Intel Xeon Gold 6256  
 Max MHz: 4500  
 Nominal: 3600  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 33 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933V-R)  
 Storage: 2 x 600 GB SAS HDD,10k RPM,RAID 1  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler Build 20200306 for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler Build 20200306 for Linux  
 Parallel: No  
 Firmware: Version 2.00.33 released Aug-2019 BIOS  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2019

Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	941	511	941	511	<b>941</b>	<b>511</b>	24	<b>472</b>	<b>509</b>	472	510	473	509
507.cactuBSSN_r	48	229	265	<b>228</b>	<b>267</b>	226	269	48	229	265	<b>228</b>	<b>267</b>	226	269
508.namd_r	48	<b>301</b>	<b>152</b>	300	152	301	152	48	<b>301</b>	<b>152</b>	300	152	301	152
510.parest_r	48	894	141	895	140	<b>894</b>	<b>140</b>	24	<b>383</b>	<b>164</b>	383	164	383	164
511.povray_r	48	<b>495</b>	<b>226</b>	497	226	495	227	48	<b>419</b>	<b>268</b>	420	267	419	268
519.lbm_r	48	<b>498</b>	<b>102</b>	498	102	498	102	48	<b>498</b>	<b>102</b>	498	102	498	102
521.wrf_r	48	482	223	<b>482</b>	<b>223</b>	482	223	24	<b>262</b>	<b>205</b>	262	205	267	202
526.blender_r	48	375	195	<b>376</b>	<b>195</b>	376	194	48	375	195	<b>376</b>	<b>195</b>	376	194
527.cam4_r	48	387	217	<b>394</b>	<b>213</b>	398	211	48	387	217	<b>394</b>	<b>213</b>	398	211
538.imagick_r	48	<b>227</b>	<b>527</b>	226	528	228	524	48	<b>227</b>	<b>527</b>	226	528	228	524
544.nab_r	48	236	343	236	342	<b>236</b>	<b>342</b>	48	236	343	236	342	<b>236</b>	<b>342</b>
549.fotonik3d_r	48	<b>1384</b>	<b>135</b>	1383	135	1391	134	48	<b>1384</b>	<b>135</b>	1383	135	1391	134
554.roms_r	48	<b>706</b>	<b>108</b>	705	108	711	107	24	<b>315</b>	<b>121</b>	315	121	312	122

SPECrate®2017\_fp\_base = **211**

SPECrate®2017\_fp\_peak = **217**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux. The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

**CPU2017 License:** 9066

**Test Sponsor:** New H3C Technologies Co., Ltd.

**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Sep-2020

**Hardware Availability:** Mar-2019

**Software Availability:** Apr-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

- Set SNC to Enabled
- Set XPT Prefetch to Enabled
- Set IMC Interleaving to 1-way Interleave
- Set Patrol Scrub to Disabled

Sysinfo program /home/speccpu/bin/sysinfo  
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
 running on localhost.localdomain Thu Sep 10 05:28:57 2020

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings : 24
physical 0: cores 0 1 3 8 9 12 18 21 25 27 28 29
physical 1: cores 0 1 5 9 10 11 13 16 20 21 25 29
```

From lscpu:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2019

Software Availability: Apr-2020

## Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:   0-47
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz
Stepping:              7
CPU MHz:               1200.042
CPU max MHz:           4500.0000
CPU min MHz:           1200.0000
BogoMIPS:              7200.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              33792K
NUMA node0 CPU(s):    0,1,3,4,6,8,24,25,27,28,30,32
NUMA node1 CPU(s):    2,5,7,9-11,26,29,31,33-35
NUMA node2 CPU(s):    12,13,15,16,19,22,36,37,39,40,43,46
NUMA node3 CPU(s):    14,17,18,20,21,23,38,41,42,44,45,47
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 33792 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 3 4 6 8 24 25 27 28 30 32

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2019

Software Availability: Apr-2020

## Platform Notes (Continued)

```

node 0 size: 95077 MB
node 0 free: 79061 MB
node 1 cpus: 2 5 7 9 10 11 26 29 31 33 34 35
node 1 size: 96765 MB
node 1 free: 90459 MB
node 2 cpus: 12 13 15 16 19 22 36 37 39 40 43 46
node 2 size: 96737 MB
node 2 free: 91560 MB
node 3 cpus: 14 17 18 20 21 23 38 41 42 44 45 47
node 3 size: 96764 MB
node 3 free: 91589 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

```

From /proc/meminfo

```

MemTotal:      394593252 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"

```

```

redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```

uname -a:

```

Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

itlb_multihit:          KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2019

Software Availability: Apr-2020

## Platform Notes (Continued)

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

tsx\_async\_abort: Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Sep 9 23:15 last=5

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	504G	47G	457G	10%	/home

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 2.00.33 08/22/2019

Vendor: H3C

Product: RS33M2C9S

Product Family: Rack

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x NO DIMM NO DIMM

1x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

11x Samsung M393A4K40DB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
=====

```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```

=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

```

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2019

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

-----  
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

-----  
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2019

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2019

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====  
Fortran, C | 521.wrf\_r(peak)

-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2019

Software Availability: Apr-2020

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

### C++ benchmarks:

```

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

### Fortran benchmarks:

```

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

### Benchmarks using both Fortran and C:

```

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

**CPU2017 License:** 9066

**Test Sponsor:** New H3C Technologies Co., Ltd.

**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Sep-2020

**Hardware Availability:** Mar-2019

**Software Availability:** Apr-2020

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-align array32byte -auto -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using both C and C++:

```
icpc icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

**CPU2017 License:** 9066

**Test Sponsor:** New H3C Technologies Co., Ltd.

**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Sep-2020

**Hardware Availability:** Mar-2019

**Software Availability:** Apr-2020

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -m64 -qnextgen

-Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib

-ljemalloc

Fortran benchmarks:

503.bwaves\_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-multiple-gather-scatter-by-shuffles

-qopt-mem-layout-trans=4 -nostandard-realloc-lhs

-align array32byte -auto -mbranches-within-32B-boundaries

-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

521.wrf\_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3

-ipo -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-multiple-gather-scatter-by-shuffles

-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries

-nostandard-realloc-lhs -align array32byte -auto

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 211

H3C UniServer R4900 G3 (Intel Xeon Gold 6256)

SPECrate®2017\_fp\_peak = 217

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2019

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

521.wrf\_r (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.4-CLX-RevB.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.html)

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.4-CLX-RevB.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-09-09 17:28:56-0400.

Report generated on 2020-09-29 15:24:18 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-29.