



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081


Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

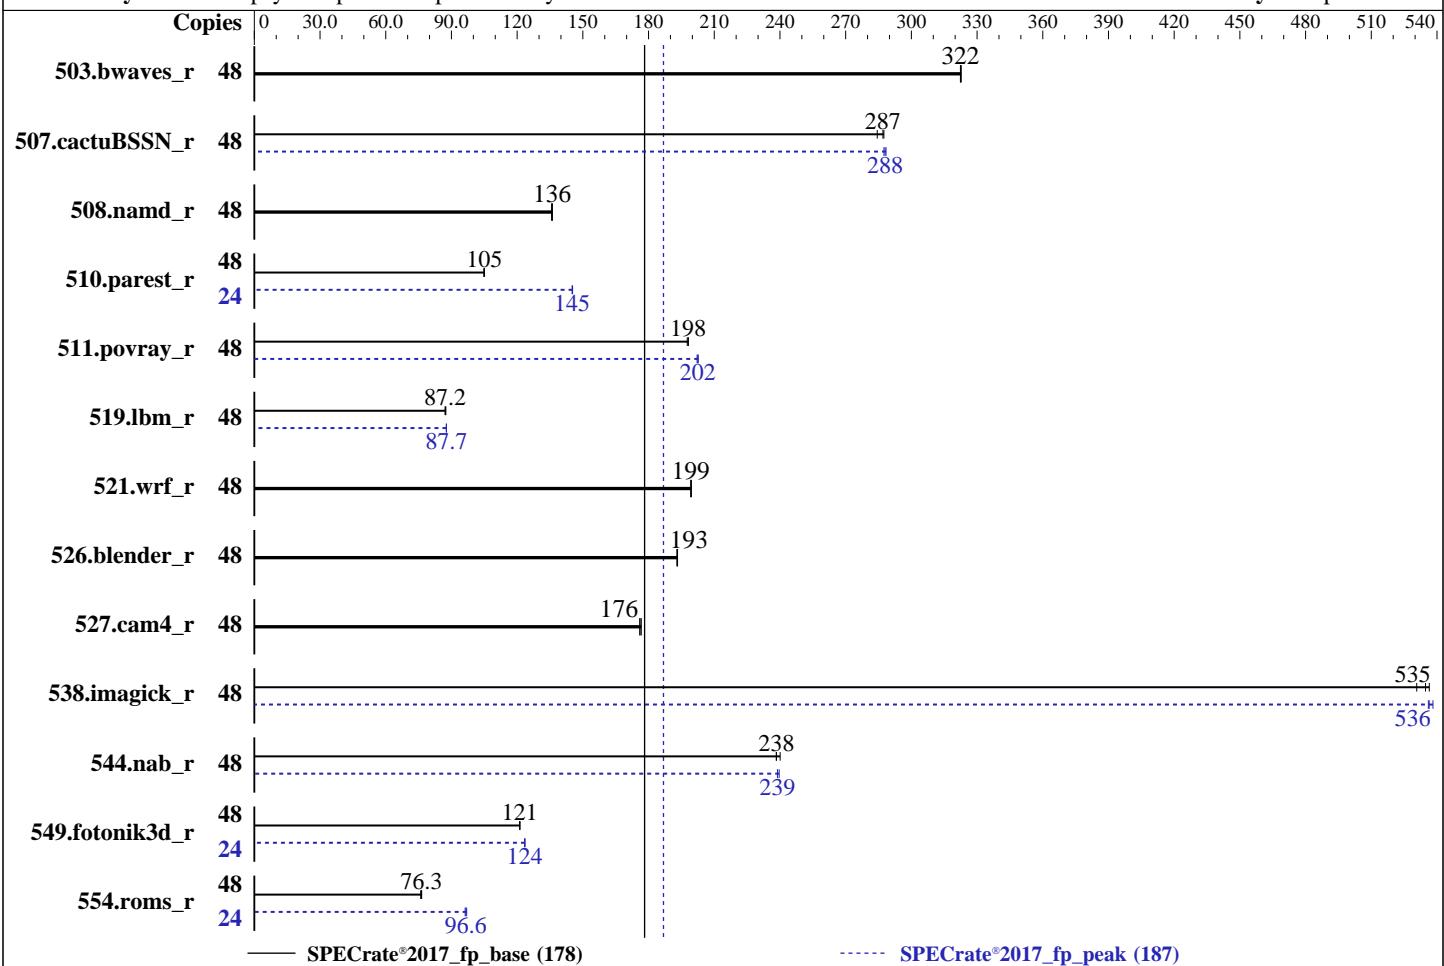

Hardware		Software	
CPU Name:	AMD EPYC 7272	OS:	CentOS Linux 8.2
Max MHz:	3200		kernel version
Nominal:	2900		4.18.0-193.19.1.el8_2.x86_64
Enabled:	24 cores, 2 chips, 2 threads/core	Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Orderable:	1,2 chips	Parallel:	No
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 3003 released Jul-2020
L2:	512 KB I+D on chip per core	File System:	xfs
L3:	64 MB I+D on chip per chip, 16 MB shared / 3 cores	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200V-L)	Peak Pointers:	64-bit
Storage:	1 x 960 GB SSD SATA III	Other:	jemalloc: jemalloc memory allocator library v5.2.0
Other:	None	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1491	323	1493	322	1493	322	48	1491	323	1493	322	1493	322
507.cactuBSSN_r	48	212	287	211	287	214	284	48	211	288	211	288	211	287
508.namd_r	48	335	136	336	136	335	136	48	335	136	336	136	335	136
510.parest_r	48	1199	105	1195	105	1195	105	24	432	145	433	145	432	145
511.povray_r	48	566	198	566	198	567	198	48	554	202	554	202	553	203
519.lbm_r	48	580	87.2	580	87.2	579	87.5	48	577	87.7	577	87.7	577	87.7
521.wrf_r	48	539	200	539	199	539	199	48	539	200	539	199	539	199
526.blender_r	48	378	193	379	193	378	193	48	378	193	379	193	378	193
527.cam4_r	48	477	176	475	177	477	176	48	477	176	475	177	477	176
538.imagick_r	48	225	531	223	536	223	535	48	222	538	223	536	223	536
544.nab_r	48	339	238	336	240	339	238	48	338	239	337	240	338	239
549.fotonik3d_r	48	1543	121	1543	121	1543	121	24	758	123	757	124	757	124
554.roms_r	48	999	76.3	998	76.4	1004	75.9	24	393	97.0	396	96.3	395	96.6

SPECrate®2017_fp_base = 178

SPECrate®2017_fp_peak = 187

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/CPU2017-1.1.0/amd_rate_aocc200_rome_C_lib/64;/home/CPU2017-1.1.0/
     amd_rate_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fno-jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS settings:

Power phase shedding = Disabled

SVM Mode = Disabled

SR-IOV support = Disabled

DRAM Scrub time = Disabled

NUMA nodes per socket = NPS4

Determinism Slider = Power

```
Sysinfo program /home/CPU2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edbe6e46a485a0011
running on Zyxel Fri Oct 23 20:10:43 2020
```

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Platform Notes (Continued)

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7272 12-Core Processor
  2 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings : 24
physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14
physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   2
Core(s) per socket:   12
Socket(s):             2
NUMA node(s):          2
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7272 12-Core Processor
Stepping:               0
CPU MHz:                3134.660
CPU max MHz:           2900.0000
CPU min MHz:           1500.0000
BogoMIPS:              5799.64
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:                512K
L3 cache:                16384K
NUMA node0 CPU(s):     0-11,24-35
NUMA node1 CPU(s):     12-23,36-47
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf perf_pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13
cdp_13 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Platform Notes (Continued)

```
bmi2 cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd
arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 24 25 26 27 28 29 30 31 32 33 34 35
node 0 size: 257553 MB
node 0 free: 257029 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 258041 MB
node 1 free: 257326 MB
node distances:
node 0 1
 0: 10 32
 1: 32 10
```

From /proc/meminfo

```
MemTotal:      527968712 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
centos-release: CentOS Linux release 8.2.2004 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.2 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="8 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8 (Core)"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.2.2004 (Core)
system-release: CentOS Linux release 8.2.2004 (Core)
system-release-cpe: cpe:/o:centos:centos:8
```

uname -a:

```
Linux Zyxel 4.18.0-193.19.1.el8_2.x86_64 #1 SMP Mon Sep 14 14:37:00 UTC 2020 x86_64
x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Platform Notes (Continued)

Kernel self-reported vulnerability status:

itlb_multihit:	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling
srbds:	Not affected
tsx_async_abort:	Not affected

run-level 3 Jun 22 11:12

SPEC is set to: /home/CPU2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/cl_zyxel-home	xfs	839G	9.8G	829G	2%	/home

From /sys/devices/virtual/dmi/id

BIOS:	American Megatrends Inc.	3003	07/10/2020
Vendor:	ASUSTeK COMPUTER INC.		
Product:	KNPP-D32-R Series		
Product Family:	Server		
Serial:	System Serial Number		

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron Technology 36ASF4G72PZ-3G2E2	32 kB	2 rank	3200
16x Unknown Unknown			

(End of data from sysinfo program)

Compiler Version Notes

=====

C	519.lbm_r(base, peak) 538.imagick_r(base, peak)
	544.nab_r(base, peak)

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-fno -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-fno-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang

C++ benchmarks:

-std=c++98 -fno -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -fno-function-specialization

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2  
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs  
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs  
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

-fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Peak Optimization Flags (Continued)

C++ benchmarks:

```
508.namd_r: basepeak = yes

510.parest_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -Ofast -march=znver2
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

Fortran benchmarks:

```
503.bwaves_r: basepeak = yes

549.fotonik3d_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

```
554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: basepeak = yes
```

```
527.cam4_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

```
526.blender_r: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000
-O3 -funroll-loops -Mrecursive -Kieee -fno-finite-math-only -lmvec
-lamdlibm -ljemalloc -lflang
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aoxx200-flags-C4.html>
http://www.spec.org/cpu2017/flags/Epsylon_platform_amd_RZ1_rome.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aoxx200-flags-C4.xml>
http://www.spec.org/cpu2017/flags/Epsylon_platform_amd_RZ1_rome.xml



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7272, 2.9 GHz)
AMD EPYC 7272

SPECrate®2017_fp_base = 178
SPECrate®2017_fp_peak = 187

CPU2017 License: 9081

Test Date: Oct-2020

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Aug-2019

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-23 20:10:43-0400.

Report generated on 2020-11-10 15:21:38 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-10.