



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

SPECrate®2017\_int\_base = 806

SPECrate®2017\_int\_peak = 839

CPU2017 License: 9017


Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

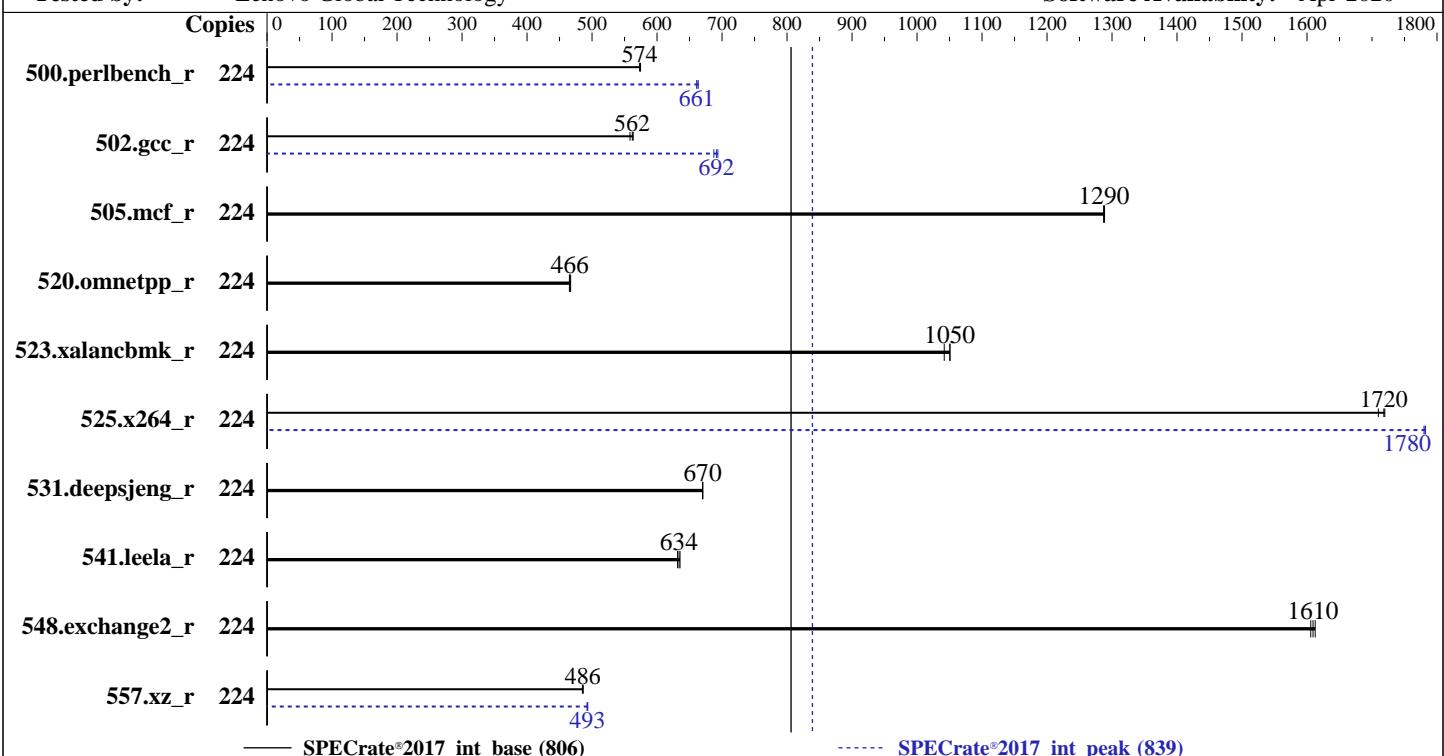

### Hardware

CPU Name: Intel Xeon Platinum 8380H  
Max MHz: 4300  
Nominal: 2900  
Enabled: 112 cores, 4 chips, 2 threads/core  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 38.5 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### OS:

Red Hat Enterprise Linux release 8.2 (Ootpa)

Compiler: Kernel 4.18.0-193.el8.x86\_64

C/C++: Version 19.1.1.217 of Intel

C/C++

Compiler for Linux;

Fortran: Version 19.1.1.217 of Intel Fortran

Compiler for Linux

No

Firmware: Lenovo BIOS Version M5E107D 1.00 released Sep-2020

xfs

File System: Run level 3 (multi-user)

System State: 64-bit

Base Pointers: 32/64-bit

Peak Pointers: jemalloc memory allocator V5.0.1

Other: BIOS set to prefer performance at the cost of additional power usage

### Parallel:

Power Management: BIOS set to prefer performance at the cost of additional power usage

### Software



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

**SPECrate®2017\_int\_base = 806**

**SPECrate®2017\_int\_peak = 839**

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	622	573	621	575	<b>622</b>	<b>574</b>	224	539	661	537	664	<b>539</b>	<b>661</b>		
502.gcc_r	224	563	563	<b>564</b>	<b>562</b>	568	558	224	461	687	457	694	<b>459</b>	<b>692</b>		
505.mcf_r	224	281	1290	281	1290	<b>281</b>	<b>1290</b>	224	281	1290	281	1290	<b>281</b>	<b>1290</b>		
520.omnetpp_r	224	<b>631</b>	<b>466</b>	629	467	632	465	224	<b>631</b>	<b>466</b>	629	467	632	465		
523.xalancbmk_r	224	225	1050	227	1040	<b>225</b>	<b>1050</b>	224	225	1050	227	1040	<b>225</b>	<b>1050</b>		
525.x264_r	224	228	1720	<b>228</b>	<b>1720</b>	229	1710	224	220	1780	<b>220</b>	<b>1780</b>	220	1780		
531.deepsjeng_r	224	383	670	<b>383</b>	<b>670</b>	383	670	224	383	670	<b>383</b>	<b>670</b>	383	670		
541.leela_r	224	584	635	587	632	<b>585</b>	<b>634</b>	224	584	635	587	632	<b>585</b>	<b>634</b>		
548.exchange2_r	224	364	1610	<b>365</b>	<b>1610</b>	365	1610	224	364	1610	<b>365</b>	<b>1610</b>	365	1610		
557.xz_r	224	<b>498</b>	<b>486</b>	499	485	497	486	224	491	492	<b>491</b>	<b>493</b>	490	493		

**SPECrate®2017\_int\_base = 806**

**SPECrate®2017\_int\_peak = 839**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.  
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor.  
For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.0-ic19.1.1/lib/intel64:/home/cpu2017-1.1.0-ic19.1.1/lib/ia32:/home/cpu2017-1.1.0-ic19.1.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

SPECrate®2017\_int\_base = 806

SPECrate®2017\_int\_peak = 839

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

### General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

MONITOR/MWAIT set to Enabled

DCU Streamer Prefetcher set to Disabled

SNC set to Enabled

LLC dead line alloc set to Disable

```
Sysinfo program /home/cpu2017-1.1.0-ic19.1.1/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on localhost.localdomain Sat Oct 24 20:21:41 2020
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8380H CPU @ 2.90GHz
        4 "physical id"s (chips)
        224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
        cpu cores : 28
        siblings   : 56
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                    28 29 30
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

SPECrate®2017\_int\_base = 806

SPECrate®2017\_int\_peak = 839

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

## Platform Notes (Continued)

```
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                224
On-line CPU(s) list:  0-223
Thread(s) per core:   2
Core(s) per socket:   28
Socket(s):             4
NUMA node(s):          8
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8380H CPU @ 2.90GHz
Stepping:               11
CPU MHz:               3800.006
CPU max MHz:           4300.0000
CPU min MHz:           1000.0000
BogoMIPS:              5800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              39424K
NUMA node0 CPU(s):    0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
NUMA node1 CPU(s):    4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
NUMA node2 CPU(s):    28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
NUMA node3 CPU(s):    32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
NUMA node4 CPU(s):    56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
NUMA node5 CPU(s):    60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
NUMA node6 CPU(s):    84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
NUMA node7 CPU(s):    88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpfperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

SPECrate®2017\_int\_base = 806

SPECrate®2017\_int\_peak = 839

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

### Platform Notes (Continued)

```
xsavemopt xsavemc xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld
arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
129 133 134 135
node 0 size: 193119 MB
node 0 free: 192944 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
132 136 137 138 139
node 1 size: 193502 MB
node 1 free: 193366 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
155 156 157 161 162 163
node 2 size: 193529 MB
node 2 free: 193358 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
159 160 164 165 166 167
node 3 size: 193529 MB
node 3 free: 193380 MB
node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
183 184 185 189 190 191
node 4 size: 193529 MB
node 4 free: 193123 MB
node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
187 188 192 193 194 195
node 5 size: 193529 MB
node 5 free: 193131 MB
node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
210 211 212 213 217 218 219
node 6 size: 193529 MB
node 6 free: 193360 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
209 214 215 216 220 221 222 223
node 7 size: 193527 MB
node 7 free: 193381 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 11 20 20 20 20 20 20
 1: 11 10 20 20 20 20 20 20
 2: 20 20 10 11 20 20 20 20
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

SPECrate®2017\_int\_base = 806

SPECrate®2017\_int\_peak = 839

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

### Platform Notes (Continued)

```
3: 20 20 11 10 20 20 20 20
4: 20 20 20 20 10 11 20 20
5: 20 20 20 20 11 10 20 20
6: 20 20 20 20 20 20 10 11
7: 20 20 20 20 20 20 11 10
```

From /proc/meminfo

```
MemTotal: 1584944316 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

itlb_multihit:	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
tsx_async_abort:	Not affected

run-level 3 Oct 24 20:19

SPEC is set to: /home/cpu2017-1.1.0-ic19.1.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
------------	------	------	------	-------	------	------------

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

SPECrate®2017\_int\_base = 806

SPECrate®2017\_int\_peak = 839

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

## Platform Notes (Continued)

```
/dev/sda4      xfs   839G   41G   798G   5% /home
```

```
From /sys/devices/virtual/dmi/id
  BIOS:    Lenovo M5E107D-1.00 09/16/2020
  Vendor:  Lenovo
  Product: ThinkSystem SR860 V2
  Product Family: ThinkSystem
  Serial:  none
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
 48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
```

```
Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base)
-----
```

```
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C      | 500.perlbench_r(peak) 557.xz_r(peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

SPECrate®2017\_int\_base = 806

SPECrate®2017\_int\_peak = 839

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

C | 502.gcc\_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

SPECrate®2017\_int\_base = 806

SPECrate®2017\_int\_peak = 839

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
```

```
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

```
=====
Fortran | 548.exchange2_r(base, peak)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
```

```
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

SPECrate®2017\_int\_base = 806

SPECrate®2017\_int\_peak = 839

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2020

Hardware Availability: Nov-2020

Software Availability: Apr-2020

## Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -festo -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -festo -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

SPECrate®2017\_int\_base = 806

SPECrate®2017\_int\_peak = 839

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

## Peak Portability Flags (Continued)

525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

502.gcc\_r: -m32  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/ia32\_lin  
-std=gnu89  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math  
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

557.xz\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(2.90 GHz, Intel Xeon Platinum 8380H)

SPECrate®2017\_int\_base = 806

SPECrate®2017\_int\_peak = 839

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-A.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-A.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-24 20:21:41-0400.

Report generated on 2020-11-10 15:22:16 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-10.