



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813

SPECrate®2017_int_peak = 866

CPU2017 License: 9082


Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

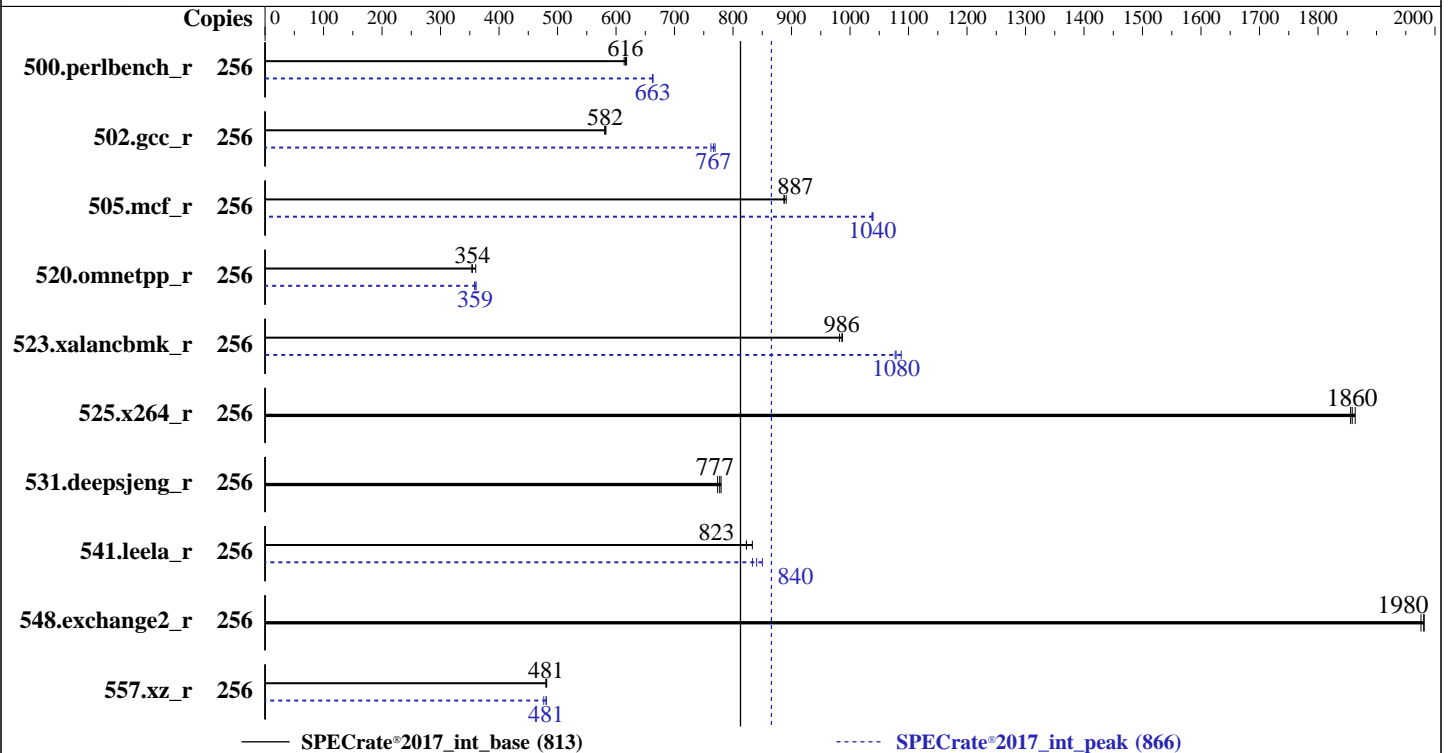

Hardware

CPU Name: AMD EPYC 7763
 Max MHz: 3500
 Nominal: 2450
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 4DRx16 PC4-3200AA-L)
 Storage: 1 x 1.92 TB SATA SSD
 Other: None

Software

OS: Ubuntu 20.04.1 LTS (x86_64) Kernel 5.4.0-65-generic
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: No
 Firmware: Version M02 released Feb-2021
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0;
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813
SPECrate®2017_int_peak = 866

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|------------|-------------|------------|-------------|------------|------------|--------|------------|-------------|------------|-------------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 256 | 664 | 614 | 659 | 618 | 661 | 616 | 256 | 615 | 663 | 615 | 662 | 615 | 663 |
| 502.gcc_r | 256 | 624 | 581 | 622 | 583 | 623 | 582 | 256 | 476 | 762 | 473 | 767 | 471 | 769 |
| 505.mcf_r | 256 | 464 | 891 | 466 | 887 | 466 | 887 | 256 | 398 | 1040 | 398 | 1040 | 399 | 1040 |
| 520.omnetpp_r | 256 | 948 | 354 | 932 | 360 | 950 | 354 | 256 | 937 | 358 | 936 | 359 | 931 | 361 |
| 523.xalancbmk_r | 256 | 275 | 982 | 274 | 987 | 274 | 986 | 256 | 251 | 1080 | 251 | 1080 | 249 | 1090 |
| 525.x264_r | 256 | 241 | 1860 | 241 | 1860 | 242 | 1860 | 256 | 241 | 1860 | 241 | 1860 | 242 | 1860 |
| 531.deepsjeng_r | 256 | 377 | 777 | 376 | 780 | 379 | 774 | 256 | 377 | 777 | 376 | 780 | 379 | 774 |
| 541.leela_r | 256 | 515 | 823 | 515 | 823 | 509 | 833 | 256 | 504 | 840 | 499 | 850 | 509 | 833 |
| 548.exchange2_r | 256 | 339 | 1980 | 339 | 1980 | 338 | 1980 | 256 | 339 | 1980 | 339 | 1980 | 338 | 1980 |
| 557.xz_r | 256 | 575 | 481 | 574 | 482 | 576 | 480 | 256 | 575 | 481 | 575 | 481 | 580 | 476 |

SPECrate®2017_int_base = 813

SPECrate®2017_int_peak = 866

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu
ASLR is disabled to reduce run-to-run issues.

dirty_ratio, swappiness, zone_reclaim_mode, drop_caches and ASLR were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813

SPECrate®2017_int_peak = 866

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/cpu2017/amd_rate_aocc300_milan_A_lib/64;/cpu2017/amd_rate_aocc300_mila  
n_A_lib/32:"  
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

The AMD64 AOCC Compiler Suite is available at

<http://developer.amd.com/amd-aocc/>

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:

cTDP = 280

Determinism Slider set to Power

SMT set to auto

IOMMU set to enable

Package Power Limit set to 280

NUMA nodes per socket set to NPS4

4-link xGMI max speed: 18Gbps

Sysinfo program /cpu2017/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on test Mon Feb 1 10:35:26 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813
SPECrate®2017_int_peak = 866

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Platform Notes (Continued)

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7763 64-Core Processor
 2 "physical id"s (chips)
256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings  : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                256
On-line CPU(s) list:   0-255
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):             2
NUMA node(s):         8
Vendor ID:             AuthenticAMD
CPU family:            25
Model:                 1
Model name:            AMD EPYC 7763 64-Core Processor
Stepping:              1
Frequency boost:       enabled
CPU MHz:               2110.393
CPU max MHz:           2450.0000
CPU min MHz:           1500.0000
BogoMIPS:              4900.22
Virtualization:        AMD-V
L1d cache:             4 MiB
L1i cache:             4 MiB
L2 cache:              64 MiB
L3 cache:              512 MiB
NUMA node0 CPU(s):    0-15,128-143
NUMA node1 CPU(s):    16-31,144-159
NUMA node2 CPU(s):    32-47,160-175
NUMA node3 CPU(s):    48-63,176-191
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813

SPECrate®2017_int_peak = 866

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Platform Notes (Continued)

```

NUMA node4 CPU(s):          64-79,192-207
NUMA node5 CPU(s):          80-95,208-223
NUMA node6 CPU(s):          96-111,224-239
NUMA node7 CPU(s):          112-127,240-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143
node 0 size: 128880 MB
node 0 free: 128381 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159
node 1 size: 129015 MB
node 1 free: 128364 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175
node 2 size: 129015 MB
node 2 free: 128623 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813
SPECrate®2017_int_peak = 866

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Platform Notes (Continued)

```

node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 176 177 178 179 180 181
182 183 184 185 186 187 188 189 190 191
node 3 size: 129003 MB
node 3 free: 128477 MB
node 4 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 192 193 194 195 196 197
198 199 200 201 202 203 204 205 206 207
node 4 size: 128991 MB
node 4 free: 128649 MB
node 5 cpus: 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 208 209 210 211 212 213
214 215 216 217 218 219 220 221 222 223
node 5 size: 129015 MB
node 5 free: 128649 MB
node 6 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 224 225 226
227 228 229 230 231 232 233 234 235 236 237 238 239
node 6 size: 129015 MB
node 6 free: 128674 MB
node 7 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 240 241
242 243 244 245 246 247 248 249 250 251 252 253 254 255
node 7 size: 129013 MB
node 7 free: 128696 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  12  12  12  32  32  32  32
  1:  12  10  12  12  32  32  32  32
  2:  12  12  10  12  32  32  32  32
  3:  12  12  12  10  32  32  32  32
  4:  32  32  32  32  10  12  12  12
  5:  32  32  32  32  12  10  12  12
  6:  32  32  32  32  12  12  10  12
  7:  32  32  32  32  12  12  12  10

```

From /proc/meminfo

MemTotal: 1056719796 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

/usr/bin/lsb_release -d

Ubuntu 20.04.1 LTS

From /etc/*release* /etc/*version*

debian_version: bullseye/sid

os-release:

NAME="Ubuntu"

VERSION="20.04.1 LTS (Focal Fossa)"

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813
SPECrate®2017_int_peak = 866

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 20.04.1 LTS"
VERSION_ID="20.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux test 5.4.0-65-generic #73-Ubuntu SMP Mon Jan 18 17:25:17 UTC 2021 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

| | |
|--|---|
| CVE-2018-12207 (iTLB Multihit): | Not affected |
| CVE-2018-3620 (L1 Terminal Fault): | Not affected |
| Microarchitectural Data Sampling: | Not affected |
| CVE-2017-5754 (Meltdown): | Not affected |
| CVE-2018-3639 (Speculative Store Bypass): | Mitigation: Speculative Store Bypass disabled via prctl and seccomp |
| CVE-2017-5753 (Spectre variant 1): | Mitigation: usercopy/swapgs barriers and __user pointer sanitization |
| CVE-2017-5715 (Spectre variant 2): | Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling |
| CVE-2020-0543 (Special Register Buffer Data Sampling): | Not affected |
| CVE-2019-11135 (TSX Asynchronous Abort): | Not affected |

```
run-level 5 Feb 1 10:27
```

```
SPEC is set to: /cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 1.8T 17G 1.7T 1% /
```

```
From /sys/devices/virtual/dmi/id
Vendor: GIGABYTE
Product: R282-Z90-00
Product Family: Server
Serial: 1234567890abcdefghijkl
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
16x Samsung M386A8K40DM2-CWE 64 GB 4 rank 3200
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813
SPECrate®2017_int_peak = 866

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Platform Notes (Continued)

16x Unknown Unknown

BIOS:

BIOS Vendor: GIGABYTE
BIOS Version: M02
BIOS Date: 02/01/2021
BIOS Revision: 5.21

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C | 502.gcc_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813
SPECrate®2017_int_peak = 866

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813
SPECrate®2017_int_peak = 866

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813

SPECrate®2017_int_peak = 866

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813

SPECrate®2017_int_peak = 866

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813

SPECrate®2017_int_peak = 866

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

502.gcc_r (continued):

```
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

505.mcf_r: -m64 -Wl,-allow-multiple-definition

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264_r: basepeak = yes

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -m64 -std=c++98

```
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc
```

523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate®2017_int_base = 813
SPECrate®2017_int_peak = 866

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

531.deepsjeng_r: basepeak = yes

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument

```
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument

```
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.2-Milan.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.2-Milan.xml>



SPEC CPU[®]2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 7763 , 2.45GHz)

SPECrate[®]2017_int_base = 813

SPECrate[®]2017_int_peak = 866

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2017 v1.1.5 on 2021-02-01 05:35:25-0500.

Report generated on 2021-03-17 11:02:01 by CPU2017 PDF formatter v6255.

Originally published on 2021-03-16.