



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)


CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

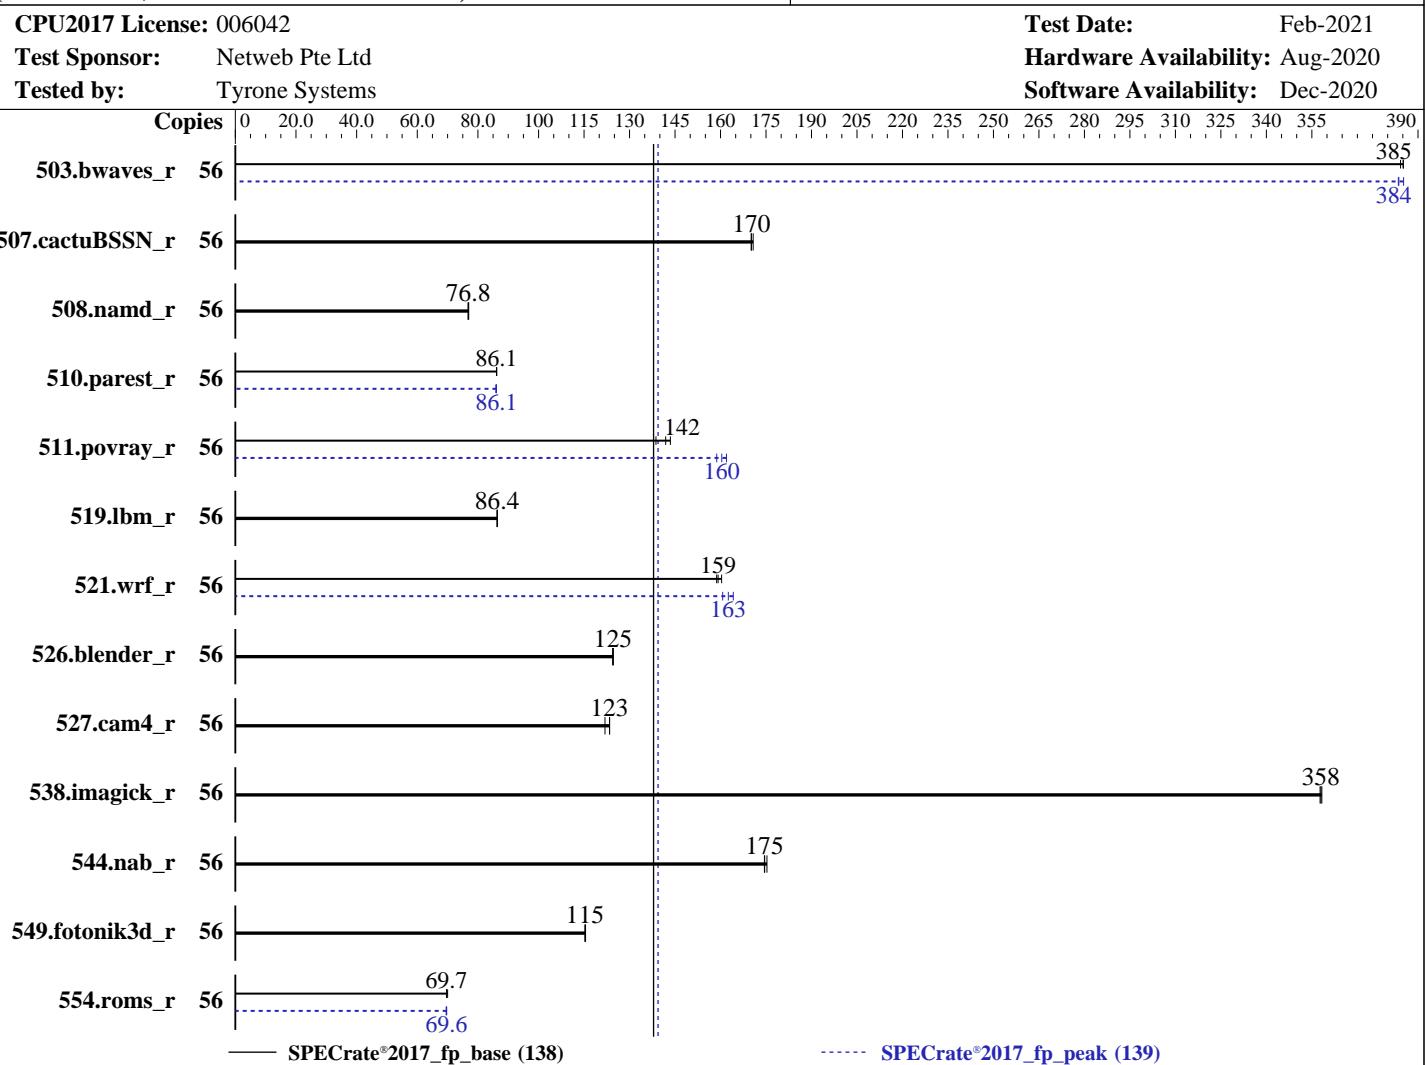

Hardware

CPU Name: Intel Xeon Gold 5117
Max MHz: 2800
Nominal: 2000
Enabled: 28 cores, 2 chips, 2 threads/core
Orderable: 1,2 (chip)s
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 19.25 MB I+D on chip per chip
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)
Storage: 1 x 480 GB SATA SSD
Other: None

OS:

CentOS Linux release 8.3.2011
Kernel 4.18.0-240.el8.x86_64
4.18.0-240.el8.x86_64

Compiler:

C/C++: Version 19.1.1.217 of Intel C/C++
Compiler Build 20200306 for Linux;
Fortran: Version 19.1.1.217 of Intel Fortran
Compiler Build 20200306 for Linux

Parallel:

No
Version 3.4 released Oct-2020

Firmware:

xfs

File System:

Run level 3 (multi-user)

System State:

64-bit

Base Pointers:

64-bit

Peak Pointers:

64-bit
jemalloc memory allocator V5.0.1

Other:

Power Management: BIOS set to prefer performance at the cost of additional power usage.

Software



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	56	1458	385	1458	385	1461	384	56	1464	384	1464	384	1458	385
507.cactuBSSN_r	56	417	170	417	170	415	171	56	417	170	417	170	415	171
508.namd_r	56	691	77.0	693	76.8	693	76.8	56	691	77.0	693	76.8	693	76.8
510.parest_r	56	1701	86.1	1701	86.1	1699	86.2	56	1705	85.9	1702	86.1	1701	86.1
511.povray_r	56	921	142	911	143	943	139	56	824	159	807	162	815	160
519.lbm_r	56	683	86.4	683	86.4	684	86.3	56	683	86.4	683	86.4	684	86.3
521.wrf_r	56	782	160	790	159	788	159	56	781	161	764	164	772	163
526.blender_r	56	685	124	684	125	685	125	56	685	124	684	125	685	125
527.cam4_r	56	804	122	794	123	794	123	56	804	122	794	123	794	123
538.imagick_r	56	389	358	389	358	389	358	56	389	358	389	358	389	358
544.nab_r	56	540	174	540	175	538	175	56	540	174	540	175	538	175
549.fotonik3d_r	56	1892	115	1892	115	1889	115	56	1892	115	1892	115	1889	115
554.roms_r	56	1271	70.0	1277	69.7	1278	69.6	56	1280	69.5	1277	69.7	1278	69.6

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.

The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

General Notes

Binaries compiled on a system with 2x Intel Cascade Lake CPU 4214R + 384 GB RAM memory using Centos 8.2 x86_64

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode = Extreme Performance

SNC = Enable

Stale AtoS = Disable

IMC Interleaving = 1-way Interleave

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on spec Fri Feb 26 03:36:05 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5117 CPU @ 2.00GHz

2 "physical id"s (chips)

56 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

siblings : 28

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

Platform Notes (Continued)

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:  0-55
Thread(s) per core:   2
Core(s) per socket:   14
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 5117 CPU @ 2.00GHz
Stepping:               4
CPU MHz:               1124.882
CPU max MHz:           2800.0000
CPU min MHz:           800.0000
BogoMIPS:              4000.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              19712K
NUMA node0 CPU(s):    0-13,28-41
NUMA node1 CPU(s):    14-27,42-55
Flags:     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
invpcid_single pti intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority
ept vpid ept_ad fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke md_clear flush_l1d
```

/proc/cpuinfo cache data
cache size : 19712 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 28 29 30 31 32 33 34 35 36 37 38 39 40 41

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

Platform Notes (Continued)

```
node 0 size: 183414 MB
node 0 free: 176323 MB
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 183603 MB
node 1 free: 179576 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10

From /proc/meminfo
MemTotal:           394864892 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 8.3.2011
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.3
os-release:
  NAME="CentOS Linux"
  VERSION="8"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.3.2011
system-release: CentOS Linux release 8.3.2011
system-release-cpe: cpe:/o:centos:centos:8

uname -a:
Linux spec 4.18.0-240.el8.x86_64 #1 SMP Fri Sep 25 19:48:47 UTC 2020 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

KVM: Mitigation: Split huge pages

CVE-2018-3620 (L1 Terminal Fault):

Mitigation: PTE Inversion; VMX:

conditional cache flushes, SMT

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Platform Notes (Continued)

Microarchitectural Data Sampling:

vulnerable

Mitigation: Clear CPU buffers; SMT vulnerable

CVE-2017-5754 (Meltdown):

Mitigation: PTI

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Full generic retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Feb 25 17:35

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/cl-home	xfs	372G	198G	174G	54%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Tyrone Systems
Product:	Tyrone Camarero DS400E1
Serial:	S263875X9527668

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x NO DIMM NO DIMM
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2400

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	3.4
BIOS Date:	10/30/2020
BIOS Revision:	5.14

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray_r(base) 526.blender_r(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray_r(base) 526.blender_r(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

Compiler Version Notes (Continued)

=====

Fortran, C | 521.wrf_r(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 521.wrf_r(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-64/lib
-ljemalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -m64 -qnextgen
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast
-ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jet5.0.1-64/lib
-ljemalloc

Fortran benchmarks:

503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactusBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400E1U-224R4
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate®2017_fp_base = 138

SPECrate®2017_fp_peak = 139

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-25 17:06:04-0500.

Report generated on 2021-03-16 15:29:50 by CPU2017 PDF formatter v6255.

Originally published on 2021-03-16.