



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 115

PowerEdge MX740c (Intel Xeon Gold 6208U, 2.90 GHz)

SPECrate®2017_int_peak = 119

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2021

Hardware Availability: Jul-2020

Software Availability: Aug-2020

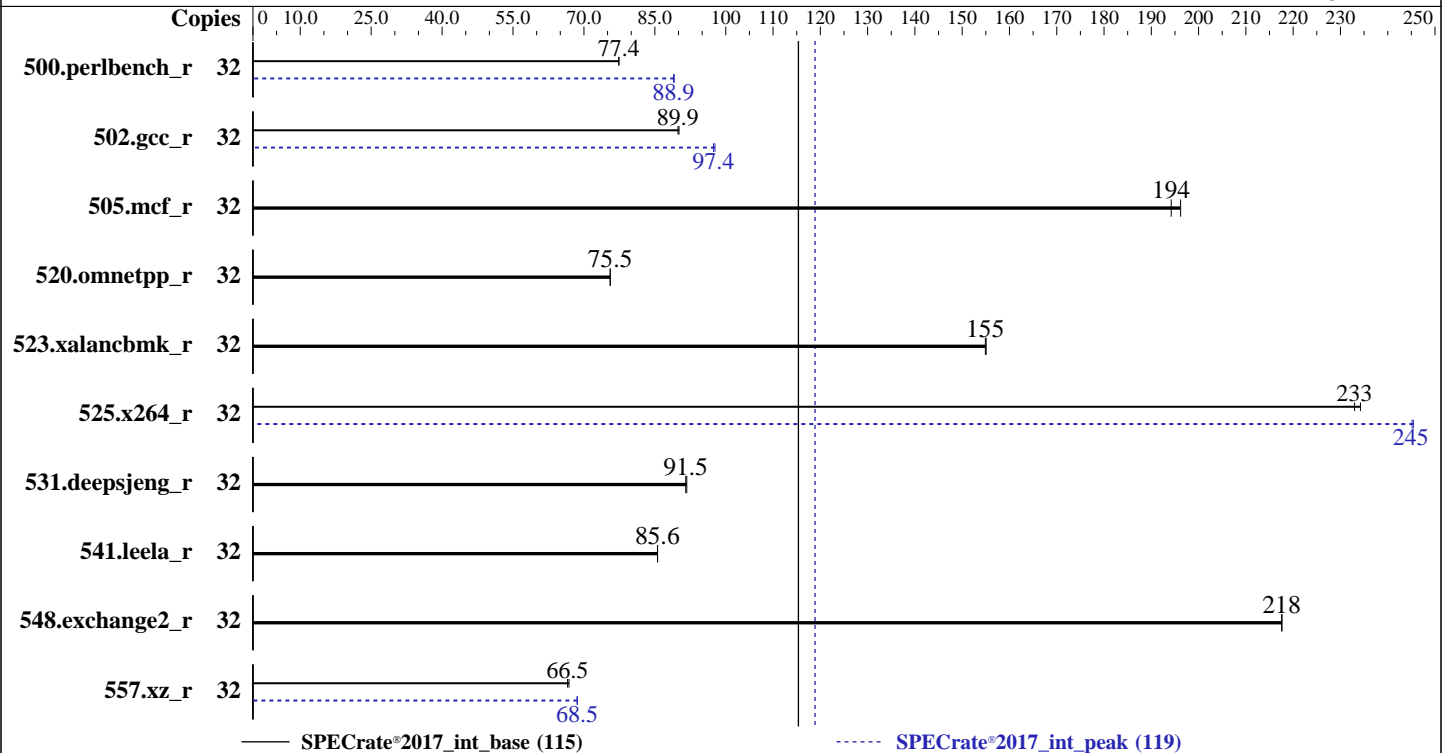

Hardware

CPU Name: Intel Xeon Gold 6208U
 Max MHz: 3900
 Nominal: 2900
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 22 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 8.2 (Ootpa)
 kernel 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 19.1.2.275 of Intel C/C++;
 Fortran: Version 19.1.2.275 of Intel Fortran
 Parallel: No
 Firmware: Version 2.9.1 released Aug-2020
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 115

PowerEdge MX740c (Intel Xeon Gold 6208U, 2.90 GHz)

SPECrate®2017_int_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2021

Hardware Availability: Jul-2020

Software Availability: Aug-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	658	77.4	658	77.4			32	573	88.9	572	89.1		
502.gcc_r	32	503	90.1	504	89.9			32	465	97.4	464	97.7		
505.mcf_r	32	264	196	266	194			32	264	196	266	194		
520.omnetpp_r	32	556	75.5	556	75.6			32	556	75.5	556	75.6		
523.xalancbmk_r	32	218	155	218	155			32	218	155	218	155		
525.x264_r	32	240	233	239	234			32	229	245	228	245		
531.deepsjeng_r	32	400	91.8	401	91.5			32	400	91.8	401	91.5		
541.leela_r	32	619	85.6	619	85.6			32	619	85.6	619	85.6		
548.exchange2_r	32	385	218	385	218			32	385	218	385	218		
557.xz_r	32	519	66.5	517	66.8			32	504	68.6	504	68.5		

SPECrate®2017_int_base = 115

SPECrate®2017_int_peak = 119

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/dev/shm/cpu2017-ic19.lul/lib/intel64:/dev/shm/cpu2017-ic19.lul/lib/ia3
    2:/dev/shm/cpu2017-ic19.lul/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 115

PowerEdge MX740c (Intel Xeon Gold 6208U, 2.90 GHz)

SPECrate®2017_int_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2021

Hardware Availability: Jul-2020

Software Availability: Aug-2020

General Notes (Continued)

is mitigated in the system as tested and documented.
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
`sync; echo 3> /proc/sys/vm/drop_caches`
 runcpu command invoked through numactl i.e.:
`numactl --interleave=all runcpu <etc>`
 Benchmark run from a 225 GB ramdisk created with the cmd: `"mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"`
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:
 Sub NUMA Cluster enabled
 Virtualization Technology disabled
 System Profile set to Custom
 CPU Performance set to Maximum Performance
 C States set to Autonomous
 ClE disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Performance
 Memory Patrol Scrub set to standard
 Logical Processor enabled
 CPU Interconnect Bus Link Power Management disabled
 PCI ASPM L1 Link Power Management disabled
 UPI Prefetch enabled
 LLC Prefetch disabled
 Dead Line LLC Alloc enabled
 Directory AtoS disabled

Sysinfo program `/dev/shm/cpu2017-ic19.lul/bin/sysinfo`
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
 running on localhost.localdomain Sun Feb 21 14:26:49 2021

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From `/proc/cpuinfo`
 model name : Intel(R) Xeon(R) Gold 6208U CPU @ 2.90GHz
 1 "physical id"s (chips)
 32 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from `/proc/cpuinfo` might not be reliable. Use with caution.)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 115

PowerEdge MX740c (Intel Xeon Gold 6208U, 2.90 GHz)

SPECrate®2017_int_peak = 119

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2021
Hardware Availability: Jul-2020
Software Availability: Aug-2020

Platform Notes (Continued)

cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              1
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6208U CPU @ 2.90GHz
Stepping:               7
CPU MHz:                3595.879
CPU max MHz:            3900.0000
CPU min MHz:            1200.0000
BogoMIPS:               5800.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               22528K
NUMA node0 CPU(s):     0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30
NUMA node1 CPU(s):     1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 115

PowerEdge MX740c (Intel Xeon Gold 6208U, 2.90 GHz)

SPECrate®2017_int_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2021

Hardware Availability: Jul-2020

Software Availability: Aug-2020

Platform Notes (Continued)

physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30

node 0 size: 192046 MB

node 0 free: 178866 MB

node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31

node 1 size: 193531 MB

node 1 free: 193257 MB

node distances:

node 0 1

0: 10 11

1: 11 10

From /proc/meminfo

MemTotal: 394832108 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.2 (Ootpa)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="8.2"

PLATFORM_ID="platform:el8"

PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"

ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:

Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020

x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

itlb_multihit:

KVM: Vulnerable

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional,

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 115

PowerEdge MX740c (Intel Xeon Gold 6208U, 2.90 GHz)

SPECrate®2017_int_peak = 119

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2021
Hardware Availability: Jul-2020
Software Availability: Aug-2020

Platform Notes (Continued)

tsx_async_abort: RSB filling
Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Feb 21 13:54

SPEC is set to: /dev/shm/cpu2017-ic19.1ul
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 189G 6.0G 183G 4% /dev/shm

From /sys/devices/virtual/dmi/id
BIOS: Dell Inc. 2.9.1 08/09/2020
Vendor: Dell Inc.
Product: PowerEdge MX740c
Product Family: PowerEdge
Serial: 1234567

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
10x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
1x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
1x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
12x Not Specified Not Specified

(End of data from sysinfo program)
The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 19.1.2.275
Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 115

PowerEdge MX740c (Intel Xeon Gold 6208U, 2.90 GHz)

SPECrate®2017_int_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2021

Hardware Availability: Jul-2020

Software Availability: Aug-2020

Compiler Version Notes (Continued)

19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 19.1.2.275
Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version
19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 19.1.2.275
Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 115

PowerEdge MX740c (Intel Xeon Gold 6208U, 2.90 GHz)

SPECrate®2017_int_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2021

Hardware Availability: Jul-2020

Software Availability: Aug-2020

Compiler Version Notes (Continued)

| 525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version
19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version
19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 115

PowerEdge MX740c (Intel Xeon Gold 6208U, 2.90 GHz)

SPECrate®2017_int_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2021

Hardware Availability: Jul-2020

Software Availability: Aug-2020

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 115

PowerEdge MX740c (Intel Xeon Gold 6208U, 2.90 GHz)

SPECrate®2017_int_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2021

Hardware Availability: Jul-2020

Software Availability: Aug-2020

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/ia32_lin
-std=gnu89
-w1,-plugin-opt=-x86-branches-within-32B-boundaries
-w1,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 115

PowerEdge MX740c (Intel Xeon Gold 6208U, 2.90 GHz)

SPECrate®2017_int_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2021

Hardware Availability: Jul-2020

Software Availability: Aug-2020

Peak Optimization Flags (Continued)

```
525.x264_r: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2021-02-21 14:26:48-0500.

Report generated on 2021-03-16 18:36:16 by CPU2017 PDF formatter v6255.

Originally published on 2021-03-16.