



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

### BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97


Test Date: Apr-2021

Test Sponsor: Altos Computing Inc.

Hardware Availability: Feb-2020

Tested by: Altos Computing Inc.

Software Availability: Apr-2020

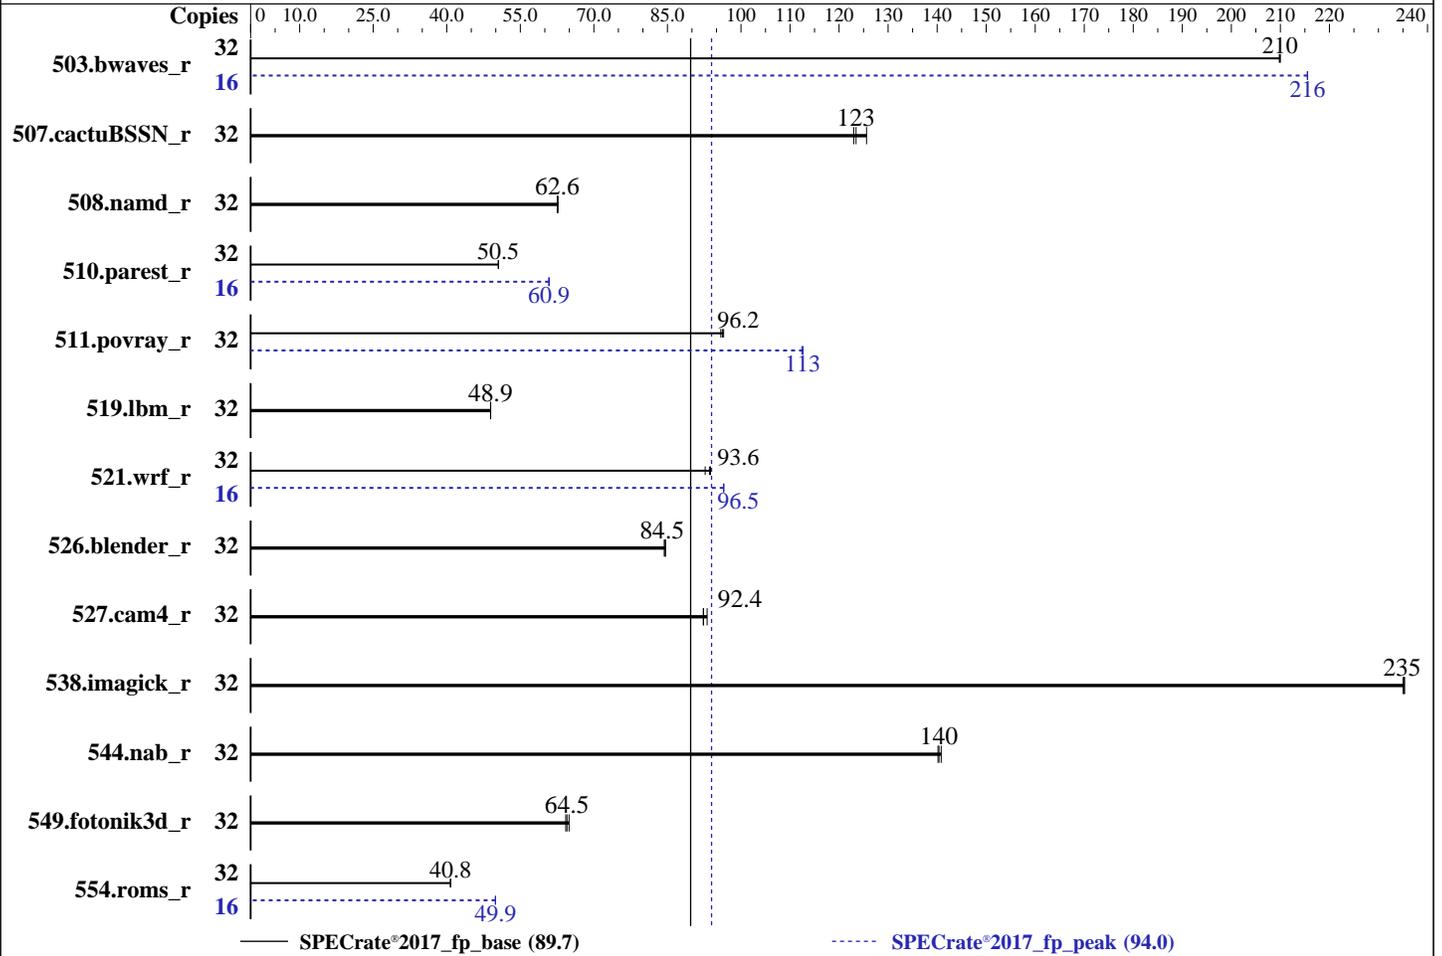

### Hardware

CPU Name: Intel Xeon Silver 4216  
 Max MHz: 3200  
 Nominal: 2100  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (6 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)  
 Storage: 1 x 1.6 TB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.1 (Ootpa) 4.18.0-147.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler Build 20200306 for Linux; Fortran: Version 19.1.1.217 of Intel Fortran Compiler Build 20200306 for Linux  
 Parallel: No  
 Firmware: Version 3.3 released Jul-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

## BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	<b>1529</b>	<b>210</b>	1528	210	1530	210	16	<b>744</b>	<b>216</b>	744	216	745	215
507.cactuBSSN_r	32	<b>328</b>	<b>123</b>	329	123	323	126	32	<b>328</b>	<b>123</b>	329	123	323	126
508.namd_r	32	486	62.5	485	62.7	<b>486</b>	<b>62.6</b>	32	486	62.5	485	62.7	<b>486</b>	<b>62.6</b>
510.parest_r	32	1657	50.5	<b>1657</b>	<b>50.5</b>	1656	50.6	16	<b>688</b>	<b>60.9</b>	688	60.9	688	60.8
511.povray_r	32	779	95.9	775	96.5	<b>777</b>	<b>96.2</b>	32	663	113	<b>664</b>	<b>113</b>	665	112
519.lbm_r	32	689	48.9	<b>689</b>	<b>48.9</b>	689	49.0	32	689	48.9	<b>689</b>	<b>48.9</b>	689	49.0
521.wrf_r	32	764	93.8	773	92.7	<b>766</b>	<b>93.6</b>	16	372	96.5	<b>371</b>	<b>96.5</b>	371	96.5
526.blender_r	32	576	84.6	<b>577</b>	<b>84.5</b>	578	84.3	32	576	84.6	<b>577</b>	<b>84.5</b>	578	84.3
527.cam4_r	32	606	92.3	601	93.1	<b>606</b>	<b>92.4</b>	32	606	92.3	601	93.1	<b>606</b>	<b>92.4</b>
538.imagick_r	32	339	235	338	235	<b>338</b>	<b>235</b>	32	339	235	338	235	<b>338</b>	<b>235</b>
544.nab_r	32	384	140	382	141	<b>384</b>	<b>140</b>	32	384	140	382	141	<b>384</b>	<b>140</b>
549.fotonik3d_r	32	1941	64.3	1920	64.9	<b>1933</b>	<b>64.5</b>	32	1941	64.3	1920	64.9	<b>1933</b>	<b>64.5</b>
554.roms_r	32	1247	40.8	<b>1247</b>	<b>40.8</b>	1247	40.8	16	509	50.0	<b>509</b>	<b>49.9</b>	510	49.9

SPECrate®2017\_fp\_base = **89.7**

SPECrate®2017\_fp\_peak = **94.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

### Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOCONF = "retain:true"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

Power Policy Quick Settings set to Best Performance

IMC set to Auto

Sub\_NUMA Cluster set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on rhel81 Sat Apr 24 17:50:51 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4216 CPU @ 2.10GHz

1 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu from util-linux 2.32.1:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 32

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Platform Notes (Continued)

```

On-line CPU(s) list: 0-31
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Silver 4216 CPU @ 2.10GHz
Stepping: 7
CPU MHz: 2614.172
CPU max MHz: 3200.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 22528K
NUMA node0 CPU(s): 0-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31
node 0 size: 191669 MB
node 0 free: 190685 MB
node distances:
node 0
0: 10

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Platform Notes (Continued)

From /proc/meminfo

MemTotal: 196269852 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.1 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.1"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.1:ga

uname -a:

Linux rhel181 4.18.0-147.el8.x86\_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

No status reported

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported

CVE-2019-11135 (TSX Asynchronous Abort):

No status reported

run-level 3 Apr 24 17:46

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.5T	177G	1.3T	13%	/home

From /sys/devices/virtual/dmi/id

```
Vendor:      Altos
Product:    BrainSphere T350 F4
Product Family: Altos Server
Serial:    123456789
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
10x NO DIMM NO DIMM
6x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400
```

BIOS:

```
BIOS Vendor:    American Megatrends Inc.
BIOS Version:   3.3
BIOS Date:      07/31/2020
BIOS Revision:  5.14
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

```
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
=====  
Fortran, C | 521.wrf\_r(peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
Fortran, C | 521.wrf\_r(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Base Portability Flags (Continued)

```

511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

### C++ benchmarks:

```

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

### Fortran benchmarks:

```

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

### Benchmarks using both Fortran and C:

```

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -m64 -qnextgen  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

Fortran benchmarks:

503.bwaves\_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

521.wrf\_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017\_fp\_base = 89.7

BrainSphere T350 F4 (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Apr-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Altos-Platform-Settings-V1.0-revD.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Altos-Platform-Settings-V1.0-revD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-04-24 05:50:50-0400.

Report generated on 2021-05-12 13:41:21 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-11.