



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix


SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

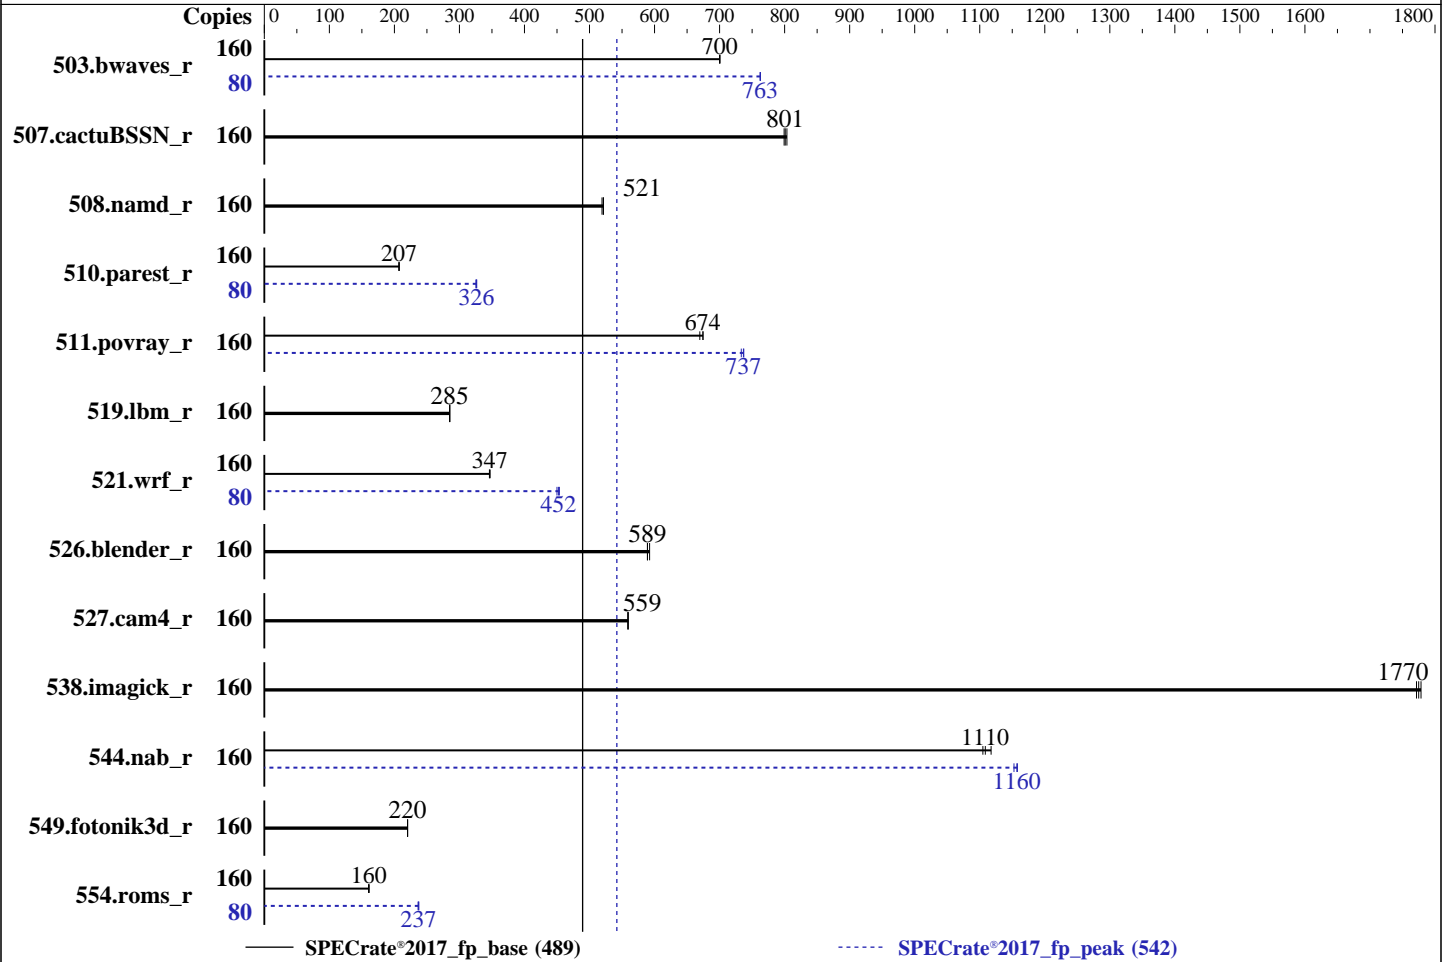

Hardware

CPU Name: Intel Xeon Platinum 8380
Max MHz: 3400
Nominal: 2300
Enabled: 80 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 4 TB (32 x 128 GB 4Rx4 PC4-3200AA-L)
Storage: 1x 2 TB SATA HDD, 7200RPM
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 Kernel 5.3.18-24.61-preempt
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel: No
Firmware: Nettrix BIOS Version 0PYH001029 released Apr-2021
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	<u>2291</u>	<u>700</u>	2290	700	2293	700	80	1052	763	1052	762	<u>1052</u>	<u>763</u>
507.cactuBSSN_r	160	253	799	252	804	<u>253</u>	<u>801</u>	160	253	799	252	804	<u>253</u>	<u>801</u>
508.namd_r	160	292	521	<u>292</u>	<u>521</u>	293	519	160	292	521	<u>292</u>	<u>521</u>	293	519
510.parest_r	160	2019	207	2023	207	<u>2020</u>	<u>207</u>	80	643	325	<u>642</u>	<u>326</u>	641	327
511.povray_r	160	558	670	554	675	<u>554</u>	<u>674</u>	160	<u>507</u>	<u>737</u>	507	737	509	733
519.lbm_r	160	<u>592</u>	<u>285</u>	592	285	591	285	160	<u>592</u>	<u>285</u>	592	285	591	285
521.wrf_r	160	<u>1034</u>	<u>347</u>	1033	347	1036	346	80	398	450	<u>396</u>	<u>452</u>	395	454
526.blender_r	160	<u>414</u>	<u>589</u>	411	592	414	589	160	<u>414</u>	<u>589</u>	411	592	414	589
527.cam4_r	160	<u>500</u>	<u>559</u>	500	559	501	559	160	<u>500</u>	<u>559</u>	500	559	501	559
538.imagick_r	160	225	1770	<u>224</u>	<u>1770</u>	224	1780	160	225	1770	<u>224</u>	<u>1770</u>	224	1780
544.nab_r	160	244	1100	241	1120	<u>243</u>	<u>1110</u>	160	233	1160	234	1150	<u>233</u>	<u>1160</u>
549.fotonik3d_r	160	2829	220	<u>2831</u>	<u>220</u>	2832	220	160	2829	220	<u>2831</u>	<u>220</u>	2832	220
554.roms_r	160	1578	161	1585	160	<u>1585</u>	<u>160</u>	80	538	236	<u>536</u>	<u>237</u>	535	238

SPECrate®2017_fp_base = **489**

SPECrate®2017_fp_peak = **542**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tuning Kernel Parameters:

```

sched_migration_cost_ns=1000
sched_rt_runtime_us=990000
sched_latency_ns=24000000
sched_min_granularity_ns=10000000
dirty_background_ratio=10
dirty_ratio=40
dirty_writeback_centisecs=1500
dirty_expire_centisecs=1800
swappiness=10
numa_balancing=0

```

Set CPU frequency governor as "ondemand" using "cpupower frequency-set -g ondemand"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/admin/benchmarks/SPECcpu2017/lib/intel64:/home/admin/benchmarks/S
PECcpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7940X CPU + 64GB RAM
memory using openSUSE Leap 15.2
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0D000280 for
the Intel Xeon Platinum 8380 processor.

BIOS Configuration:

Application Performance Profile Set to Computing Throughput Mode
SNC set to Enable SNC2(2-clusters)
XPT Prefetch set to Enabled
KTI Prefetch set to Disabled
Stale AtoS set to Enabled
Patrol Scrub set to Disabled
LLC Dead Line Allocation set to Disabled

BMC Settings:

Cooling Policy set to Manual Mode
Fan Duty set to 95

Sysinfo program /home/admin/benchmarks/SPECcpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Fri May 14 18:25:13 2021

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
 2 "physical id"s (chips)
160 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 40
siblings : 80
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
```

```
From lscpu from util-linux 2.33.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 46 bits physical, 57 bits virtual
CPU(s): 160
On-line CPU(s) list: 0-159
Thread(s) per core: 2
Core(s) per socket: 40
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
Stepping: 6
CPU MHz: 900.035
CPU max MHz: 3400.0000
CPU min MHz: 800.0000
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 61440K
NUMA node0 CPU(s): 0-19,80-99
NUMA node1 CPU(s): 20-39,100-119
NUMA node2 CPU(s): 40-59,120-139
NUMA node3 CPU(s): 60-79,140-159
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Platform Notes (Continued)

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_lld arch_capabilities

```
/proc/cpuinfo cache data
cache size : 61440 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 80 81 82 83 84 85 86 87
88 89 90 91 92 93 94 95 96 97 98 99
node 0 size: 1031771 MB
node 0 free: 1026971 MB
node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 100 101 102
103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119
node 1 size: 1032181 MB
node 1 free: 1027783 MB
node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 120 121 122
123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139
node 2 size: 1032181 MB
node 2 free: 1026914 MB
node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 140 141 142
143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159
node 3 size: 1032144 MB
node 3 free: 1027408 MB
node distances:
node  0  1  2  3
 0:  10  11  20  20
 1:  11  10  20  20
 2:  20  20  10  11
 3:  20  20  11  10
```

From /proc/meminfo

```
MemTotal: 4227358288 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Platform Notes (Continued)

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
ondemand
```

```
From /etc/*release* /etc/*version*
```

```
os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

```
uname -a:
```

```
Linux localhost 5.3.18-24.61-preempt #1 SMP PREEMPT Wed Apr 14 10:10:07 UTC 2021
(c41a65c) x86_64 x86_64 x86_64 GNU/Linux
```

```
Kernel self-reported vulnerability status:
```

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 5 May 14 11:32
```

```
SPEC is set to: /home/admin/benchmarks/SPECcpu2017
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdcl	ext4	1.4T	106G	1.2T	9%	/home/admin/benchmarks/SPECcpu2017

```
From /sys/devices/virtual/dmi/id
```

```
Vendor: Nettrix
Product: N/A
Product Family: Family
Serial: N/A
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
32x Hynix HMABAGL7ABR4N-XN 128 GB 4 rank 3200

BIOS:
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 0PYH001029
BIOS Date: 04/14/2021
BIOS Revision: 0.29

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)
=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Compiler Version Notes (Continued)

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

521.wrf_r: ifort icc

527.cam4_r: ifort icx

Benchmarks using both C and C++:

511.povray_r: icpc icc

526.blender_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-Ofast -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 489

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_fp_peak = 542

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Apr-2021

Peak Optimization Flags (Continued)

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V4.0-ICX-revC.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V4.0-ICX-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-05-14 06:25:12-0400.

Report generated on 2021-06-17 11:18:40 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-16.