



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125

SPECspeed®2017_fp_energy_base = 749

SPECspeed®2017_fp_peak = 128

SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

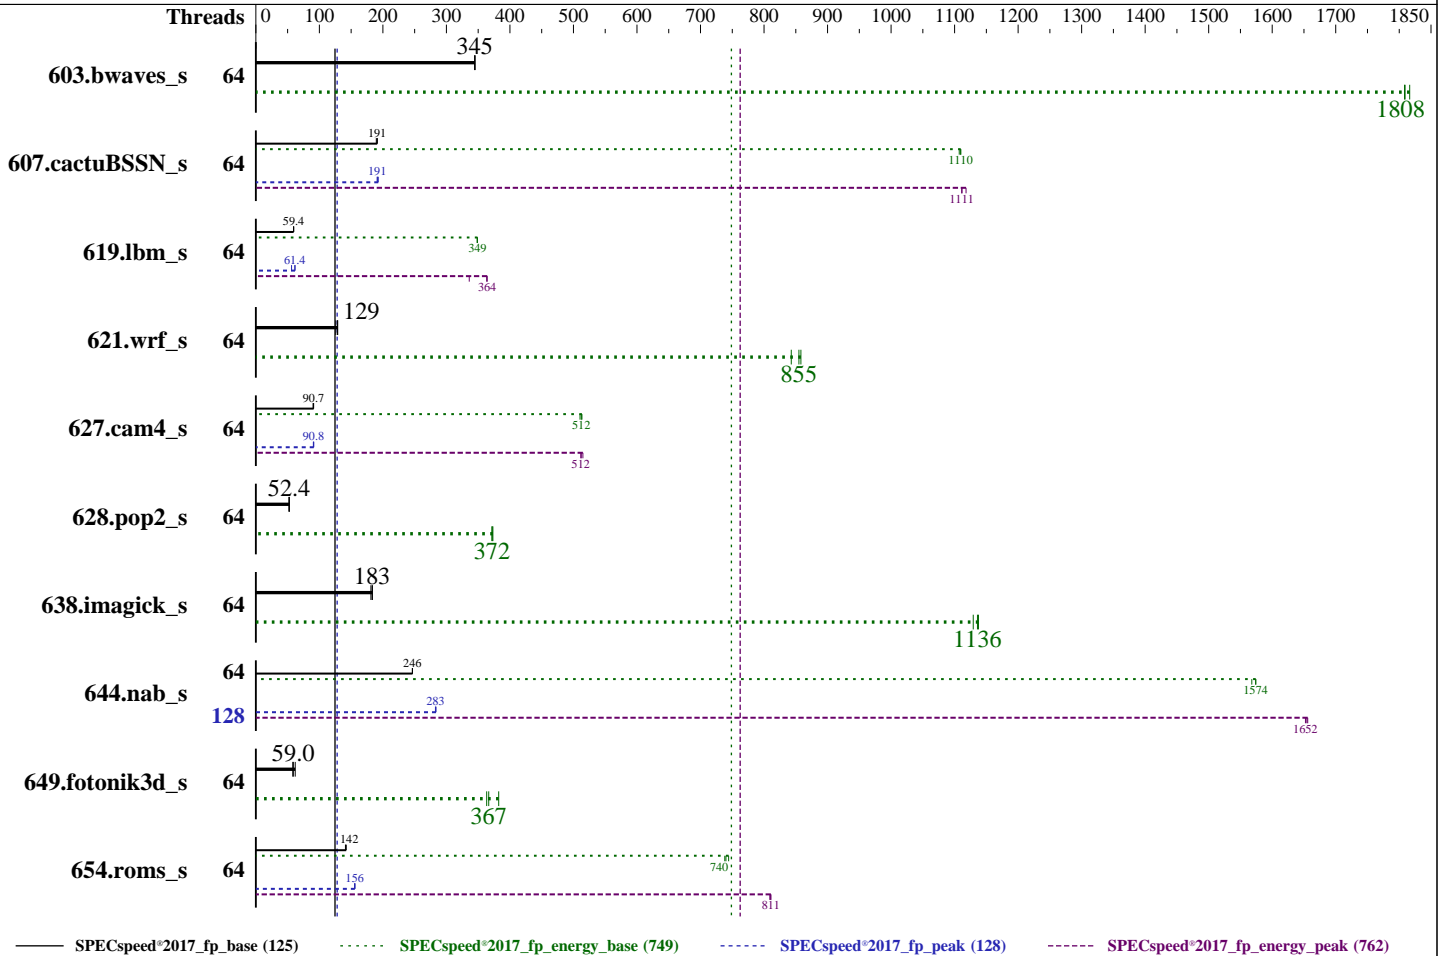

Hardware

CPU Name: AMD EPYC 7713P
 Max MHz: 3675
 Nominal: 2000
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 8 cores
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC4-3200AA-R, running at 2933)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86_64)
 Kernel 5.3.18-22-default
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: Yes
 Firmware: Lenovo BIOS Version CFE125S 6.0 released May-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to balance power and performance



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Power

Max. Power (W): 224.7
Idle Power (W): 94.06
Min. Temperature (C): 23.31
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires
Provisioning: Line-powered

Power Settings

Management FW: Version 4.11 of AMBT23L
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 750 W (non-redundant)
Details: ThinkSystem 750W Titanium Power Supply 7N67A00884
Backplane: 8 x 2.5-inch HDD back plane
Other Storage: None
Storage Model #: 4XB7A10239
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #: 6 x High Performance fans

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3UD17023E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: GUANG ZHOU GRG METROLOGY & TEST CO..LTD.
Calibration Label: J202009040176A-0001
Calibration Date: 25-Sep-2020
PTDaemon® Version: 1.9.2 (3976349f; 2020-12-08)
Setup Description: Connected to PSU1
Current Ranges Used: 1A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: W62330940
Input Connection: USB
PTDaemon Version: 1.9.2 (3976349f; 2020-12-08)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	64	171	345	35.4	1820	207	212	171	345	35.6	1810	208	212	171	345	35.6	1810	208	213
607.cactuBSSN_s	64	87.3	191	16.4	1110	188	202	87.3	191	16.4	1110	188	202	87.9	190	16.5	1110	187	201
619.lbm_s	64	88.2	59.4	17.1	348	194	210	88.0	59.5	17.1	349	194	211	88.2	59.4	17.1	349	193	211
621.wrf_s	64	103	129	16.8	858	164	166	103	129	16.9	855	164	166	105	126	17.1	843	163	165
627.cam4_s	64	98.4	90.1	18.9	510	192	225	97.4	91.0	18.8	513	193	224	97.7	90.7	18.8	512	193	224
628.pop2_s	64	227	52.3	35.1	372	155	159	227	52.4	35.1	372	155	160	226	52.6	35.0	373	155	159
638.imagick_s	64	79.6	181	13.9	1130	175	200	78.6	183	13.8	1140	176	200	78.8	183	13.8	1140	176	200
644.nab_s	64	70.9	246	12.1	1570	170	180	70.9	247	12.1	1570	170	179	70.9	246	12.1	1570	171	179
649.fotonik3d_s	64	155	59.0	27.9	367	181	195	147	62.0	26.8	382	182	198	157	58.2	28.2	363	180	195
654.roms_s	64	111	142	23.8	740	214	219	112	141	23.8	738	214	219	111	142	23.7	744	214	219

SPECspeed®2017_fp_base = 125

SPECspeed®2017_fp_energy_base = 749

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	64	171	345	35.4	1820	207	212	171	345	35.6	1810	208	212	171	345	35.6	1810	208	213
607.cactuBSSN_s	64	87.2	191	16.4	1110	188	202	86.5	193	16.3	1120	189	203	87.1	191	16.4	1110	188	203
619.lbm_s	64	85.3	61.4	16.3	364	192	209	85.0	61.6	16.4	363	193	210	93.2	56.2	17.7	336	190	209
621.wrf_s	64	103	129	16.8	858	164	166	103	129	16.9	855	164	166	105	126	17.1	843	163	165
627.cam4_s	64	97.3	91.1	18.7	515	193	224	97.9	90.5	18.8	512	192	222	97.6	90.8	18.9	512	193	224
628.pop2_s	64	227	52.3	35.1	372	155	159	227	52.4	35.1	372	155	160	226	52.6	35.0	373	155	159
638.imagick_s	64	79.6	181	13.9	1130	175	200	78.6	183	13.8	1140	176	200	78.8	183	13.8	1140	176	200
644.nab_s	128	61.8	283	11.5	1650	186	197	61.6	284	11.5	1660	186	198	61.7	283	11.5	1650	186	197
649.fotonik3d_s	64	155	59.0	27.9	367	181	195	147	62.0	26.8	382	182	198	157	58.2	28.2	363	180	195
654.roms_s	64	101	156	21.7	811	215	220	101	156	21.8	809	215	222	101	156	21.7	810	215	221

SPECspeed®2017_fp_peak = 128

SPECspeed®2017_fp_energy_peak = 762

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s, and 638.imagick_s,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 644.nab_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.7-amd-aocc300-milan-B1/amd_speed_aocc300_milan_B_lib/
64;/home/cpu2017-1.1.7-amd-aocc300-milan-B1/amd_speed_aocc300_milan_B_li
b/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0 64 1 65 2 66 3 67 4 68 5 69 6 70 7 71 8 72 9 73 10 74
11 75 12 76 13 77 14 78 15 79 16 80 17 81 18 82 19 83 20 84 21 85 22 86
23 87 24 88 25 89 26 90 27 91 28 92 29 93 30 94 31 95 32 96 33 97 34 98
35 99 36 100 37 101 38 102 39 103 40 104 41 105 42 106 43 107 44 108 45
109 46 110 47 111 48 112 49 113 50 114 51 115 52 116 53 117 54 118 55
119 56 120 57 121 58 122 59 123 60 124 61 125 62 126 63 127"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-63"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:

Core Performance Boost set to Disabled

NUMA nodes per socket set to NPS2

Sysinfo program /home/cpu2017-1.1.7-amd-aocc300-milan-B1/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on localhost Sat Apr 18 08:50:53 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7713P 64-Core Processor

1 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 64

siblings : 128

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24

25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52

53 54 55 56 57 58 59 60 61 62 63

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECSpeed®2017_fp_base = 125
SPECSpeed®2017_fp_energy_base = 749
SPECSpeed®2017_fp_peak = 128
SPECSpeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```
Address sizes:      48 bits physical, 48 bits virtual
CPU(s):             128
On-line CPU(s) list: 0-127
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s):          1
NUMA node(s):       2
Vendor ID:           AuthenticAMD
CPU family:          25
Model:               1
Model name:          AMD EPYC 7713P 64-Core Processor
Stepping:            1
CPU MHz:             1795.964
CPU max MHz:         2000.0000
CPU min MHz:         1500.0000
BogoMIPS:            3992.18
Virtualization:      AMD-V
L1d cache:           32K
L1i cache:           32K
L2 cache:            512K
L3 cache:            32768K
NUMA node0 CPU(s):  0-31,64-95
NUMA node1 CPU(s):  32-63,96-127
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88
89 90 91 92 93 94 95
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```
node 0 size: 128821 MB
node 0 free: 128131 MB
node 1 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112
113 114 115 116 117 118 119 120 121 122 123 124 125 126 127
node 1 size: 128960 MB
node 1 free: 128123 MB
node distances:
node    0    1
  0:   10   12
  1:   12   10
```

```
From /proc/meminfo
MemTotal:      263968528 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 15 SP2
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

```
uname -a:
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit):      Not affected
CVE-2018-3620 (L1 Terminal Fault):   Not affected
Microarchitectural Data Sampling:   Not affected
CVE-2017-5754 (Meltdown):           Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):
 CVE-2017-5715 (Spectre variant 2):
 CVE-2020-0543 (Special Register Buffer Data Sampling):
 CVE-2019-11135 (TSX Asynchronous Abort):

Bypass disabled via prctl and seccomp
 Mitigation: usercopy/swapgs barriers and __user pointer sanitization
 Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
 Not affected
 Not affected

run-level 3 Apr 17 21:13

SPEC is set to: /home/cpu2017-1.1.7-amd-aocc300-milan-B1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/md126p3	xfs	892G	34G	858G	4%	/

From /sys/devices/virtual/dmi/id

Vendor: Lenovo
 Product: ThinkSystem SR655 -[7Y00000000]-
 Product Family: ThinkSystem
 Serial: 0123456789

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
 8x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200, configured at 2933
 8x Unknown Unknown

BIOS:
 BIOS Vendor: Lenovo
 BIOS Version: CFE125S
 BIOS Date: 05/11/2021
 BIOS Revision: 6.0

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
654.roms_s(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
628.pop2_s(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECSpeed®2017_fp_base = 125
SPECSpeed®2017_fp_energy_base = 749
SPECSpeed®2017_fp_peak = 128
SPECSpeed®2017_fp_energy_peak = 762

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECSpeed®2017_fp_base = 125
SPECSpeed®2017_fp_energy_base = 749
SPECSpeed®2017_fp_peak = 128
SPECSpeed®2017_fp_energy_peak = 762

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fltto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

638.imagick_s: basepeak = yes

644.nab_s: -m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -freemap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

644.nab_s (continued):

-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Mrecursive
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

628.pop2_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fltto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.html>
<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.xml>
<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECspeed®2017_fp_base = 125
SPECspeed®2017_fp_energy_base = 749
SPECspeed®2017_fp_peak = 128
SPECspeed®2017_fp_energy_peak = 762

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.7 on 2020-04-17 20:50:52-0400.
Report generated on 2021-06-08 20:07:31 by CPU2017 PDF formatter v6442.
Originally published on 2021-06-08.