



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR635 3.70 GHz, AMD EPYC 72F3

SPECspeed®2017_int_base = 12.7

SPECspeed®2017_int_energy_base = 118

SPECspeed®2017_int_peak = 12.7

SPECspeed®2017_int_energy_peak = 119

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

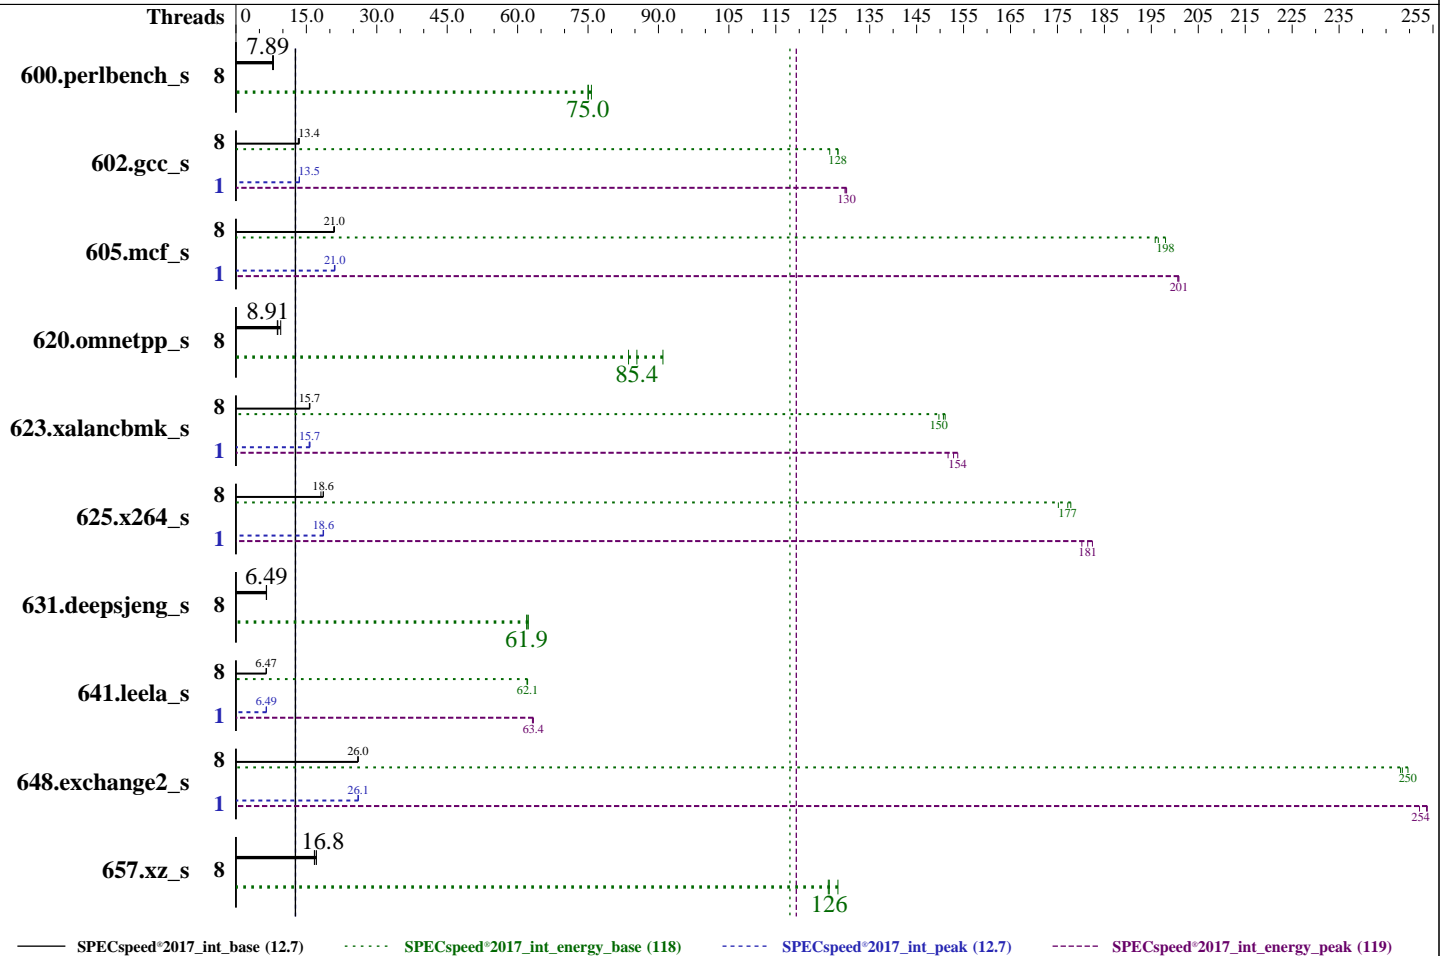

Hardware

CPU Name: AMD EPYC 72F3
 Max MHz: 4100
 Nominal: 3700
 Enabled: 8 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB per core
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC4-3200AA-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86_64)
 Kernel 5.3.18-22-default
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: Yes
 Firmware: Lenovo BIOS Version CFE125S 6.0 released May-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to balance power and performance



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR635 3.70 GHz, AMD EPYC 72F3

SPECSpeed®2017_int_base = 12.7
SPECSpeed®2017_int_energy_base = 118
SPECSpeed®2017_int_peak = 12.7
SPECSpeed®2017_int_energy_peak = 119

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Power

Max. Power (W): 182.43
Idle Power (W): 61.13
Min. Temperature (C): 23.00
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires
Provisioning: Line-powered

Power Settings

Management FW: Version 4.11 of AMBT23L
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 750 W (non-redundant)
Details: ThinkSystem 750W Platinum Power Supply 7N67A00883
Backplane: 10 x 2.5-inch HDD back plane
Other Storage: None
Storage Model #: 4XB7A10239
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #: 7 x High Performance fans

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3UD17023E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: GUANG ZHOU GRG METROLOGY & TEST CO.,LTD.
Calibration Label: J202009040176A-0001
Calibration Date: 25-Sep-2020
PTDaemon® Version: 1.9.2 (3976349f; 2020-12-08)
Setup Description: Connected to PSU1
Current Ranges Used: 1A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: W62330940
Input Connection: USB
PTDaemon Version: 1.9.2 (3976349f; 2020-12-08)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

| Benchmark | Threads | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power |
|-----------------|---------|-------------|-------------|-------------|--------------|---------------|---------------|-------------|-------------|-------------|--------------|---------------|---------------|------------|-------------|-------------|--------------|---------------|---------------|
| 600.perlbench_s | 8 | 222 | 7.98 | 25.4 | 75.7 | 114 | 116 | 225 | 7.89 | 25.7 | 75.0 | 114 | 116 | 227 | 7.81 | 25.7 | 75.1 | 113 | 115 |
| 602.gcc_s | 8 | 300 | 13.3 | 34.2 | 126 | 114 | 118 | 297 | 13.4 | 33.8 | 128 | 114 | 117 | 295 | 13.5 | 33.7 | 128 | 114 | 117 |
| 605.mcf_s | 8 | 225 | 21.0 | 26.0 | 198 | 115 | 119 | 225 | 21.0 | 26.2 | 196 | 117 | 121 | 227 | 20.8 | 26.3 | 196 | 116 | 120 |
| 620.omnetpp_s | 8 | 171 | 9.54 | 19.5 | 91.0 | 114 | 115 | 185 | 8.81 | 21.2 | 83.6 | 115 | 115 | 183 | 8.91 | 20.8 | 85.4 | 114 | 114 |
| 623.xalancbmk_s | 8 | 90.4 | 15.7 | 10.3 | 150 | 114 | 117 | 90.6 | 15.6 | 10.2 | 151 | 113 | 115 | 90.0 | 15.7 | 10.2 | 151 | 113 | 116 |
| 625.x264_s | 8 | 97.5 | 18.1 | 11.0 | 175 | 112 | 115 | 94.9 | 18.6 | 10.8 | 177 | 114 | 116 | 94.8 | 18.6 | 10.8 | 178 | 114 | 116 |
| 631.deepsjeng_s | 8 | 220 | 6.52 | 25.1 | 62.0 | 114 | 118 | 221 | 6.48 | 25.0 | 62.3 | 113 | 117 | 221 | 6.49 | 25.2 | 61.9 | 114 | 117 |
| 641.leela_s | 8 | 264 | 6.47 | 29.8 | 62.1 | 113 | 114 | 264 | 6.47 | 29.7 | 62.1 | 113 | 113 | 264 | 6.46 | 29.8 | 62.0 | 113 | 114 |
| 648.exchange2_s | 8 | 113 | 26.0 | 12.9 | 248 | 114 | 115 | 113 | 26.0 | 12.8 | 250 | 113 | 115 | 113 | 26.0 | 12.9 | 248 | 114 | 115 |
| 657.xz_s | 8 | 368 | 16.8 | 53.3 | 126 | 145 | 181 | 370 | 16.7 | 53.4 | 126 | 144 | 181 | 361 | 17.1 | 52.5 | 128 | 146 | 182 |

SPECSpeed®2017_int_base = 12.7

SPECSpeed®2017_int_energy_base = 118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR635
3.70 GHz, AMD EPYC 72F3

SPECSpeed®2017_int_base = 12.7
SPECSpeed®2017_int_energy_base = 118
SPECSpeed®2017_int_peak = 12.7
SPECSpeed®2017_int_energy_peak = 119

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Peak Results Table

| Benchmark | Threads | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power |
|-----------------|---------|------------|-------------|-------------|--------------|---------------|---------------|-------------|-------------|-------------|--------------|---------------|---------------|-------------|-------------|-------------|--------------|---------------|---------------|
| 600.perlbench_s | 8 | 222 | 7.98 | 25.4 | 75.7 | 114 | 116 | 225 | 7.89 | 25.7 | 75.0 | 114 | 116 | 227 | 7.81 | 25.7 | 75.1 | 113 | 115 |
| 602.gcc_s | 1 | 295 | 13.5 | 33.3 | 130 | 113 | 116 | 295 | 13.5 | 33.4 | 130 | 113 | 116 | 295 | 13.5 | 33.3 | 130 | 113 | 116 |
| 605.mcf_s | 1 | 224 | 21.1 | 25.7 | 201 | 114 | 119 | 225 | 21.0 | 25.7 | 201 | 114 | 118 | 224 | 21.0 | 25.6 | 201 | 114 | 118 |
| 620.omnetpp_s | 8 | 171 | 9.54 | 19.5 | 91.0 | 114 | 115 | 185 | 8.81 | 21.2 | 83.6 | 115 | 115 | 183 | 8.91 | 20.8 | 85.4 | 114 | 114 |
| 623.xalanbmk_s | 1 | 90.0 | 15.8 | 10.1 | 153 | 112 | 114 | 90.2 | 15.7 | 10.0 | 154 | 111 | 114 | 90.9 | 15.6 | 10.1 | 152 | 112 | 114 |
| 625.x264_s | 1 | 95.0 | 18.6 | 10.7 | 180 | 112 | 114 | 94.5 | 18.7 | 10.5 | 182 | 111 | 113 | 94.7 | 18.6 | 10.6 | 181 | 112 | 114 |
| 631.deepsjeng_s | 8 | 220 | 6.52 | 25.1 | 62.0 | 114 | 118 | 221 | 6.48 | 25.0 | 62.3 | 113 | 117 | 221 | 6.49 | 25.2 | 61.9 | 114 | 117 |
| 641.leela_s | 1 | 263 | 6.49 | 29.2 | 63.3 | 111 | 112 | 265 | 6.45 | 29.3 | 63.2 | 111 | 111 | 263 | 6.49 | 29.2 | 63.4 | 111 | 111 |
| 648.exchange2_s | 1 | 113 | 26.0 | 12.7 | 252 | 112 | 113 | 113 | 26.1 | 12.6 | 254 | 112 | 113 | 113 | 26.1 | 12.6 | 254 | 112 | 114 |
| 657.xz_s | 8 | 368 | 16.8 | 53.3 | 126 | 145 | 181 | 370 | 16.7 | 53.4 | 126 | 144 | 181 | 361 | 17.1 | 52.5 | 128 | 146 | 182 |

SPECSpeed®2017_int_peak = 12.7

SPECSpeed®2017_int_energy_peak = 119

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR635
3.70 GHz, AMD EPYC 72F3

SPECspeed®2017_int_base = 12.7
SPECspeed®2017_int_energy_base = 118
SPECspeed®2017_int_peak = 12.7
SPECspeed®2017_int_energy_peak = 119

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root to enable Transparent Hugepages (THP) for this run.
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for peak runs of 628.pop2_s and 638.imagick_s to enable THP only on request.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-15"
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.7-amd-aocc300-milan-B1/amd_speed_aocc300_milan_B_lib/
64;/home/cpu2017-1.1.7-amd-aocc300-milan-B1/amd_speed_aocc300_milan_B_li
b/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "16"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "0"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR635
3.70 GHz, AMD EPYC 72F3

SPECspeed®2017_int_base = 12.7
SPECspeed®2017_int_energy_base = 118
SPECspeed®2017_int_peak = 12.7
SPECspeed®2017_int_energy_peak = 119

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:
Memory Speed set to Auto
NUMA nodes per socket set to NPS2
SOC P-states set to P3

Sysinfo program /home/cpu2017-1.1.7-amd-aocc300-milan-B1/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost Mon May 24 21:20:01 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 72F3 8-Core Processor
1 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 16
On-line CPU(s) list: 0-15
Thread(s) per core: 2

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR635
3.70 GHz, AMD EPYC 72F3

SPECspeed®2017_int_base = 12.7
SPECspeed®2017_int_energy_base = 118
SPECspeed®2017_int_peak = 12.7
SPECspeed®2017_int_energy_peak = 119

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```
Core(s) per socket: 8
Socket(s): 1
NUMA node(s): 2
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 72F3 8-Core Processor
Stepping: 1
CPU MHz: 1794.476
CPU max MHz: 3700.0000
CPU min MHz: 1500.0000
BogoMIPS: 7386.31
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 32768K
NUMA node0 CPU(s): 0-3,8-11
NUMA node1 CPU(s): 4-7,12-15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 8 9 10 11
node 0 size: 128826 MB
node 0 free: 128497 MB
node 1 cpus: 4 5 6 7 12 13 14 15
node 1 size: 128973 MB
node 1 free: 128628 MB
node distances:
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR635
3.70 GHz, AMD EPYC 72F3

SPECspeed®2017_int_base = 12.7
SPECspeed®2017_int_energy_base = 118
SPECspeed®2017_int_peak = 12.7
SPECspeed®2017_int_energy_peak = 119

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```
node    0    1
0:     10   12
1:     12   10
```

```
From /proc/meminfo
MemTotal:      263986864 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
schedutil
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="/o:suse:sles:15:sp2"
```

```
uname -a:
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):                Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2):       Mitigation: Full AMD retpoline,
IBPB: conditional, IBRS_FW, STIBP:
always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR635
3.70 GHz, AMD EPYC 72F3

SPECspeed®2017_int_base = 12.7
SPECspeed®2017_int_energy_base = 118
SPECspeed®2017_int_peak = 12.7
SPECspeed®2017_int_energy_peak = 119

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

run-level 3 May 24 21:16

SPEC is set to: /home/cpu2017-1.1.7-amd-aocc300-milan-B1
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 892G 41G 851G 5% /

From /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR635 -[7Y98XXXXXX]-
Product Family: ThinkSystem
Serial: 0123456789

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
 8x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200
 8x Unknown Unknown

BIOS:
 BIOS Vendor: Lenovo
 BIOS Version: CFE125S
 BIOS Date: 05/11/2021
 BIOS Revision: 6.0

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
 | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
 LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
 | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR635
3.70 GHz, AMD EPYC 72F3

SPECspeed®2017_int_base = 12.7
SPECspeed®2017_int_energy_base = 118
SPECspeed®2017_int_peak = 12.7
SPECspeed®2017_int_energy_peak = 119

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran | 648.exchange2_s(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR635
3.70 GHz, AMD EPYC 72F3

SPECspeed®2017_int_base = 12.7
SPECspeed®2017_int_energy_base = 118
SPECspeed®2017_int_peak = 12.7
SPECspeed®2017_int_energy_peak = 119

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Base Portability Flags (Continued)

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR635
3.70 GHz, AMD EPYC 72F3

SPECSpeed®2017_int_base = 12.7
SPECSpeed®2017_int_energy_base = 118
SPECSpeed®2017_int_peak = 12.7
SPECSpeed®2017_int_energy_peak = 119

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP  
-fopenmp -fopenmp=libomp -lomp -landlibm -ljemalloc -lflang  
-lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR635
3.70 GHz, AMD EPYC 72F3

SPECspeed®2017_int_base = 12.7
SPECspeed®2017_int_energy_base = 118
SPECspeed®2017_int_peak = 12.7
SPECspeed®2017_int_energy_peak = 119

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

600.perlbench_s: basepeak = yes

```
602.gcc_s: -m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

605.mcf_s: Same as 602.gcc_s

625.x264_s: Same as 602.gcc_s

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

631.deepsjeng_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR635
3.70 GHz, AMD EPYC 72F3

SPECSpeed®2017_int_base = 12.7
SPECSpeed®2017_int_energy_base = 118
SPECSpeed®2017_int_peak = 12.7
SPECSpeed®2017_int_energy_peak = 119

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

641.leela_s: Same as 623.xalancbmk_s

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.html>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.xml>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

PTDaemon, SPEC CPU, and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.7 on 2021-05-24 09:20:00-0400.

Report generated on 2021-06-08 20:09:27 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-08.