



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M6 (Intel Xeon Platinum 8368Q, 2.60GHz)

SPECspeed®2017\_int\_base = 12.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

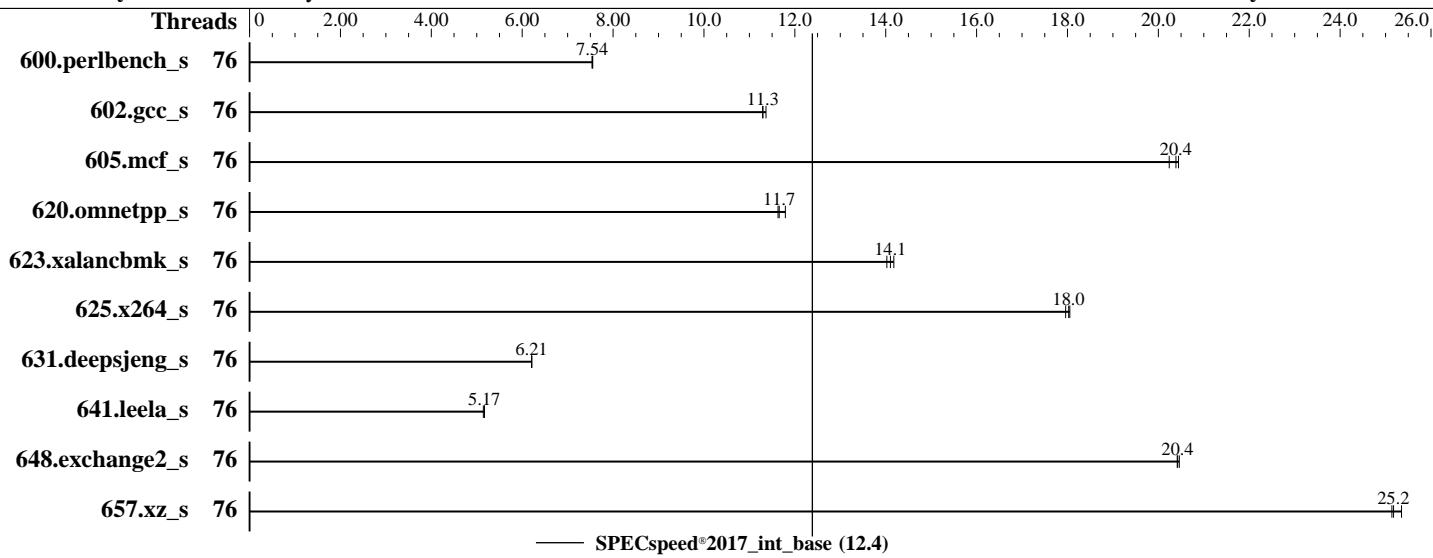

### Hardware

CPU Name: Intel Xeon Platinum 8368Q  
Max MHz: 3700  
Nominal: 2600  
Enabled: 76 cores, 2 chips  
Orderable: 1,2 Chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1.25 MB I+D on chip per core  
L3: 57 MB I+D on chip per chip  
Other: None  
Memory: 2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 240 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2  
5.3.18-22-default  
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
Parallel: Yes  
Firmware: Version 4.2.1c released Jul-2021  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M6 (Intel Xeon Platinum 8368Q, 2.60GHz)

SPECspeed®2017\_int\_base = 12.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	76	235	7.55	<u>235</u>	<u>7.54</u>	235	7.54							
602.gcc_s	76	350	11.4	<u>352</u>	<u>11.3</u>	353	11.3							
605.mcf_s	76	231	20.4	233	20.2	<u>232</u>	<u>20.4</u>							
620.omnetpp_s	76	138	11.8	140	11.6	<u>140</u>	<u>11.7</u>							
623.xalancbmk_s	76	99.9	14.2	101	14.0	<u>100</u>	<u>14.1</u>							
625.x264_s	76	97.7	18.1	98.2	18.0	<u>97.9</u>	<u>18.0</u>							
631.deepsjeng_s	76	231	6.21	<u>231</u>	<u>6.21</u>	231	6.21							
641.leela_s	76	330	5.17	<u>330</u>	<u>5.17</u>	332	5.14							
648.exchange2_s	76	<u>144</u>	<u>20.4</u>	144	20.4	144	20.5							
657.xz_s	76	<u>246</u>	<u>25.2</u>	246	25.1	244	25.4							

SPECspeed®2017\_int\_base = 12.4

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7940X CPU + 64GB RAM memory using openSUSE Leap 15.2

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

SPECspeed®2017\_int\_base = 12.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2021

Tested by: Cisco Systems

Software Availability: Dec-2020

## General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

### BIOS Settings:

Intel Hyper-Threading Technology set to Disabled  
Adjacent Cache Line Prefetcher set to Disabled  
DCU Streamer Prefetch set to Disabled  
UPI Link Enablement set to 1  
UPI Power Management set to Enabled  
LLC Dead Line set to Disabled  
Memory Refresh Rate set to 1x Refresh  
ADDDC Sparing set to Disabled  
Patrol Scrub set to Disabled  
Enhanced CPU performance set to Auto  
Energy Efficient Turbo set to Enabled  
Processor C6 Report set to Enabled  
Processor C1E set to Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on install Wed Jul 28 10:35:14 2021
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
  2 "physical id"s (chips)
  76 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 38
  siblings   : 38
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

SPECspeed®2017\_int\_base = 12.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2021

Tested by: Cisco Systems

Software Availability: Dec-2020

## Platform Notes (Continued)

```
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37
```

From lscpu from util-linux 2.33.1:

```
Architecture: x86_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
Address sizes: 46 bits physical, 57 bits virtual  
CPU(s): 76  
On-line CPU(s) list: 0-75  
Thread(s) per core: 1  
Core(s) per socket: 38  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 106  
Model name: Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz  
Stepping: 6  
CPU MHz: 800.323  
CPU max MHz: 3700.0000  
CPU min MHz: 800.0000  
BogoMIPS: 5200.00  
Virtualization: VT-x  
L1d cache: 48K  
L1i cache: 32K  
L2 cache: 1280K  
L3 cache: 58368K  
NUMA node0 CPU(s): 0-37  
NUMA node1 CPU(s): 38-75  
Flags: fpu vme de pse tsc msr pae cx8 apic sep mtrr pge mca cmov  
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid  
aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16  
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave  
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 invpcid_single ssbd  
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad  
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f  
avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni  
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total  
cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp  
hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni  
avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d  
arch_capabilities
```

```
/proc/cpuinfo cache data  
cache size : 58368 KB
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

SPECspeed®2017\_int\_base = 12.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2021

Tested by: Cisco Systems

Software Availability: Dec-2020

## Platform Notes (Continued)

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37
node 0 size: 1031742 MB
node 0 free: 1031122 MB
node 1 cpus: 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62
63 64 65 66 67 68 69 70 71 72 73 74 75
node 1 size: 1032178 MB
node 1 free: 1031559 MB
node distances:
node    0    1
 0:   10   20
 1:   20   10
```

From /proc/meminfo

```
MemTotal:      2113454812 kB
HugePages_Total:       0
Hugepagesize:        2048 kB
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
performance

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="SLES"
  VERSION="15-SP2"
  VERSION_ID="15.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

uname -a:

```
Linux install 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeба) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M6 (Intel Xeon Platinum 8368Q, 2.60GHz)

SPECspeed®2017\_int\_base = 12.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2021

Tested by: Cisco Systems

Software Availability: Dec-2020

## Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):

Bypass disabled via prctl and seccomp

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Jul 28 10:30

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	222G	15G	206G	7%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Cisco Systems Inc
Product:	UCSC-C240-M6SX
Serial:	WZP24440K0A

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x 0xCE00 M393A8G40AB2-CWE 64 GB 2 rank 3200

BIOS:

BIOS Vendor:	Cisco Systems, Inc.
BIOS Version:	C240M6.4.2.1c.10.0723211453
BIOS Date:	07/23/2021
BIOS Revision:	5.22

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
	625.x264_s(base) 657.xz_s(base)

=====

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

SPECspeed®2017\_int\_base = 12.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2021

Tested by: Cisco Systems

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

```
=====
C++      | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
          | 641.leela_s(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 648.exchange2_s(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECspeed®2017\_int\_base = 12.4**

**SPECspeed®2017\_int\_peak = Not Run**

**Test Date:** Jul-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Dec-2020

## Base Optimization Flags

C benchmarks:

```
-DSPEC_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX512  
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/  
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-revF.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-revF.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-07-28 13:35:14-0400.

Report generated on 2021-08-19 10:56:50 by CPU2017 PDF formatter v6442.

Originally published on 2021-08-17.