



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017_fp_base = 145

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488


Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Feb-2020

Tested by: xFusion

Software Availability: May-2021

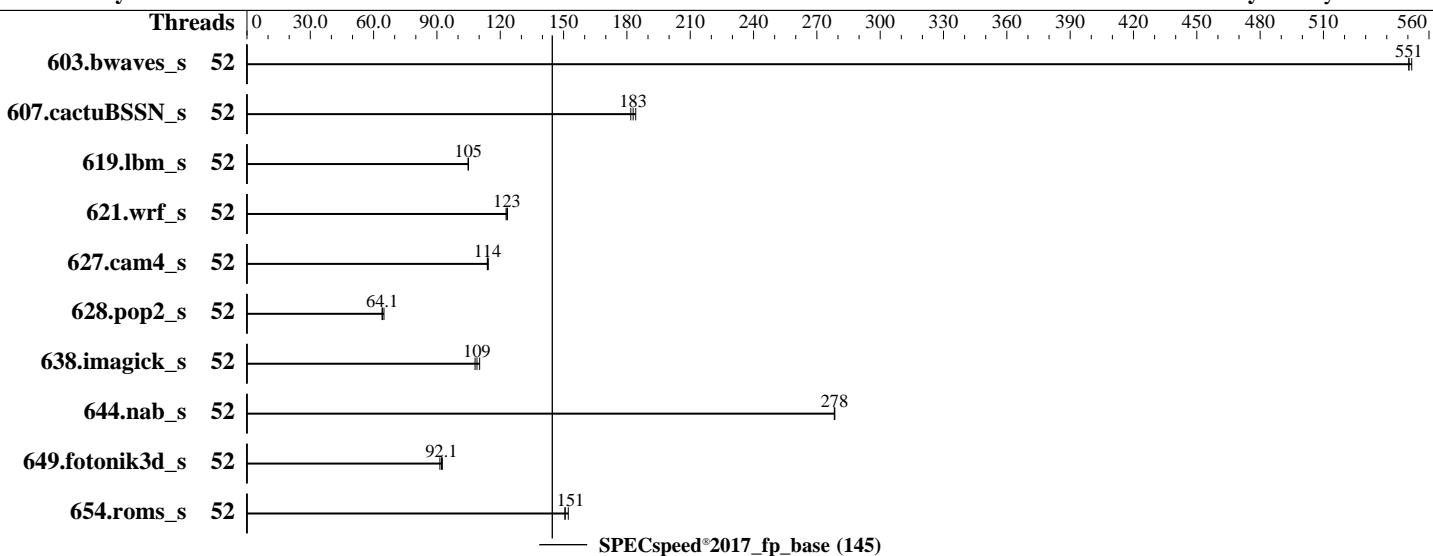

Hardware

CPU Name: Intel Xeon Gold 6230R
 Max MHz: 4000
 Nominal: 2100
 Enabled: 52 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

OS:

Red Hat Enterprise Linux release 8.4 (Ootpa)
4.18.0-305.el8.x86_64

Compiler:

Fortran: Version 2021.1 of Intel Fortran Compiler
Classic Build 20201112 for Linux;
C/C++: Version 2021.1 of Intel C/C++ Compiler
Classic Build 20201112 for Linux

Parallel:

Yes

Firmware:

Version 8.23 Released Dec-2021

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

Not Applicable

Other:

jemalloc memory allocator V5.0.1

Power Management:

BIOS and OS set to prefer performance at the cost
of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 145

xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Feb-2020

Tested by: xFusion

Software Availability: May-2021

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Threads	Seconds	Ratio	Threads	Seconds	Ratio	Threads	Seconds
603.bwaves_s	52	107	551	107	550	107	552									
607.cactubSSN_s	52	90.5	184	91.7	182	91.1	183									
619.lbm_s	52	49.9	105	49.9	105	50.0	105									
621.wrf_s	52	107	123	108	123	107	123									
627.cam4_s	52	77.8	114	77.8	114	77.5	114									
628.pop2_s	52	183	64.9	185	64.1	185	64.1									
638.imagick_s	52	133	108	132	109	131	110									
644.nab_s	52	62.8	278	62.7	279	62.8	278									
649.fotonik3d_s	52	98.9	92.1	99.7	91.4	98.5	92.6									
654.roms_s	52	104	151	103	152	105	151									
SPECspeed®2017_fp_base = 145																
SPECspeed®2017_fp_peak = Not Run																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/spec2017/lib/intel64:/spec2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 145

xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Feb-2020

Tested by: xFusion

Software Availability: May-2021

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Power Policy Set to Load Balance

Hyper-Threading Set to Disabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d

running on localhost.localdomain Fri Apr 1 17:54:11 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6230R CPU @ 2.10GHz
  2 "physical id"s (chips)
  52 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 26
  siblings   : 26
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
  29
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
  29
```

From lscpu from util-linux 2.32.1:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                52
On-line CPU(s) list:  0-51
Thread(s) per core:   1
Core(s) per socket:   26
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6230R CPU @ 2.10GHz
BIOS Model name:       Intel(R) Xeon(R) Gold 6230R CPU @ 2.10GHz
Stepping:               7
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017_fp_base = 145

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Feb-2020

Tested by: xFusion

Software Availability: May-2021

Platform Notes (Continued)

CPU MHz: 1037.845
CPU max MHz: 4000.0000
CPU min MHz: 1000.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-25
NUMA node1 CPU(s): 26-51

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqmq mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavenc xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbmb_total cqmq_mbmb_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld arch_capabilities

/proc/cpuinfo cache data
cache size : 36608 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
node 0 size: 385243 MB
node 0 free: 375791 MB
node 1 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51
node 1 size: 387028 MB
node 1 free: 384890 MB
node distances:
node 0 1
0: 10 21
1: 21 10

From /proc/meminfo
MemTotal: 790806588 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017_fp_base = 145

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Feb-2020

Tested by: xFusion

Software Availability: May-2021

Platform Notes (Continued)

```
/sbin/tuned-adm active
    Current active profile: throughput-performance
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux"
    VERSION="8.4 (Ootpa)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="8.4"
    PLATFORM_ID="platform:el8"
    PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
    ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

KVM: Mitigation: Split huge pages

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Mitigation: Speculative Store

CVE-2018-3639 (Speculative Store Bypass):

Bypass disabled via prctl and

seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs

barriers and __user pointer

sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB:

conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

Mitigation: TSX disabled

CVE-2019-11135 (TSX Asynchronous Abort):

run-level 3 Apr 1 15:53

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	859G	64G	796G	8%	/

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 145

xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Feb-2020

Tested by: xFusion

Software Availability: May-2021

Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

Vendor: XFUSION
Product: 2288H V5
Product Family: Purley
Serial: Serial

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

22x Hynix HMA84GR7CJR4N-WM 32 GB 2 rank 2933
2x Hynix HMA84GR7JJR4N-WM 32 GB 2 rank 2933

BIOS:

BIOS Vendor: INSYDE Corp.
BIOS Version: 8.23
BIOS Date: 12/30/2021
BIOS Revision: 8.23

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
-----
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017_fp_base = 145

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Feb-2020

Tested by: xFusion

Software Availability: May-2021

Compiler Version Notes (Continued)

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.llbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017_fp_base = 145

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2022

Hardware Availability: Feb-2020

Software Availability: May-2021

Base Portability Flags (Continued)

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs  
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 145

xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Feb-2020

Tested by: xFusion

Software Availability: May-2021

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-04-01 17:54:11-0400.

Report generated on 2022-04-29 13:23:42 by CPU2017 PDF formatter v6442.

Originally published on 2022-04-27.