



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 10.9

Inspur NF5280M6 (Intel Xeon Gold 6338)

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2022

Hardware Availability: Sep-2020

Software Availability: Dec-2020

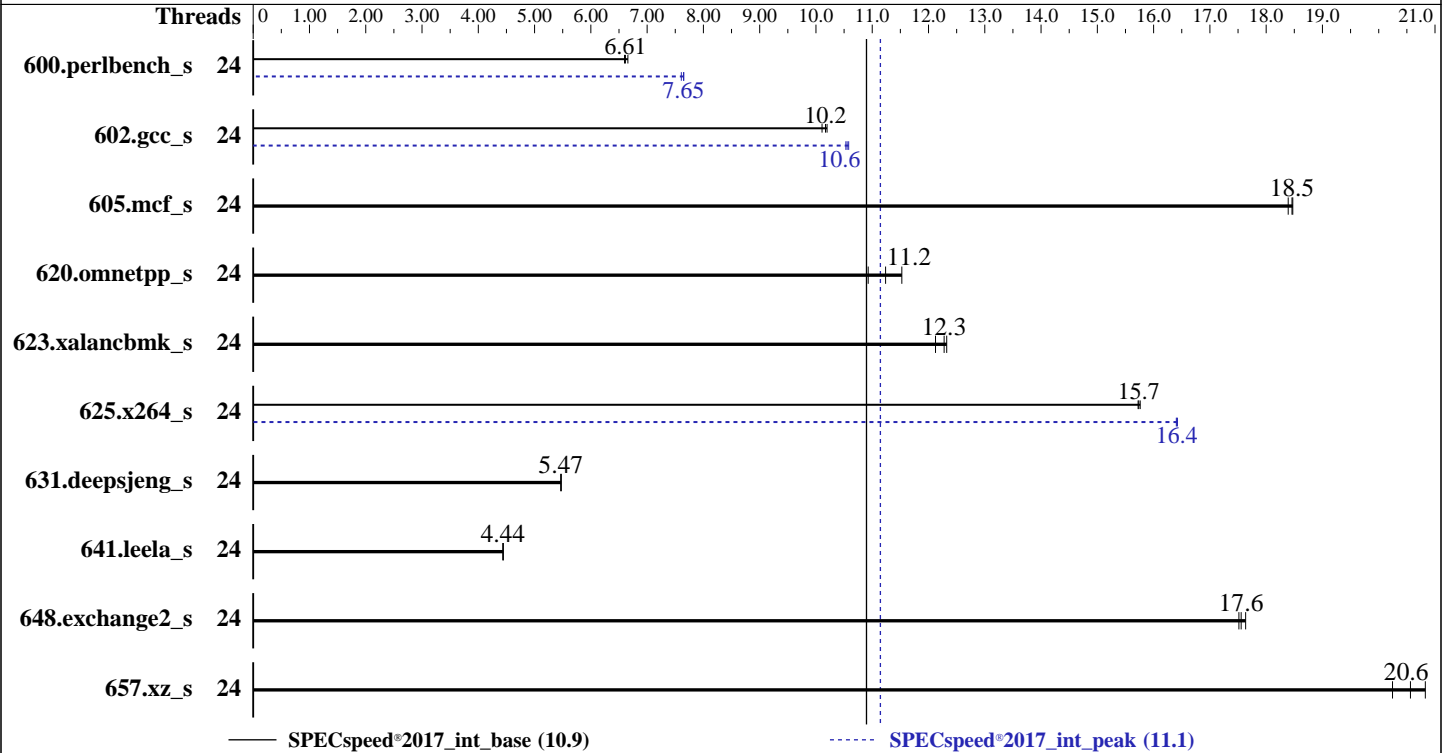

Hardware

CPU Name: Intel Xeon Gold 6338
 Max MHz: 3200
 Nominal: 2000
 Enabled: 24 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 48 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)
 Storage: 1 x 2 TB NVME SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa)
 4.18.0-240.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++
 Compiler Build 20201113 for Linux;
 C/C++: Version 2021.1 of Intel C/C++
 Compiler Classic Build 20201112 for Linux;
 Fortran: Version 2021.1 of Intel Fortran
 Compiler Classic Build 20201112 for Linux
 Parallel: Yes
 Firmware: Version 04.12.02 released Apr-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 10.9

Inspur NF5280M6 (Intel Xeon Gold 6338)

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2022

Hardware Availability: Sep-2020

Software Availability: Dec-2020

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	269	6.60	267	6.66	268	6.61	24	233	7.61	232	7.65	232	7.65
602.gcc_s	24	394	10.1	392	10.2	390	10.2	24	377	10.6	376	10.6	378	10.5
605.mcf_s	24	256	18.5	256	18.5	257	18.4	24	256	18.5	256	18.5	257	18.4
620.omnetpp_s	24	145	11.2	149	10.9	142	11.5	24	145	11.2	149	10.9	142	11.5
623.xalancbmk_s	24	117	12.1	115	12.3	115	12.3	24	117	12.1	115	12.3	115	12.3
625.x264_s	24	112	15.7	112	15.7	112	15.8	24	107	16.4	108	16.4	107	16.4
631.deepsjeng_s	24	262	5.47	262	5.47	262	5.47	24	262	5.47	262	5.47	262	5.47
641.leela_s	24	384	4.44	384	4.44	384	4.44	24	384	4.44	384	4.44	384	4.44
648.exchange2_s	24	167	17.6	167	17.6	168	17.5	24	167	17.6	167	17.6	168	17.5
657.xz_s	24	301	20.6	305	20.2	297	20.8	24	301	20.6	305	20.2	297	20.8

SPECspeed®2017_int_base = **10.9**

SPECspeed®2017_int_peak = **11.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 10.9

Inspur NF5280M6 (Intel Xeon Gold 6338)

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2022

Hardware Availability: Sep-2020

Software Availability: Dec-2020

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS and OS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to Enable
Intel Hyper Threading Technology set to Disable
Scaling_Governor set to Performance

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Sat May 7 14:10:36 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings : 12
physical 0: cores 20 21 22 23 24 25 26 27 28 29 30 31
physical 1: cores 20 21 22 23 24 25 26 27 28 29 30 31

From lscpu from util-linux 2.32.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 24
On-line CPU(s) list: 0-23
Thread(s) per core: 1
Core(s) per socket: 12
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 10.9

Inspur NF5280M6 (Intel Xeon Gold 6338)

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2022

Hardware Availability: Sep-2020

Software Availability: Dec-2020

Platform Notes (Continued)

```

CPU family:          6
Model:              106
Model name:         Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
Stepping:          6
CPU MHz:            3195.806
CPU max MHz:        3200.0000
CPU min MHz:        800.0000
BogoMIPS:           4000.00
Virtualization:     VT-x
L1d cache:          48K
L1i cache:          32K
L2 cache:           1280K
L3 cache:           49152K
NUMA node0 CPU(s): 0-11
NUMA node1 CPU(s): 12-23
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 49152 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 507946 MB
node 0 free: 515184 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23
node 1 size: 510064 MB
node 1 free: 515532 MB
node distances:
node  0  1
  0:  10  20
  1:  20  10

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 10.9

Inspur NF5280M6 (Intel Xeon Gold 6338)

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2022

Hardware Availability: Sep-2020

Software Availability: Dec-2020

Platform Notes (Continued)

From /proc/meminfo

MemTotal: 1056499976 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: hpc-compute

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.3 (Ootpa)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="8.3"

PLATFORM_ID="platform:el8"

PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"

ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:

Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling):

Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 May 7 14:04

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 10.9

Inspur NF5280M6 (Intel Xeon Gold 6338)

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2022

Hardware Availability: Sep-2020

Software Availability: Dec-2020

Platform Notes (Continued)

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.4T	93G	1.3T	7%	/home

From /sys/devices/virtual/dmi/id

```
Vendor:      Inspur
Product:    NF5280M6
Product Family: Family
Serial:     380251214
```

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Micron 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200

BIOS:

```
BIOS Vendor:    American Megatrends Inc.
BIOS Version:   04.12.02
BIOS Date:      04/02/2021
BIOS Revision:  5.21
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C      | 600.perlbench_s(peak)  
-----
```

```
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C      | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)  
      | 625.x264_s(base, peak) 657.xz_s(base, peak)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----  
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 10.9

Inspur NF5280M6 (Intel Xeon Gold 6338)

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2022

Hardware Availability: Sep-2020

Software Availability: Dec-2020

Compiler Version Notes (Continued)

C | 600.perlbench_s(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
625.x264_s(base, peak) 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 10.9

Inspur NF5280M6 (Intel Xeon Gold 6338)

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2022

Hardware Availability: Sep-2020

Software Availability: Dec-2020

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-DSPEC_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX512
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

600.perlbench_s: icc

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 10.9

Inspur NF5280M6 (Intel Xeon Gold 6338)

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2022

Hardware Availability: Sep-2020

Software Availability: Dec-2020

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -DSPEC_OPENMP -fiopenmp -std=c11 -m64 -Wl,-z,muldefs
-xCORE-AVX512 -flto -O3 -ffast-math
-qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

C++ benchmarks:

```
620.omnetpp_s: basepeak = yes
```

```
623.xalancbmk_s: basepeak = yes
```

```
631.deepsjeng_s: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 10.9

Inspur NF5280M6 (Intel Xeon Gold 6338)

SPECspeed®2017_int_peak = 11.1

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2022

Hardware Availability: Sep-2020

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

641.leela_s:basepeak = yes

Fortran benchmarks:

648.exchange2_s:basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-05-07 14:10:36-0400.

Report generated on 2022-05-25 13:14:48 by CPU2017 PDF formatter v6442.

Originally published on 2022-05-24.