



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core) Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: May-2022

Hardware Availability: Aug-2021

Software Availability: Dec-2021

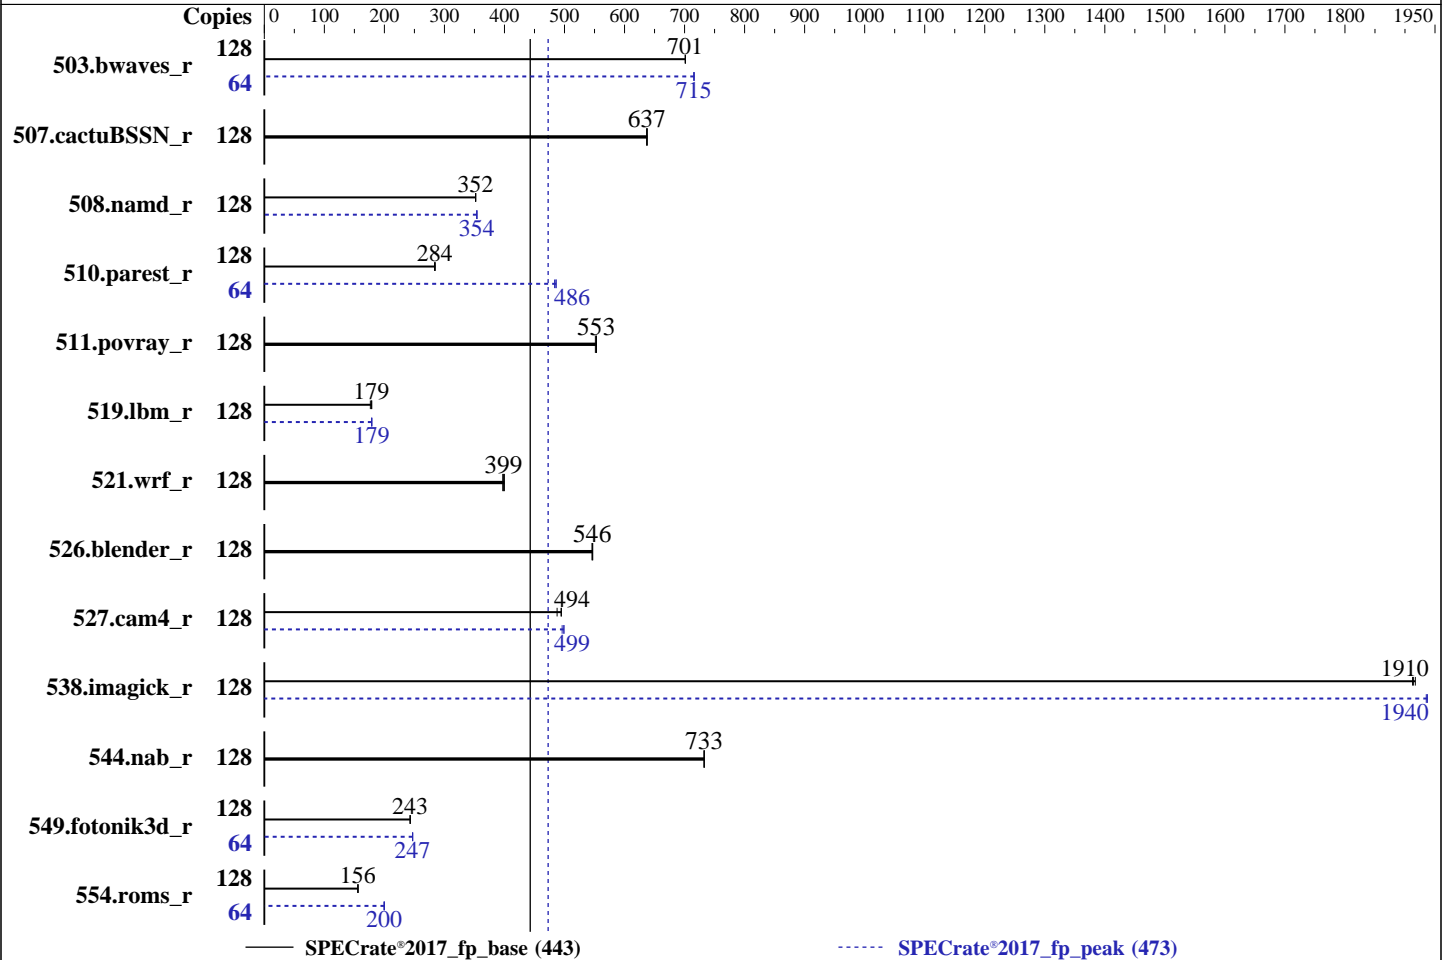

### Hardware

CPU Name: AMD EPYC 7513  
 Max MHz: 3650  
 Nominal: 2600  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86\_64)  
 kernel version 5.3.18-22-default  
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
 Parallel: No  
 Firmware: Version 4.2.1 released Feb-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core) Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** May-2022  
**Hardware Availability:** Aug-2021  
**Software Availability:** Dec-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1830	702	1831	701	<u>1831</u>	<u>701</u>	64	<u>897</u>	<u>715</u>	897	715	896	716
507.cactuBSSN_r	128	<u>254</u>	<u>637</u>	254	638	254	637	128	<u>254</u>	<u>637</u>	254	638	254	637
508.namd_r	128	345	352	<u>345</u>	<u>352</u>	345	352	128	<u>344</u>	<u>354</u>	343	354	344	354
510.parest_r	128	1176	285	<u>1179</u>	<u>284</u>	1181	284	64	<u>345</u>	<u>486</u>	346	483	344	486
511.povray_r	128	540	553	<u>540</u>	<u>553</u>	542	551	128	540	553	<u>540</u>	<u>553</u>	542	551
519.lbm_r	128	<u>755</u>	<u>179</u>	754	179	764	177	128	<u>754</u>	<u>179</u>	754	179	753	179
521.wrf_r	128	717	400	722	397	<u>719</u>	<u>399</u>	128	717	400	722	397	<u>719</u>	<u>399</u>
526.blender_r	128	356	547	<u>357</u>	<u>546</u>	357	546	128	356	547	<u>357</u>	<u>546</u>	357	546
527.cam4_r	128	452	495	459	488	<u>453</u>	<u>494</u>	128	<u>449</u>	<u>499</u>	451	496	449	499
538.imagick_r	128	<u>166</u>	<u>1910</u>	166	1920	166	1910	128	164	1940	164	1940	<u>164</u>	<u>1940</u>
544.nab_r	128	294	733	294	732	<u>294</u>	<u>733</u>	128	294	733	294	732	<u>294</u>	<u>733</u>
549.fotonik3d_r	128	2052	243	<u>2053</u>	<u>243</u>	2053	243	64	1009	247	1010	247	<u>1010</u>	<u>247</u>
554.roms_r	128	1307	156	1301	156	<u>1305</u>	<u>156</u>	64	508	200	<u>510</u>	<u>200</u>	510	199

SPECrate®2017\_fp\_base = **443**

SPECrate®2017\_fp\_peak = **473**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** May-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_rate_  
    aocc320_milanx_A_lib/lib32:"  
MALLOCONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Configuration

SMT Mode set to Enabled

NUMA nodes per socket set to NPS4

ACPI SRAT L3 Cache As NUMA Domain set to Enabled

DRAM Scrub Time set to Disabled

Determinism Slider set to Power

Memory Interleaving set to Disabled

APBDIS set to 1

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core) Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** May-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

### Platform Notes (Continued)

sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Tue May 10 15:10:18 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7513 32-Core Processor
 2 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

From lscpu from util-linux 2.33.1:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 128
On-line CPU(s) list: 0-127
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7513 32-Core Processor
Stepping: 1
CPU MHz: 2678.248
CPU max MHz: 2600.0000
CPU min MHz: 1500.0000
BogoMIPS: 5190.36
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 32768K
NUMA node0 CPU(s): 0-7,64-71
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core)  
Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: May-2022

Hardware Availability: Aug-2021

Software Availability: Dec-2021

### Platform Notes (Continued)

```

NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 257857 MB
node 0 free: 257427 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 258042 MB
node 1 free: 257612 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 258042 MB
node 2 free: 257598 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 257997 MB
node 3 free: 257597 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 258042 MB
node 4 free: 257674 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 258042 MB
node 5 free: 257681 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 258042 MB
node 6 free: 257682 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** May-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

### Platform Notes (Continued)

```

node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 258042 MB
node 7 free: 257677 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 12 12 12 32 32 32 32
 1:  12 10 12 12 32 32 32 32
 2:  12 12 10 12 32 32 32 32
 3:  12 12 12 10 32 32 32 32
 4:  32 32 32 32 10 12 12 12
 5:  32 32 32 32 12 10 12 12
 6:  32 32 32 32 12 12 10 12
 7:  32 32 32 32 12 12 12 10

```

From /proc/meminfo

```

MemTotal:      2113649624 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"

```

uname -a:

```

Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Cisco Systems**  
Cisco UCS C225 M6 (AMD EPYC 7513 32-core)  
Processor)

**SPECrate®2017\_fp\_base = 443**  
**SPECrate®2017\_fp\_peak = 473**

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** May-2022  
**Hardware Availability:** Aug-2021  
**Software Availability:** Dec-2021

## Platform Notes (Continued)

```

barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline,
IBPB: conditional, IBRS_FW, STIBP:
always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Apr 17 06:12

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   223G  9.3G  214G   5% /

From /sys/devices/virtual/dmi/id
Vendor:          Cisco Systems Inc
Product:         UCSC-C225-M6S
Serial:         WZP252408JE

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
 16x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200
 16x Unknown Unknown

BIOS:
BIOS Vendor:     Cisco Systems, Inc.
BIOS Version:    C225M6.4.2.1.30.0221222139
BIOS Date:       02/21/2022
BIOS Revision:   5.22

(End of data from sysinfo program)

```

## Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
=====

```

```

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** May-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

### Compiler Version Notes (Continued)

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Cisco Systems**  
Cisco UCS C225 M6 (AMD EPYC 7513 32-core Processor)

**SPECrate®2017\_fp\_base = 443**  
**SPECrate®2017\_fp\_peak = 473**

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** May-2022  
**Hardware Availability:** Aug-2021  
**Software Availability:** Dec-2021

## Compiler Version Notes (Continued)

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using both C and C++:  
clang++ clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core)  
Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** May-2022  
**Hardware Availability:** Aug-2021  
**Software Availability:** Dec-2021

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

### C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core)  
Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** May-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Base Optimization Flags (Continued)

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -Hz,1,0x1 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loop-fusion
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang

```

Benchmarks using both Fortran and C:

```

-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang

```

Benchmarks using both C and C++:

```

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core) Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** May-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -z muldefs -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** May-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core)  
Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** May-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Peak Optimization Flags (Continued)

519.lbm\_r (continued):

```
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick\_r: Same as 519.lbm\_r

544.nab\_r: basepeak = yes

C++ benchmarks:

```
508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7513 32-core)  
Processor)

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** May-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Peak Optimization Flags (Continued)

503.bwaves\_r (continued):

```
-lamdlibm -ljemalloc -lflang
```

549.fotonik3d\_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
```

```
-Wl,-mllvm -Wl,-function-specialize
```

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
```

```
-march=znver3 -fveclib=AMDLIBM -ffast-math -Kieee
```

```
-Mrecursive -mllvm -reduce-array-computations=3
```

```
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
```

```
-lamdlibm -ljemalloc -lflang
```

554.roms\_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
```

```
-Wl,-mllvm -Wl,-function-specialize
```

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
```

```
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
```

```
-mllvm -reduce-array-computations=3
```

```
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
```

```
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
```

```
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
```

```
-Wl,-mllvm -Wl,-function-specialize
```

```
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
```

```
-march=znver3 -fveclib=AMDLIBM -ffast-math
```

```
-fstruct-layout=7 -mllvm -unroll-threshold=50
```

```
-fremap-arrays -flv-function-specialization
```

```
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
```

```
-mllvm -global-vectorize-slp=true
```

```
-mllvm -function-specialize -mllvm -enable-licm-vrp
```

```
-mllvm -reduce-array-computations=3 -O3 -funroll-loops
```

```
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
```

```
-Mrecursive -Hz,1,0x1 -mllvm -enable-loopinterchange
```

```
-mllvm -compute-interchange-order -lamdlibm -ljemalloc
```

```
-lflang
```

Benchmarks using both C and C++:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Cisco Systems**  
Cisco UCS C225 M6 (AMD EPYC 7513 32-core Processor)

SPECrate®2017\_fp\_base = 443  
SPECrate®2017\_fp\_peak = 473

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** May-2022  
**Hardware Availability:** Aug-2021  
**Software Availability:** Dec-2021

## Peak Optimization Flags (Continued)

511.povray\_r: basepeak = yes

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-05-10 18:10:17-0400.

Report generated on 2022-08-02 17:45:42 by CPU2017 PDF formatter v6442.

Originally published on 2022-08-02.