



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 443

### Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jul-2022

Hardware Availability: Apr-2021

Software Availability: Sep-2021

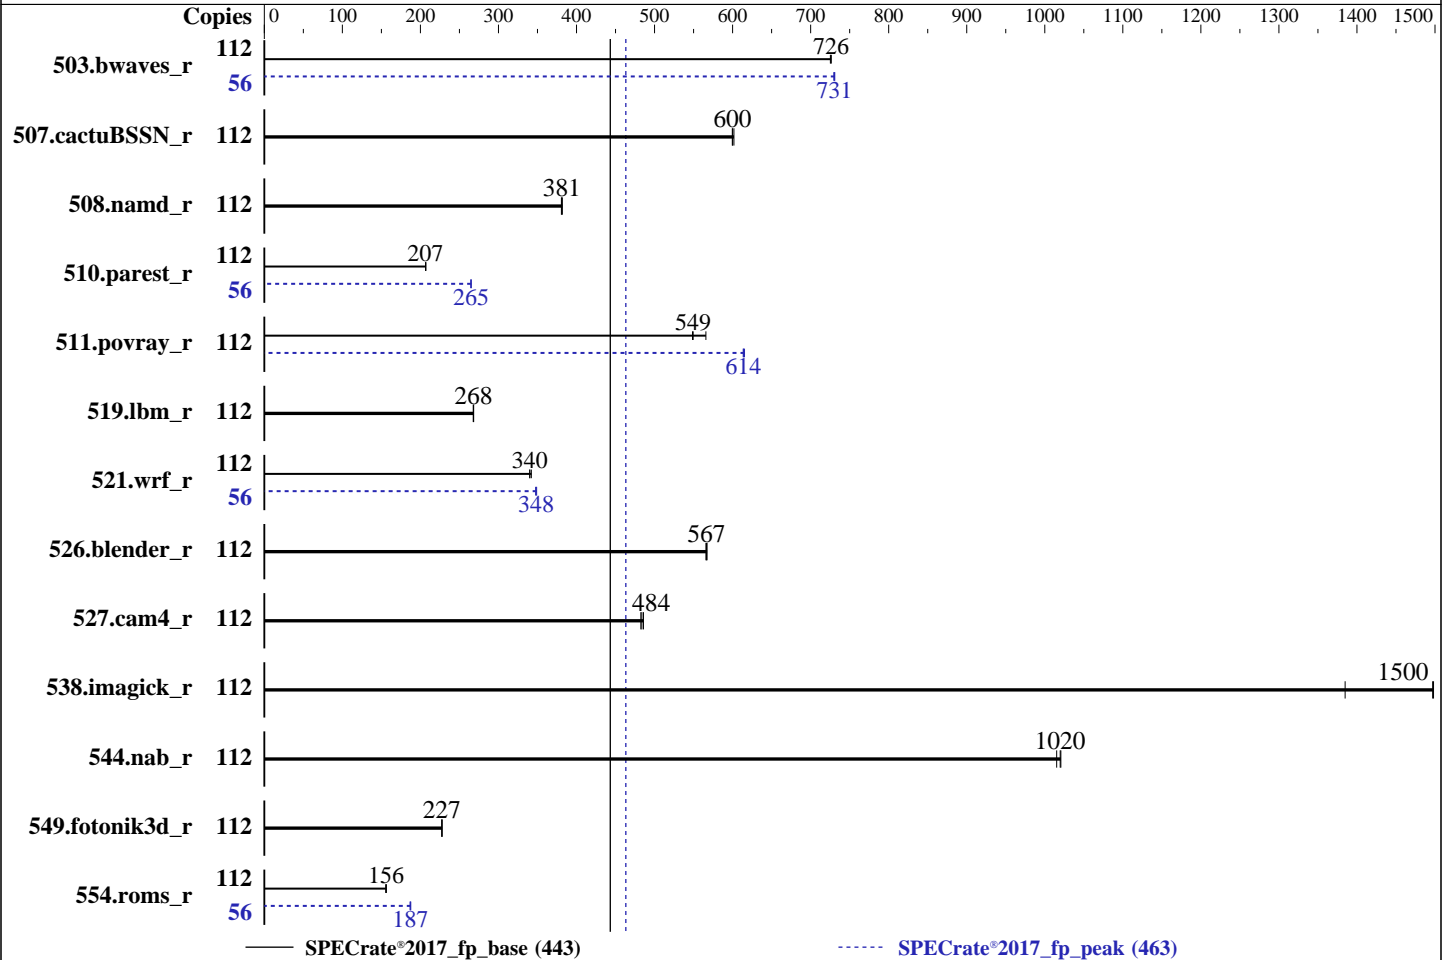

### Hardware

CPU Name: Intel Xeon Gold 6348  
 Max MHz: 3500  
 Nominal: 2600  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 42 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)  
 Storage: 1 x 2 TB NVME SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86\_64  
 Compiler: C/C++: Version 2021.4.0 of Intel oneAPI DPC++/C++ Compiler Build 20210924 for Linux;  
 Fortran: Version 2021.4.0 of Intel Fortran Compiler Classic Build 20210910 for Linux;  
 C/C++: Version 2021.4.0 of Intel C/C++ Compiler Classic Build 20210910 for Linux;  
 Parallel: No  
 Firmware: Version 04.12.02 released Apr-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 443

## Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

CPU2017 License: 3358  
Test Sponsor: Inspur Corporation  
Tested by: Inspur Corporation

Test Date: Jul-2022  
Hardware Availability: Apr-2021  
Software Availability: Sep-2021

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	1547	726	<u>1547</u>	<u>726</u>	1549	725	56	770	730	768	731	<u>769</u>	<u>731</u>
507.cactuBSSN_r	112	236	600	<u>236</u>	<u>600</u>	236	602	112	236	600	<u>236</u>	<u>600</u>	236	602
508.namd_r	112	280	381	<u>279</u>	<u>381</u>	279	382	112	280	381	<u>279</u>	<u>381</u>	279	382
510.parest_r	112	1416	207	<u>1418</u>	<u>207</u>	1418	207	56	554	265	<u>553</u>	<u>265</u>	553	265
511.povray_r	112	<u>476</u>	<u>549</u>	462	566	477	549	112	426	614	425	615	<u>426</u>	<u>614</u>
519.lbm_r	112	441	268	440	268	<u>440</u>	<u>268</u>	112	441	268	440	268	<u>440</u>	<u>268</u>
521.wrf_r	112	738	340	<u>737</u>	<u>340</u>	733	342	56	360	349	361	348	<u>360</u>	<u>348</u>
526.blender_r	112	301	567	301	566	<u>301</u>	<u>567</u>	112	301	567	301	566	<u>301</u>	<u>567</u>
527.cam4_r	112	406	482	403	486	<u>405</u>	<u>484</u>	112	406	482	403	486	<u>405</u>	<u>484</u>
538.imagick_r	112	201	1380	<u>186</u>	<u>1500</u>	186	1500	112	201	1380	<u>186</u>	<u>1500</u>	186	1500
544.nab_r	112	<u>185</u>	<u>1020</u>	185	1020	186	1020	112	<u>185</u>	<u>1020</u>	185	1020	186	1020
549.fotonik3d_r	112	1916	228	<u>1919</u>	<u>227</u>	1919	227	112	1916	228	<u>1919</u>	<u>227</u>	1919	227
554.roms_r	112	1143	156	1139	156	<u>1141</u>	<u>156</u>	56	476	187	<u>476</u>	<u>187</u>	474	188

SPECrate®2017\_fp\_base = 443

SPECrate®2017\_fp\_peak = 463

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 443

Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** Sep-2021

## General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5,  
and the system compiler gcc 4.8.5;  
sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS and OS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
Sub NUMA Cluster (SNC) set to Enable  
Scaling\_Governor set to Performance

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Thu Jul 14 05:49:43 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6348 CPU @ 2.60GHz
 2 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 56
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27
```

From lscpu from util-linux 2.32.1:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 443

## Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** Sep-2021

### Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                112
On-line CPU(s) list:  0-111
Thread(s) per core:    2
Core(s) per socket:    28
Socket(s):             2
NUMA node(s):         8
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 106
Model name:            Intel(R) Xeon(R) Gold 6348 CPU @ 2.60GHz
Stepping:              6
CPU MHz:               3400.000
CPU max MHz:           3500.0000
CPU min MHz:           800.0000
BogoMIPS:              5200.00
Virtualization:        VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              43008K
NUMA node0 CPU(s):    0-6,56-62
NUMA node1 CPU(s):    7-13,63-69
NUMA node2 CPU(s):    14-20,70-76
NUMA node3 CPU(s):    21-27,77-83
NUMA node4 CPU(s):    28-34,84-90
NUMA node5 CPU(s):    35-41,91-97
NUMA node6 CPU(s):    42-48,98-104
NUMA node7 CPU(s):    49-55,105-111
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 43008 KB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 443

Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

CPU2017 License: 3358  
Test Sponsor: Inspur Corporation  
Tested by: Inspur Corporation

Test Date: Jul-2022  
Hardware Availability: Apr-2021  
Software Availability: Sep-2021

## Platform Notes (Continued)

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 56 57 58 59 60 61 62
node 0 size: 127944 MB
node 0 free: 120989 MB
node 1 cpus: 7 8 9 10 11 12 13 63 64 65 66 67 68 69
node 1 size: 127476 MB
node 1 free: 122851 MB
node 2 cpus: 14 15 16 17 18 19 20 70 71 72 73 74 75 76
node 2 size: 127918 MB
node 2 free: 123336 MB
node 3 cpus: 21 22 23 24 25 26 27 77 78 79 80 81 82 83
node 3 size: 127728 MB
node 3 free: 123306 MB
node 4 cpus: 28 29 30 31 32 33 34 84 85 86 87 88 89 90
node 4 size: 127750 MB
node 4 free: 123312 MB
node 5 cpus: 35 36 37 38 39 40 41 91 92 93 94 95 96 97
node 5 size: 127856 MB
node 5 free: 123258 MB
node 6 cpus: 42 43 44 45 46 47 48 98 99 100 101 102 103 104
node 6 size: 127816 MB
node 6 free: 123335 MB
node 7 cpus: 49 50 51 52 53 54 55 105 106 107 108 109 110 111
node 7 size: 127782 MB
node 7 free: 123316 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10  20  20  20  20  20  20  20
 1:  20  10  20  20  20  20  20  20
 2:  20  20  10  20  20  20  20  20
 3:  20  20  20  10  20  20  20  20
 4:  20  20  20  20  10  20  20  20
 5:  20  20  20  20  20  10  20  20
 6:  20  20  20  20  20  20  10  20
 7:  20  20  20  20  20  20  20  10

```

```

From /proc/meminfo
MemTotal: 1056481104 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 443

## Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** Sep-2021

### Platform Notes (Continued)

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*  
os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jul 13 23:10

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.4T	104G	1.3T	8%	/home

From /sys/devices/virtual/dmi/id

Vendor: Inspur  
Product: NF5280M6

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 443

Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

CPU2017 License: 3358  
Test Sponsor: Inspur Corporation  
Tested by: Inspur Corporation

Test Date: Jul-2022  
Hardware Availability: Apr-2021  
Software Availability: Sep-2021

## Platform Notes (Continued)

Product Family: Family  
Serial: 380251214

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
32x Micron 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200

BIOS:  
BIOS Vendor: American Megatrends Inc.  
BIOS Version: 04.12.02  
BIOS Date: 04/02/2021  
BIOS Revision: 5.21

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
544.nab\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.4.0 Build 20210924  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.4.0 Build 20210924  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.4.0 Build 20210910\_000000  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.4.0 Build 20210910\_000000  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 443

### Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** Sep-2021

### Compiler Version Notes (Continued)

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.4.0 Build 20210924  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.4.0 Build 20210924  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.4.0 Build 20210910\_000000  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.4.0 Build 20210910\_000000  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.4.0 Build 20210924  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.4.0 Build 20210924  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.4.0 Build 20210924  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.4.0 Build 20210924  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.4.0 Build 20210910\_000000  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 443

### Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Jul-2022

**Hardware Availability:** Apr-2021

**Software Availability:** Sep-2021

## Compiler Version Notes (Continued)

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 443

Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jul-2022

Hardware Availability: Apr-2021

Software Availability: Sep-2021

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.4.0 Build 20210910\_000000  
 Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
 Version 2021.4.0 Build 20210924  
 Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
 507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64  
 510.parest\_r: -DSPEC\_LP64  
 511.povray\_r: -DSPEC\_LP64  
 519.lbm\_r: -DSPEC\_LP64  
 521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
 526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
 527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
 538.imagick\_r: -DSPEC\_LP64  
 544.nab\_r: -DSPEC\_LP64  
 549.fotonik3d\_r: -DSPEC\_LP64  
 554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 443

Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jul-2022

Hardware Availability: Apr-2021

Software Availability: Sep-2021

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nonstandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nonstandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nonstandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 443

Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jul-2022

Hardware Availability: Apr-2021

Software Availability: Sep-2021

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

521.wrf\_r: ifort icc

527.cam4\_r: ifort icx

Benchmarks using both C and C++:

511.povray\_r: icpc icc

526.blender\_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 443

Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jul-2022

Hardware Availability: Apr-2021

Software Availability: Sep-2021

## Peak Optimization Flags (Continued)

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 443

Inspur NF5280M6 (Intel Xeon Gold 6348)

SPECrate®2017\_fp\_peak = 463

**CPU2017 License:** 3358

**Test Date:** Jul-2022

**Test Sponsor:** Inspur Corporation

**Hardware Availability:** Apr-2021

**Tested by:** Inspur Corporation

**Software Availability:** Sep-2021

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-07-14 05:49:43-0400.

Report generated on 2022-08-03 10:46:55 by CPU2017 PDF formatter v6442.

Originally published on 2022-08-03.