



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X, 3.8GHz

SPECSpeed®2017_int_base = 15.0

SPECSpeed®2017_int_peak = 15.3

CPU2017 License: 5416


Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

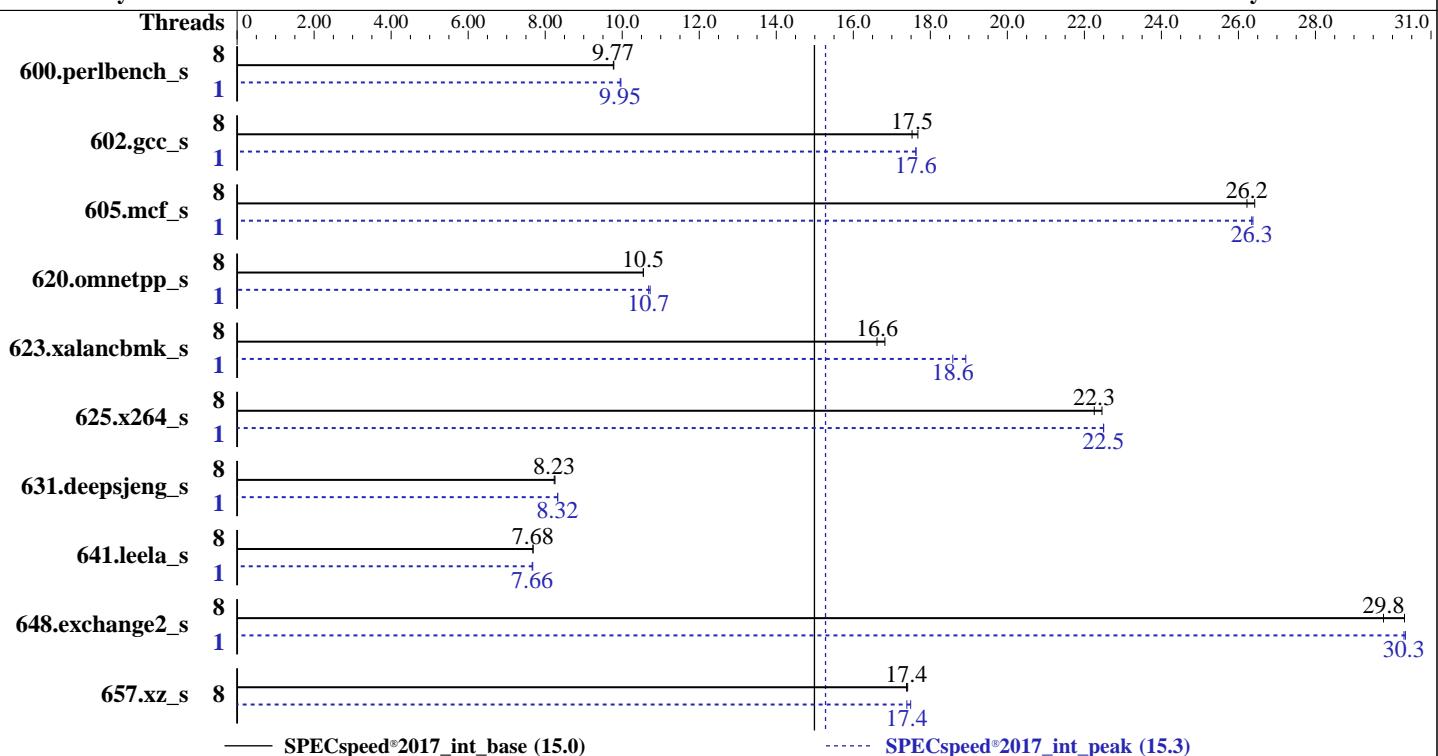

Hardware		Software	
CPU Name:	AMD Ryzen 7 5800X	OS:	Ubuntu 20.04.2 LTS
Max MHz:	4700		kernel version
Nominal:	3800		5.4.0-122-generic
Enabled:	8 cores, 1 chip, 2 threads/core	Compiler:	C/C++/Fortran: Version 3.2.0 of AOCC
Orderable:	1 chip	Parallel:	Yes
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	BIOS version L1.05b released Jan-2022
L2:	512 KB I+D on chip per core	File System:	ext4
L3:	32 MB I+D on chip per 8 cores	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	64 GB (2 x 32 GB 2Rx8 PC4-3200AA-E)	Peak Pointers:	64-bit
Storage:	Micron 7400 PRO 960GB NVMe M.2	Other:	jemalloc: jemalloc memory allocator library v5.1.0
Other:	None	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X, 3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	8	181	9.78	<u>182</u>	<u>9.77</u>			1	178	9.97	<u>178</u>	<u>9.95</u>		
602.gcc_s	8	225	17.7	<u>227</u>	<u>17.5</u>			1	<u>226</u>	<u>17.6</u>	226	17.6		
605.mcf_s	8	<u>180</u>	<u>26.2</u>	179	26.4			1	<u>179</u>	<u>26.4</u>	<u>179</u>	<u>26.3</u>		
620.omnetpp_s	8	<u>155</u>	<u>10.5</u>	155	10.5			1	<u>152</u>	<u>10.7</u>	<u>153</u>	<u>10.7</u>		
623.xalancbmk_s	8	84.2	16.8	<u>85.3</u>	<u>16.6</u>			1	74.9	18.9	<u>76.2</u>	<u>18.6</u>		
625.x264_s	8	<u>79.3</u>	<u>22.3</u>	78.6	22.5			1	<u>78.4</u>	<u>22.5</u>	78.4	22.5		
631.deepsjeng_s	8	174	8.25	<u>174</u>	<u>8.23</u>			1	<u>172</u>	<u>8.32</u>	172	8.33		
641.leela_s	8	222	7.68	<u>222</u>	<u>7.68</u>			1	<u>223</u>	<u>7.66</u>	222	7.68		
648.exchange2_s	8	<u>98.8</u>	<u>29.8</u>	97.0	30.3			1	96.9	30.3	<u>97.0</u>	<u>30.3</u>		
657.xz_s	8	355	17.4	<u>356</u>	<u>17.4</u>			8	353	17.5	<u>355</u>	<u>17.4</u>		
SPECspeed®2017_int_base = 15.0														
SPECspeed®2017_int_peak = 15.3														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X, 3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-15"  
LD_LIBRARY_PATH =  
    "/home/asrr/speed/amd_speed_aocc320_milanx_A/lib/lib;/home/asrr/speed/am  
    d_speed_aocc320_milanx_A/lib/lib32:"  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "16"
```

Environment variables set by runcpu during the 600.perlbench_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 602.gcc_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 620.omnetpp_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 648.exchange2_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz_s peak run:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X, 3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

Environment Variables Notes (Continued)

GOMP_CPU_AFFINITY = "0-7"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings :

Precision Boost Overdrive	:	Enabled
IOMMU	:	Disabled
Core Performance Boost	:	Enabled
Global C-state Control	:	Disabled
Memory interleaving	:	Enabled

Sysinfo program /home/asrr/speed/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on asrr Sun Jul 17 01:01:25 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD Ryzen 7 5800X 8-Core Processor

1 "physical id"s (chips)
16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X, 3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

From lscpu from util-linux 2.34:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
Address sizes:	48 bits physical, 48 bits virtual
CPU(s):	16
On-line CPU(s) list:	0-15
Thread(s) per core:	2
Core(s) per socket:	8
Socket(s):	1
NUMA node(s):	1
Vendor ID:	AuthenticAMD
CPU family:	25
Model:	33
Model name:	AMD Ryzen 7 5800X 8-Core Processor
Stepping:	2
Frequency boost:	enabled
CPU MHz:	4502.692
CPU max MHz:	3800.0000
CPU min MHz:	2200.0000
BogoMIPS:	7600.23
Virtualization:	AMD-V
L1d cache:	256 KiB
L1i cache:	256 KiB
L2 cache:	4 MiB
L3 cache:	32 MiB
NUMA node0 CPU(s):	0-15
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf perf_pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X, 3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

```
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba ibrs ibpb stibp vmmcall
fsgsbase bmil avx2 smep bmi2 erms invpcid cqmq rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrrip_save
tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmlload vgif umip pkup ospke vaes vpclmulqdq rdpid overflow_recov succor smca
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	256K	8	Data	1
L1i	32K	256K	8	Instruction	1
L2	512K	4M	8	Unified	2
L3	32M	32M	16	Unified	3

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 64304 MB
node 0 free: 63577 MB
node distances:
node 0
0: 10
```

From /proc/meminfo

```
MemTotal:       65848060 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
/usr/bin/lsb_release -d
Ubuntu 20.04.2 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.2 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.2 LTS"
  VERSION_ID="20.04"
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X, 3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"

uname -a:

Linux asrr 5.4.0-122-generic #138-Ubuntu SMP Wed Jun 22 15:00:31 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

SPEC is set to: /home/asrr/speed

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p4	ext4	874G	26G	804G	4%	/

From /sys/devices/virtual/dmi/id

Vendor:	ASRockRack
Product:	1U4LW-X570 RPSU
Serial:	F1S0R8000110

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Kingston 9965745-020.A00G 32 GB 2 rank 3200
2x Unknown Unknown

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	L1.05b

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X, 3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

BIOS Date: 01/17/2022

BIOS Revision: 5.17

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
| peak) 625.x264_s(base, peak) 657.xz_s(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

=====

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

=====

Fortran | 648.exchange2_s(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X,3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

C++ benchmarks:

-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -flv-function-specialization
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X, 3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jul-2022

Hardware Availability: Jul-2022

Software Availability: Jun-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true
-mllvm -convert-pow-exp-to-int=false -z muldefs
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -flang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -ftlo -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -flang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X,3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

602.gcc_s: Same as 600.perlbench_s

605.mcf_s: Same as 600.perlbench_s

```
625.x264_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

657.xz_s: Same as 625.x264_s

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X, 3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

Peak Optimization Flags (Continued)

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

```
631.deepsjeng_s: -m64 -Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -convert-pow-exp-to-int=false
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-X570 RPSU
AMD Ryzen 7 5800X, 3.8GHz

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 5416

Test Date: Jul-2022

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jul-2022

Tested by: ASRock Rack Inc.

Software Availability: Jun-2022

Peak Optimization Flags (Continued)

631.deepsjeng_s (continued):

-lflang

641.leela_s: Same as 620.omnetpp_s

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lso-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -ftz -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp=libomp -lomp
-lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.2022-09-14.html>

http://www.spec.org/cpu2017/flags/ASRockRack_Platform-Settings-AMD-AM4-V1.1.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.2022-09-14.xml>

http://www.spec.org/cpu2017/flags/ASRockRack_Platform-Settings-AMD-AM4-V1.1.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-07-16 21:01:25-0400.

Report generated on 2022-09-14 10:43:11 by CPU2017 PDF formatter v6442.

Originally published on 2022-09-13.