



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation


SPECrate®2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = 439

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Sep-2021

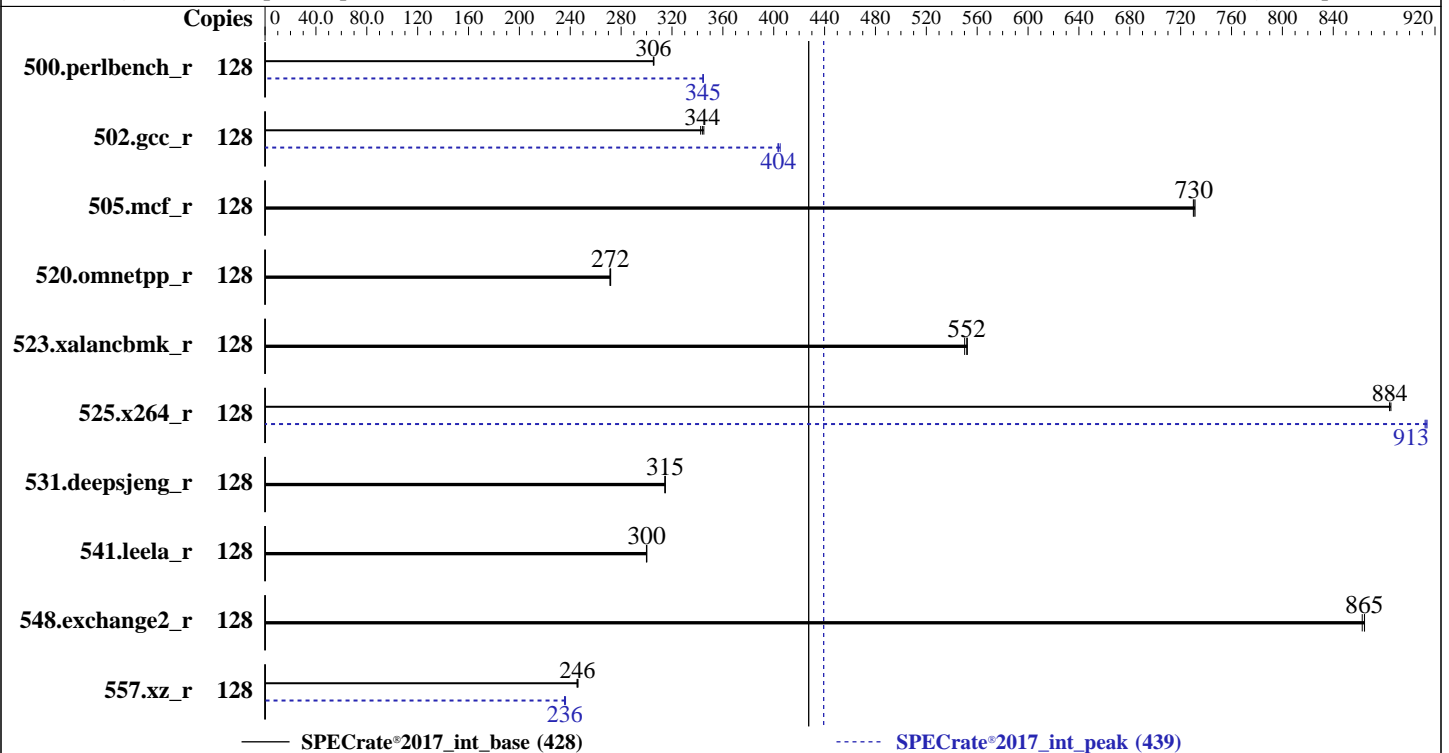

Hardware

CPU Name: Intel Xeon Gold 6338
Max MHz: 3200
Nominal: 2000
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 48 MB I+D on chip per chip
Other: None
Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)
Storage: 1 x 2 TB NVME SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa)
4.18.0-240.el8.x86_64
Compiler: C/C++: Version 2021.4.0 of Intel oneAPI DPC++/C++
Compiler Build 20210924 for Linux;
Fortran: Version 2021.4.0 of Intel Fortran
Compiler Classic Build 20210910 for Linux;
C/C++: Version 2021.4.0 of Intel C/C++
Compiler Classic Build 20210910 for Linux;
Parallel: No
Firmware: Version 04.12.02 released Apr-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = 439

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Sep-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	666	306	667	306	667	305	128	591	345	591	345	592	344
502.gcc_r	128	525	345	527	344	529	343	128	449	403	447	405	449	404
505.mcf_r	128	283	730	283	730	283	731	128	283	730	283	730	283	731
520.omnetpp_r	128	619	271	618	272	618	272	128	619	271	618	272	618	272
523.xalancbmk_r	128	245	552	245	552	246	550	128	245	552	245	552	246	550
525.x264_r	128	253	884	253	884	253	885	128	246	912	245	913	245	914
531.deepsjeng_r	128	466	315	466	314	466	315	128	466	315	466	314	466	315
541.leela_r	128	706	300	707	300	706	300	128	706	300	707	300	706	300
548.exchange2_r	128	388	865	389	863	388	865	128	388	865	389	863	388	865
557.xz_r	128	563	246	563	245	562	246	128	586	236	587	235	585	236

SPECrate®2017_int_base = 428

SPECrate®2017_int_peak = 439

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Scaling_Governor set to Performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOCONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = 439

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Sep-2021

General Notes (Continued)

Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to Enable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Sun Jul 24 23:39:46 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = 439

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Sep-2021

Platform Notes (Continued)

```

From lscpu from util-linux 2.32.1:
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               128
On-line CPU(s) list:  0-127
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):            2
NUMA node(s):        8
Vendor ID:            GenuineIntel
CPU family:           6
Model:               106
Model name:           Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
Stepping:            6
CPU MHz:              2600.000
CPU max MHz:          3200.0000
CPU min MHz:          800.0000
BogoMIPS:             4000.00
Virtualization:       VT-x
L1d cache:           48K
L1i cache:           32K
L2 cache:            1280K
L3 cache:            49152K
NUMA node0 CPU(s):   0-7,64-71
NUMA node1 CPU(s):   8-15,72-79
NUMA node2 CPU(s):   16-23,80-87
NUMA node3 CPU(s):   24-31,88-95
NUMA node4 CPU(s):   32-39,96-103
NUMA node5 CPU(s):   40-47,104-111
NUMA node6 CPU(s):   48-55,112-119
NUMA node7 CPU(s):   56-63,120-127
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = 439

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Sep-2021

Platform Notes (Continued)

cache size : 49152 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71

node 0 size: 127543 MB

node 0 free: 128807 MB

node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79

node 1 size: 127265 MB

node 1 free: 128426 MB

node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87

node 2 size: 127622 MB

node 2 free: 128876 MB

node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95

node 3 size: 127464 MB

node 3 free: 128814 MB

node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103

node 4 size: 127446 MB

node 4 free: 128801 MB

node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111

node 5 size: 127504 MB

node 5 free: 128817 MB

node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119

node 6 size: 127578 MB

node 6 free: 128862 MB

node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127

node 7 size: 127539 MB

node 7 free: 128866 MB

node distances:

node 0 1 2 3 4 5 6 7

0: 10 20 20 20 20 20 20 20

1: 20 10 20 20 20 20 20 20

2: 20 20 10 20 20 20 20 20

3: 20 20 20 10 20 20 20 20

4: 20 20 20 20 10 20 20 20

5: 20 20 20 20 20 10 20 20

6: 20 20 20 20 20 20 10 20

7: 20 20 20 20 20 20 20 10

From /proc/meminfo

MemTotal: 1056477640 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = 439

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Sep-2021

Platform Notes (Continued)

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
```

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:

```
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jul 24 23:39

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.4T	105G	1.3T	8%	/home

From /sys/devices/virtual/dmi/id
Vendor: Inspur

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = 439

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Sep-2021

Platform Notes (Continued)

Product: NF5466M6
Product Family: Family
Serial: 380983478

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
32x Micron 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200

BIOS:
BIOS Vendor: American Megatrends Inc.
BIOS Version: 04.12.02
BIOS Date: 04/02/2021
BIOS Revision: 5.21

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = 439

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Sep-2021

Compiler Version Notes (Continued)

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.4.0 Build 20210924

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = 439

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jul-2022

Hardware Availability: Apr-2021

Software Availability: Sep-2021

Compiler Version Notes (Continued)

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

```

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.4.0 Build 20210924

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

```

=====
Fortran  | 548.exchange2_r(base, peak)
=====

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.4.0 Build 20210910_000000

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU[®]2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate[®]2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate[®]2017_int_peak = 439

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jul-2022

Hardware Availability: Apr-2021

Software Availability: Sep-2021

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench_r: icc

557.xz_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = 439

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jul-2022

Hardware Availability: Apr-2021

Software Availability: Sep-2021

Peak Portability Flags (Continued)

```
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 428

Inspur NF5466M6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = 439

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jul-2022

Hardware Availability: Apr-2021

Software Availability: Sep-2021

Peak Optimization Flags (Continued)

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-07-24 23:39:45-0400.

Report generated on 2022-08-16 13:56:46 by CPU2017 PDF formatter v6442.

Originally published on 2022-08-16.