



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro


A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Aug-2022  
Hardware Availability: Sep-2019  
Software Availability: Dec-2021

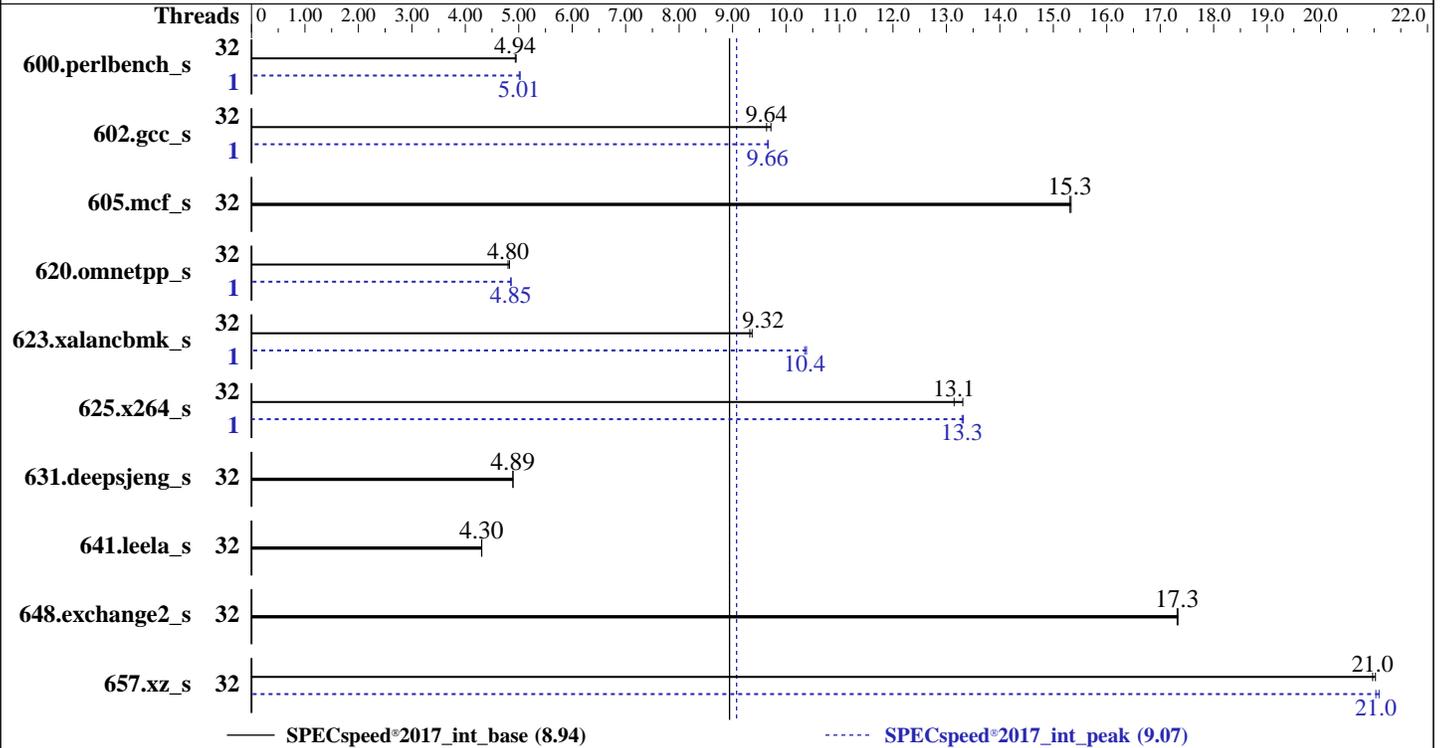

### Hardware

CPU Name: AMD EPYC 7302  
Max MHz: 3300  
Nominal: 3000  
Enabled: 32 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 128 MB I+D on chip per chip, 16 MB shared / 2 cores  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 200 GB SATA III SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP3  
Kernel 5.3.18-57-default  
Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
Parallel: Yes  
Firmware: Version 2.4 released Apr-2022  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc: jemalloc memory allocator library v5.1.0  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Aug-2022  
Hardware Availability: Sep-2019  
Software Availability: Dec-2021

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	<b>360</b>	<b>4.94</b>	359	4.95			1	<b>354</b>	<b>5.01</b>	353	5.03		
602.gcc_s	32	410	9.72	<b>413</b>	<b>9.64</b>			1	<b>412</b>	<b>9.66</b>	412	9.66		
605.mcf_s	32	308	15.3	<b>308</b>	<b>15.3</b>			32	308	15.3	<b>308</b>	<b>15.3</b>		
620.omnetpp_s	32	<b>340</b>	<b>4.80</b>	338	4.83			1	336	4.86	<b>336</b>	<b>4.85</b>		
623.xalancbmk_s	32	151	9.37	<b>152</b>	<b>9.32</b>			1	136	10.4	<b>137</b>	<b>10.4</b>		
625.x264_s	32	133	13.3	<b>134</b>	<b>13.1</b>			1	<b>133</b>	<b>13.3</b>	132	13.3		
631.deepsjeng_s	32	<b>293</b>	<b>4.89</b>	293	4.89			32	<b>293</b>	<b>4.89</b>	293	4.89		
641.leela_s	32	396	4.31	<b>396</b>	<b>4.30</b>			32	396	4.31	<b>396</b>	<b>4.30</b>		
648.exchange2_s	32	<b>170</b>	<b>17.3</b>	170	17.3			32	<b>170</b>	<b>17.3</b>	170	17.3		
657.xz_s	32	<b>295</b>	<b>21.0</b>	294	21.0			32	<b>294</b>	<b>21.0</b>	293	21.1		

SPECspeed®2017\_int\_base = **8.94**

SPECspeed®2017\_int\_peak = **9.07**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

### Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-63"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/amd\_speed\_aocc320\_milanx\_A\_lib/lib;/home/cpu2017/amd\_speed\_aocc320\_milanx\_A\_lib/lib32:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 600.perlbench\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalanbmk\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

### Platform Notes

BIOS Settings:

Determinism Control = Manual  
Determinism Slider = Power  
cTDP Control = Manual  
cTDP = 180  
Package Power Limit Control = Manual  
Package Power Limit = 180  
APBDIS = 1  
NUMA Nodes Per Socket = NPS4

sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on 135-172-129 Fri Aug 5 16:56:14 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7302 16-Core Processor
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
```

From lscpu from util-linux 2.36.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 43 bits physical, 48 bits virtual
CPU(s): 64
On-line CPU(s) list: 0-63
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

### Platform Notes (Continued)

```

Thread(s) per core:                2
Core(s) per socket:                16
Socket(s):                          2
NUMA node(s):                      16
Vendor ID:                          AuthenticAMD
CPU family:                          23
Model:                               49
Model name:                          AMD EPYC 7302 16-Core Processor
Stepping:                            0
Frequency boost:                     enabled
CPU MHz:                             1656.955
CPU max MHz:                         3000.0000
CPU min MHz:                         1500.0000
BogoMIPS:                            5999.93
Virtualization:                      AMD-V
L1d cache:                           1 MiB
L1i cache:                           1 MiB
L2 cache:                             16 MiB
L3 cache:                             256 MiB
NUMA node0 CPU(s):                   0,1,32,33
NUMA node1 CPU(s):                   2,3,34,35
NUMA node2 CPU(s):                   4,5,36,37
NUMA node3 CPU(s):                   6,7,38,39
NUMA node4 CPU(s):                   8,9,40,41
NUMA node5 CPU(s):                   10,11,42,43
NUMA node6 CPU(s):                   12,13,44,45
NUMA node7 CPU(s):                   14,15,46,47
NUMA node8 CPU(s):                   16,17,48,49
NUMA node9 CPU(s):                   18,19,50,51
NUMA node10 CPU(s):                  20,21,52,53
NUMA node11 CPU(s):                  22,23,54,55
NUMA node12 CPU(s):                  24,25,56,57
NUMA node13 CPU(s):                  26,27,58,59
NUMA node14 CPU(s):                  28,29,60,61
NUMA node15 CPU(s):                  30,31,62,63
Vulnerability Itlb multihit:         Not affected
Vulnerability L1tf:                   Not affected
Vulnerability Mds:                    Not affected
Vulnerability Meltdown:               Not affected
Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:              Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:              Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP conditional, RSB filling
Vulnerability Srbds:                   Not affected
Vulnerability Tsx async abort:         Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

### Platform Notes (Continued)

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good nopl nonstop\_tsc cpuid extd\_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 sse4\_1 sse4\_2 movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_llc mwaitx cpb cat\_l3 cdp\_l3 hw\_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall sev\_es fsgsbase bmi1 avx2 smep bmi2 cqm rdt\_a rdseed adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local clzero irperf xsaveerptr wbnoinvd amd\_ppin arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic v\_vmsave\_vmload vgif umip rdpid overflow\_recov succor smca

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	512K	16M	8	Unified	2	1024	1	64
L3	16M	256M	16	Unified	3	16384	1	64

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 32 33
node 0 size: 64319 MB
node 0 free: 64138 MB
node 1 cpus: 2 3 34 35
node 1 size: 64475 MB
node 1 free: 64201 MB
node 2 cpus: 4 5 36 37
node 2 size: 64510 MB
node 2 free: 64386 MB
node 3 cpus: 6 7 38 39
node 3 size: 64509 MB
node 3 free: 64331 MB
node 4 cpus: 8 9 40 41
node 4 size: 64510 MB
node 4 free: 64383 MB
node 5 cpus: 10 11 42 43
node 5 size: 64509 MB
node 5 free: 64391 MB
node 6 cpus: 12 13 44 45
node 6 size: 64510 MB
node 6 free: 64392 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

### Platform Notes (Continued)

```

node 7 cpus: 14 15 46 47
node 7 size: 64497 MB
node 7 free: 64378 MB
node 8 cpus: 16 17 48 49
node 8 size: 64510 MB
node 8 free: 64199 MB
node 9 cpus: 18 19 50 51
node 9 size: 64509 MB
node 9 free: 64361 MB
node 10 cpus: 20 21 52 53
node 10 size: 64510 MB
node 10 free: 64388 MB
node 11 cpus: 22 23 54 55
node 11 size: 64509 MB
node 11 free: 64382 MB
node 12 cpus: 24 25 56 57
node 12 size: 64510 MB
node 12 free: 64382 MB
node 13 cpus: 26 27 58 59
node 13 size: 64509 MB
node 13 free: 64391 MB
node 14 cpus: 28 29 60 61
node 14 size: 64510 MB
node 14 free: 64383 MB
node 15 cpus: 30 31 62 63
node 15 size: 64509 MB
node 15 free: 64379 MB

```

node distances:

```

node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0:  10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 1:  11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 2:  12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
 3:  12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
 4:  12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
 5:  12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
 6:  12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
 7:  12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32
 8:  32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
 9:  32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12
10:  32 32 32 32 32 32 32 32 12 12 10 11 12 12 12 12
11:  32 32 32 32 32 32 32 32 12 12 11 10 12 12 12 12
12:  32 32 32 32 32 32 32 32 12 12 12 12 10 11 12 12
13:  32 32 32 32 32 32 32 32 12 12 12 12 11 10 12 12
14:  32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11
15:  32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 10

```

From /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

### Platform Notes (Continued)

MemTotal: 1056691736 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15-SP3"
VERSION_ID="15.3"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp3"
```

uname -a:

```
Linux 135-172-129 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Aug 4 23:35

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	144G	3.8G	140G	3%	/home

From /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

### Platform Notes (Continued)

Vendor: Supermicro  
Product: Super Server  
Serial: 0123456789

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x SK Hynix HMAA8GR7AJR4N-XN 64 GB 2 rank 3200

BIOS:  
BIOS Vendor: American Megatrends Inc.  
BIOS Version: 2.4  
BIOS Date: 04/19/2022  
BIOS Revision: 5.14

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak)  
| 625.x264\_s(base, peak) 657.xz\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

### Compiler Version Notes (Continued)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
-----

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

### Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

### Base Optimization Flags

C benchmarks:  
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-inline-aggressive -flv-function-specialization
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true
-mllvm -convert-pow-exp-to-int=false -z muldefs
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

602.gcc\_s: Same as 600.perlbench\_s

605.mcf\_s: basepeak = yes

```
625.x264_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

## Peak Optimization Flags (Continued)

625.x264\_s (continued):

```
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

657.xz\_s: Same as 625.x264\_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7302)

SPECspeed®2017\_int\_base = 8.94

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2022  
**Hardware Availability:** Sep-2019  
**Software Availability:** Dec-2021

## Peak Optimization Flags (Continued)

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revF.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-08-05 04:56:14-0400.  
Report generated on 2022-08-31 20:08:54 by CPU2017 PDF formatter v6442.  
Originally published on 2022-08-30.