



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2

(3.10 GHz, Intel Xeon E-2324G)

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

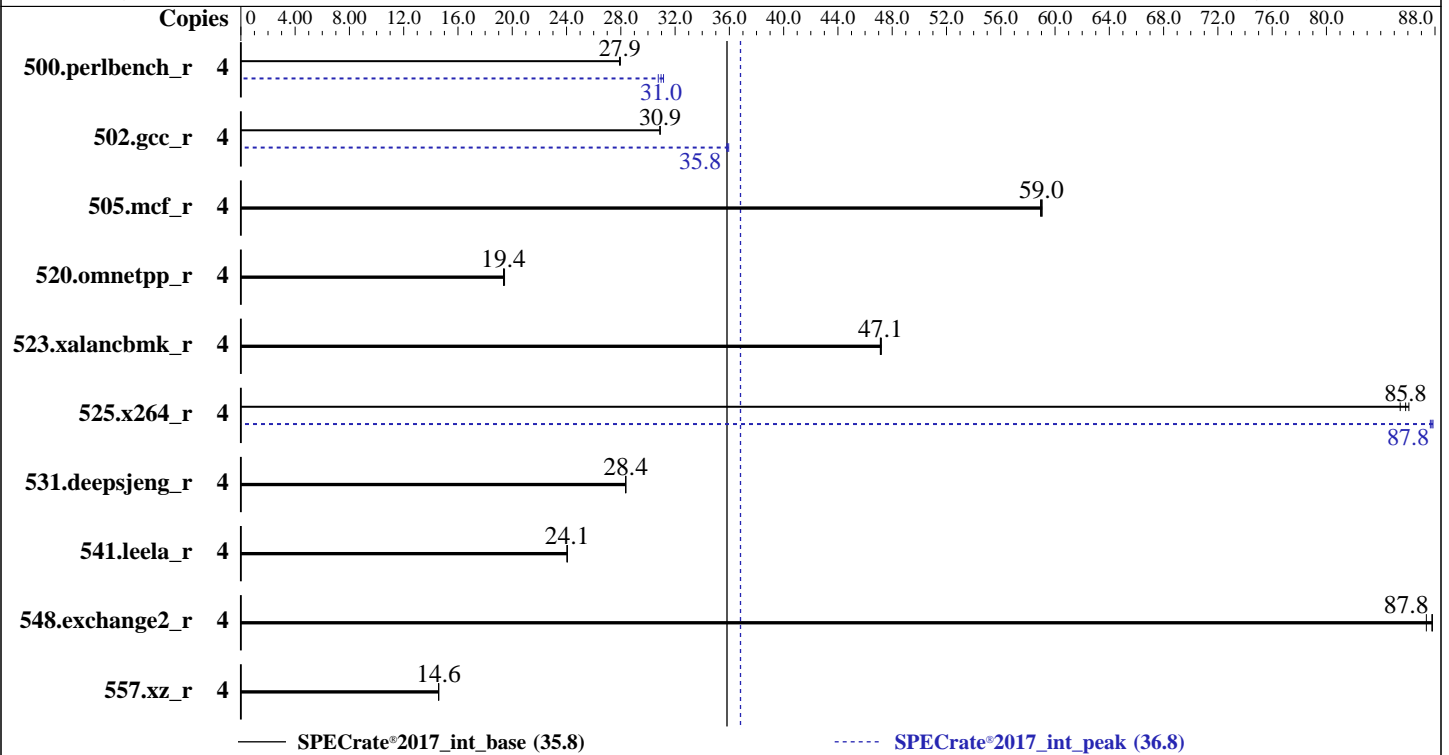

Hardware

CPU Name: Intel Xeon E-2324G
 Max MHz: 4600
 Nominal: 3100
 Enabled: 4 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 8 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx8 PC4-3200AA-E)
 Storage: 2 x 400 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.5 (Ootpa)
 Kernel 4.18.0-348.el8.x86_64
 Compiler: C/C++: Version 2021.4.0 of Intel oneAPI DPC++/C++
 Compiler Build 20210924 for Linux;
 Fortran: Version 2021.4.0 of Intel Fortran Compiler
 Classic Build 20210910 for Linux;
 C/C++: Version 2021.4.0 of Intel C/C++ Compiler Classic Build 20210910 for Linux;
 Parallel: No
 Firmware: HPE BIOS Version U64 v1.60 (06/30/2022) released Jun-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2

(3.10 GHz, Intel Xeon E-2324G)

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2022
Hardware Availability: Sep-2022
Software Availability: Nov-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	4	228	27.9	228	28.0	228	27.9	4	204	31.1	206	31.0	207	30.8
502.gcc_r	4	183	30.9	183	30.9	183	30.9	4	158	36.0	158	35.8	158	35.8
505.mcf_r	4	110	58.9	110	59.0	109	59.1	4	110	58.9	110	59.0	109	59.1
520.omnetpp_r	4	271	19.4	271	19.4	270	19.4	4	271	19.4	271	19.4	270	19.4
523.xalancbmk_r	4	89.6	47.1	89.6	47.1	89.5	47.2	4	89.6	47.1	89.6	47.1	89.5	47.2
525.x264_r	4	81.6	85.8	82.0	85.4	81.4	86.1	4	79.9	87.7	79.7	87.9	79.8	87.8
531.deepsjeng_r	4	162	28.4	162	28.4	162	28.4	4	162	28.4	162	28.4	162	28.4
541.leela_r	4	276	24.0	275	24.1	275	24.1	4	276	24.0	275	24.1	275	24.1
548.exchange2_r	4	119	87.8	120	87.4	119	87.8	4	119	87.8	120	87.4	119	87.8
557.xz_r	4	296	14.6	296	14.6	296	14.6	4	296	14.6	296	14.6	296	14.6

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017_newbinaries/lib/intel64:/home/cpu2017_newbinaries/lib/ia3
2:/home/cpu2017_newbinaries/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.10 GHz, Intel Xeon E-2324G)

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2022
Hardware Availability: Sep-2022
Software Availability: Nov-2021

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute
Thermal Configuration set to Maximum Cooling
Enhanced Processor Performance set to Enabled
Minimum Processor Idle Power Package C-State set to No Package State
Intel Hyper-Threading set to Disabled

sysinfo program /home/cpu2017_newbinaries/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Mon Aug 8 23:47:27 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) E-2324G CPU @ 3.10GHz
1 "physical id"s (chips)
4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 4
physical 0: cores 0 1 2 3

From lscpu from util-linux 2.32.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 4
On-line CPU(s) list: 0-3
Thread(s) per core: 1
Core(s) per socket: 4
Socket(s): 1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.10 GHz, Intel Xeon E-2324G)

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2022
Hardware Availability: Sep-2022
Software Availability: Nov-2021

Platform Notes (Continued)

```

NUMA node(s): 1
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
CPU family: 6
Model: 167
Model name: Intel(R) Xeon(R) E-2324G CPU @ 3.10GHz
BIOS Model name: Intel(R) Xeon(R) E-2324G CPU @ 3.10GHz
Stepping: 1
CPU MHz: 3100.000
BogoMIPS: 6192.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 512K
L3 cache: 8192K
NUMA node0 CPU(s): 0-3
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelt rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust sgx bmi1 avx2 smep bmi2 erms invpcid mpx avx512f avx512dq rdseed
adx smap avx512ifma clflushopt intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid sgx_lc fsrm
md_clear flush_llid arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 8192 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 64325 MB
node 0 free: 63630 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal: 65869340 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.10 GHz, Intel Xeon E-2324G)

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2022
Hardware Availability: Sep-2022
Software Availability: Nov-2021

Platform Notes (Continued)

```

/sbin/tuned-adm active
  Current active profile: throughput-performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.5 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.5"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.5 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos

uname -a:
  Linux localhost.localdomain 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021
  x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):           Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):                Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                           Bypass disabled via prctl and
                                           seccomp
CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs
                                           barriers and __user pointer
                                           sanitization
CVE-2017-5715 (Spectre variant 2):       Mitigation: Enhanced IBRS, IBPB:
                                           conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Aug 8 23:45

SPEC is set to: /home/cpu2017_newbinaries
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   270G   70G  200G  26% /home

From /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant MicroServer Gen10 Plus v2

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.10 GHz, Intel Xeon E-2324G)

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2022
Hardware Availability: Sep-2022
Software Availability: Nov-2021

Platform Notes (Continued)

Product Family: ProLiant
Serial: MSG10PV2001

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
2x Micron 18ASF4G72AZ-3G2B1 32 GB 2 rank 3200

BIOS:
BIOS Vendor: HPE
BIOS Version: U64
BIOS Date: 06/30/2022
BIOS Revision: 1.60
Firmware Revision: 2.70

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.10 GHz, Intel Xeon E-2324G)

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2022
Hardware Availability: Sep-2022
Software Availability: Nov-2021

Compiler Version Notes (Continued)

=====
C | 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.4.0 Build 20210924

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2

(3.10 GHz, Intel Xeon E-2324G)

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

Compiler Version Notes (Continued)

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

```

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.4.0 Build 20210924

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

```

=====
Fortran  | 548.exchange2_r(base, peak)
=====

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.4.0 Build 20210910_000000

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.10 GHz, Intel Xeon E-2324G)

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2022
Hardware Availability: Sep-2022
Software Availability: Nov-2021

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.10 GHz, Intel Xeon E-2324G)

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2022
Hardware Availability: Sep-2022
Software Availability: Nov-2021

Peak Portability Flags (Continued)

525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.10 GHz, Intel Xeon E-2324G)

SPECrate®2017_int_base = 35.8

SPECrate®2017_int_peak = 36.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2022
Hardware Availability: Sep-2022
Software Availability: Nov-2021

Peak Optimization Flags (Continued)

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revF.html>

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revF.xml>

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-08-08 23:47:27-0400.

Report generated on 2022-09-13 16:57:19 by CPU2017 PDF formatter v6442.

Originally published on 2022-09-13.