



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_int\_base = 145

SPECrate®2017\_int\_peak = 149

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

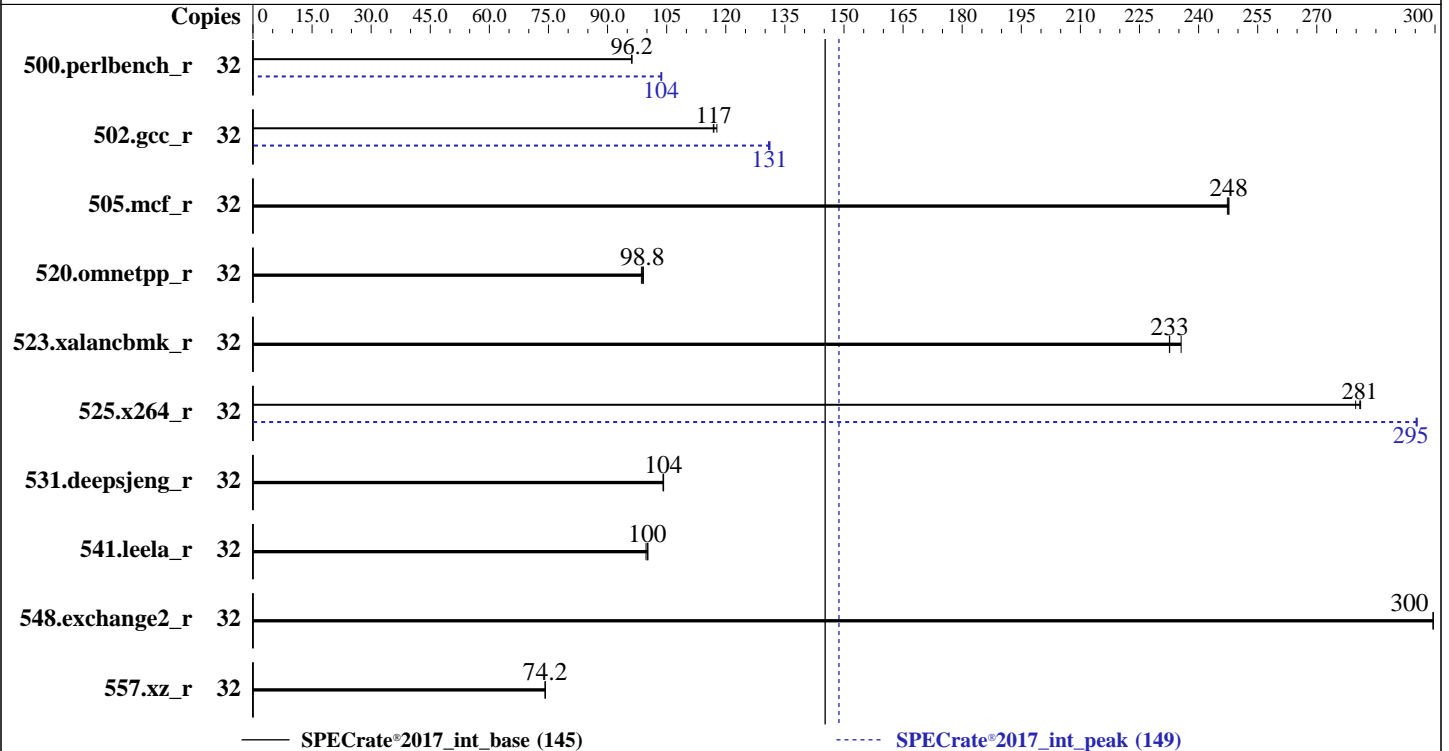

### Hardware

CPU Name: Intel Xeon Silver 4309Y  
 Max MHz: 3600  
 Nominal: 2800  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2666)  
 Storage: 1 x 1 TB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.25.1.el8\_4.x86\_64  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 0802 released Apr-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_int\_base = 145

SPECrate®2017\_int\_peak = 149

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	530	96.1	530	96.2	<b>530</b>	<b>96.2</b>	32	<b>492</b>	<b>104</b>	492	104	491	104
502.gcc_r	32	385	118	388	117	<b>387</b>	<b>117</b>	32	346	131	345	131	<b>346</b>	<b>131</b>
505.mcf_r	32	209	247	209	248	<b>209</b>	<b>248</b>	32	209	247	209	248	<b>209</b>	<b>248</b>
520.omnetpp_r	32	<b>425</b>	<b>98.8</b>	424	99.1	426	98.6	32	<b>425</b>	<b>98.8</b>	424	99.1	426	98.6
523.xalancbmk_r	32	<b>145</b>	<b>233</b>	143	236	145	233	32	<b>145</b>	<b>233</b>	143	236	145	233
525.x264_r	32	199	281	<b>199</b>	<b>281</b>	200	280	32	<b>190</b>	<b>295</b>	190	295	190	295
531.deepsjeng_r	32	352	104	<b>352</b>	<b>104</b>	352	104	32	352	104	<b>352</b>	<b>104</b>	352	104
541.leela_r	32	531	99.8	529	100	<b>529</b>	<b>100</b>	32	531	99.8	529	100	<b>529</b>	<b>100</b>
548.exchange2_r	32	280	300	280	300	<b>280</b>	<b>300</b>	32	280	300	280	300	<b>280</b>	<b>300</b>
557.xz_r	32	466	74.1	<b>466</b>	<b>74.2</b>	466	74.2	32	466	74.1	<b>466</b>	<b>74.2</b>	466	74.2

SPECrate®2017\_int\_base = 145

SPECrate®2017\_int\_peak = 149

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/ic22u1/lib/intel64:/home/ic22u1/lib/ia32:/home/ic22u1/je5.0.1-32"  
MALLOCONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_int\_base = 145

SPECrate®2017\_int\_peak = 149

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Aug-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:  
VT-d = Disabled  
Patrol Scrub = Disabled  
Engine Boost = Aggressive  
SR-IOV Support = Disabled  
BMC Configuration:  
Fan mode = Full speed mode

Sysinfo program /home/ic22ul/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Sat Aug 27 13:36:13 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 1 2 3 4 5 6 7  
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu from util-linux 2.32.1:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 32  
On-line CPU(s) list: 0-31  
Thread(s) per core: 2  
Core(s) per socket: 8  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_int\_base = 145

SPECrate®2017\_int\_peak = 149

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Aug-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

### Platform Notes (Continued)

```

BIOS Vendor ID: Intel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz
BIOS Model name: Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz
Stepping: 6
CPU MHz: 800.393
CPU max MHz: 3600.0000
CPU min MHz: 800.0000
BogoMIPS: 5600.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 12288K
NUMA node0 CPU(s): 0-7,16-23
NUMA node1 CPU(s): 8-15,24-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig
flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 515668 MB
node 0 free: 514117 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 516052 MB
node 1 free: 514093 MB
node distances:
node 0 1
0: 10 20
1: 20 10

```

```

From /proc/meminfo
MemTotal: 1056482336 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_int\_base = 145

SPECrate®2017\_int\_peak = 149

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Aug-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

## Platform Notes (Continued)

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.4 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.4"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.4:ga

uname -a:

Linux localhost.localdomain 4.18.0-305.25.1.el8\_4.x86\_64 #1 SMP Mon Oct 18 14:34:11

EDT 2021 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling):

Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 Aug 26 10:26

SPEC is set to: /home/ic22ul

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	878G	119G	760G	14%	/home

From /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.

Product: RS720-E10-RS12

Product Family: Server

Serial: 012345678901

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2666

BIOS:

BIOS Vendor: American Megatrends Inc.

BIOS Version: 0802

BIOS Date: 04/29/2022

BIOS Revision: 8.2

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_int\_base = 145

SPECrate®2017\_int\_peak = 149

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

## Platform Notes (Continued)

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbnk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E10(Z12PP-D32) Server System  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_int\_base = 145

SPECrate®2017\_int\_peak = 149

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Aug-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E10(Z12PP-D32) Server System  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_int\_base = 145

SPECrate®2017\_int\_peak = 149

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Aug-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallocc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_int\_base = 145

SPECrate®2017\_int\_peak = 149

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

## Peak Optimization Flags (Continued)

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.2022-10-12.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.2022-10-12.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-08-27 13:36:12-0400.

Report generated on 2024-01-29 17:07:46 by CPU2017 PDF formatter v6716.

Originally published on 2022-10-11.